


Data sheet

SMART CUTTER 1500 Vario Plus

Dry stone cutter

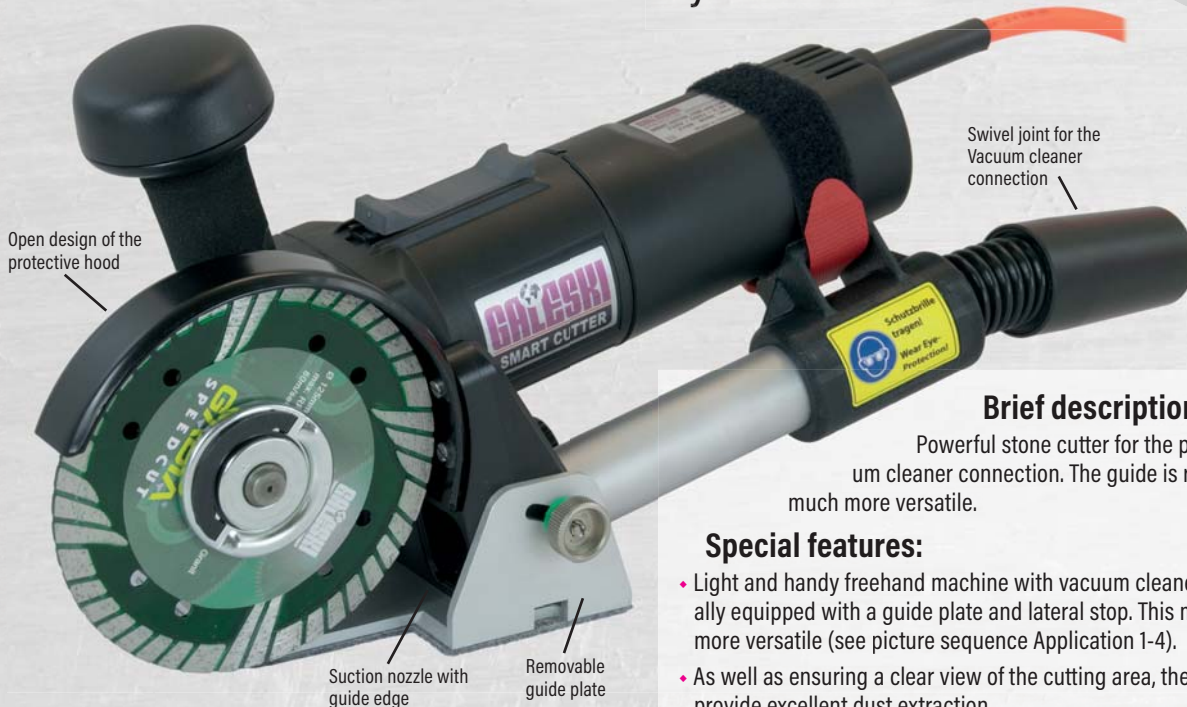

The guide plate can easily be removed for freehand cutting.

Open design of the protective hood

Swivel joint for the Vacuum cleaner connection

Suction nozzle with guide edge

Removable guide plate

Brief description:

Powerful stone cutter for the pulling cut, with guard and vacuum cleaner connection. The guide is removable, making the machine much more versatile.

Special features:

- Light and handy freehand machine with vacuum cleaner connection, which is additionally equipped with a guide plate and lateral stop. This makes the SMART CUTTER even more versatile (see picture sequence Application 1-4).
- As well as ensuring a clear view of the cutting area, the guard and suction nozzle provide excellent dust extraction.
- To make a right-angled freehand cut without guide plate, place the bottom edge of the suction nozzle (guide edge) on the stone, set the running disc into the stone (using a tilting motion over the guide edge), and following the guide edge, make the cut (Application 1).
- Spindle lock for easy tool changes.
- FIXTEC quick-change system for toolless disc change.
- Soft start and electronics for constant speed even under load.
- Temperature-dependent overload protection.
- Speed range designed for stone cutting with infinitely variable speed regulation.
- Wear-resistant and unbreakable silicone power cable in signal colour (clearly visible).
- Special requests (e.g. for longer connecting cables) can be considered.
- Repair service for all of our machines.

Application:

Dry stone cutter for natural or artificial stone processing. Especially suitable for stonemasons, sculptors, restorers, tilers, renovators, floor renovators, etc.

Technical Data:

Voltage:	230 Volt	Spindle / Borehole:	M 14 / 22.2 mm
Power:	1,520 Watt	Weight:	2.6 kg
Speed:	2,700 - 9,500 rpm	Soft start,	
Tool Ø max.:	125 mm	Overload protection	
Cutting depth max.	25 mm		

Included:

Silicone connecting cable 4 m, vacuum cleaner connection rotatable Ø 36-46 mm, removable guide plate with connection to guide rail, plastic coating with velcro, stopper plate, flange, FIXTEC flange nut, ball handle, case..

Available versions:

SMART CUTTER 1500 Vario Plus 230V

Item no.: 003.036.605



Application 1:

- freehand cut without guide plate
- right-angle cut in stone (pivot in with the guide plate)
- pulling cut
- with dust extraction.



Application 2:

- with guide plate
- depth of cut adjustment is variable
- pulling cut
- with dust extraction.



Application 3:

- with guide plate
- depth of cut adjustment is variable
- pulling cut
- with dust extraction.



Application 4:

- with guide plate
- use with GALESKI rail system for exact cuts
- pulling cut
- with dust extraction.