


Data sheet

ECOMAX 125 Vario

Wet and Dry stone cutter

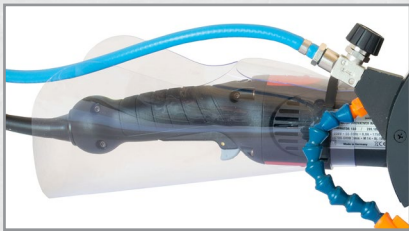

For a long service life, the machine body is fitted with a flexible plastic splash guard.



An easily removable cover that can be removed without tools.



Large clamping flange:

- gives additional stability. The cut-off wheel has less tendency to "vibrate".
- causes the cooling water to be thrown away in wet operation. An additional protection against water penetration.

Brief description:

One handed cut-off saw especially for thin ceramic or natural stone slabs.

Special features:

- The water supply takes place via an individually adjustable articulated hose with a preset water nozzle.
- A water regulating valve ensures a finely adjustable water quantity regulation.
- An easily removable cover sits in front of the protective cover. This can be easily removed when replacing the cutting wheel with only one star knob screw without tools.
- Proven, flexible and transparent splash guard. This means that less moisture and dirt is sucked into the engine compartment. This significantly increases the service life of the machine.
- Spindle lock for easy tool changes.
- Soft start and electronics for constant speed even under load.
- Temperature-dependent overload protection.
- Speed range designed for stone cutting with infinitely variable speed regulation.
- Special requests (e.g. for longer connecting cables or hoses) can be considered.
- Repair service for all of our machines.

Application:

Dry stone cutter for natural or artificial stone processing. Especially suitable for stonemasons, sculptors, restorers, tilers, renovators, floor renovators, etc.

Technical Data:

| | | | |
|--------------------|-------------------|---------------------|------------------|
| Voltage: | 230 Volt | Spindle thread: | M 14 / Ø 22.2 mm |
| Power: | 850 Watt | Weight: | 3.0 kg |
| Speed: | 1,900 - 9,500 rpm | Soft start, | |
| Tool Ø max.: | 125 mm | Overload protection | |
| Cutting depth max. | 25 mm | | |

Included:

Rubber connecting cable 4 m, personal protection switch PRCD or CEE-plug, hose 2.5 m with brass coupling, water control tap, jointed coolant hose, adjustable safety cover with removable front cover, flange and flange nut, twin hole wrench, side handle, splash guard, carton.

Available versions:

| | | |
|--|------|-----------------------|
| SMART CUTTER 125 Vario CEE (for transformer) | 230V | Item no.: 003.036.630 |
| SMART CUTTER 125 Vario DI (with PRCD) | 230V | Item no.: 003.036.631 |