



MANUFAKTUR INNOVATIVER MASCHINEN

Machines for every type of stone  
Proven & innovative.

Machines and accessories

Catalog 2025/26

## About us

When the company was established in 1990, our vision was to make working with stone easier, healthier, and more efficient. Our goal has always been to provide our customers with better ways to work with stone. To reach this goal, we right away abandoned old ways of developing and manufacturing, and set out to find new solutions.

The courage to go along a different path and establish new possibilities for working on stone has been rewarded. Today, craftsmen in companies all over the world use and trust Galeski products.

The Galeski company can look back at over 30 years of experience - and has many trailblazing innovations to show for it.

We can provide a comprehensive range of advanced machines and tools for professional stone processing. The machines are exceptionally robust and reliable - a pleasure to use long-term for the professional.

Galeski products stand for better results, more efficiency, and more safety. They are manufactured for continuous use and for easy repair. All spare parts can be supplied long after you first bought the machine.

Years of technological progress have made us ready for future challenges. So call us first - we will always be there with practical solutions for our customers throughout the world.

## Design and Development

- A decisive factor in the success of our products is careful planning and design.
- Practice-oriented solutions - from the prototype through to production - are developed right here on the premises.

## Parts Production

- We are well-equipped with all the right machines to make parts from the prototype right up to series production, as well as cater to special customer requests and custom-made products. Nearby processing companies are used for larger series and special parts.

## Assembly

- The machines are made manually to order. This increases our flexibility in meeting our customers' needs when it comes to technical features and design required (e.g. cable and/or hose length). Quick delivery is ensured by pre-assembly of components for manual production. All our machines are individually tested before shipment.

## Service

- Galeski machines were made to feel good when working with them. Whether maintenance, repair or spare parts: our service department is there to make sure your machine is returned in working order as soon as possible. We know how much you need your machines.



## ACCOUNTING

Phone: +49 (0) 2663-9437-0 • E-Mail: info@galeski.de

## EXPORT / SHIPPING

Phone: +49 (0) 2663-9437-30 • E-Mail: export@galeski.de

## DISTRIBUTION

Phone: +49 (0) 2663-9437-31 • E-Mail: vertrieb@galeski.de

## REPAIRS / SERVICE

Phone: +49 (0) 2663-9437-28 • E-Mail: service@galeski.de

## MOUNTING / PRODUCTION

Phone: +49 (0) 2663-9437-31 • E-Mail: vertrieb@galeski.de

## MARKETING / SOCIAL MEDIA

Phone: +49 (0) 2663-9437-12 • E-Mail: marketing@galeski.de

## APPLICATIONS

E-Mail: bewerbung@galeski.de

**Head office**  
**+49 (0) 26 63 94 37-0**

## OPENING TIMES

Monday - Thursday 8:00-12:00 and 13:00-16:00  
Friday 8:00-14:00

## SOCIAL MEDIA



### Internet

www.galeski.de




### YouTube


Galeski westerburg




Galeski Manufaktur  
innovativer Maschinen

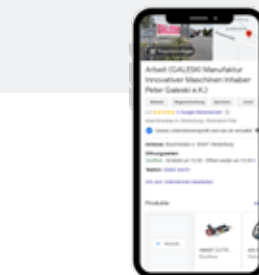

Galeski Manufaktur innovati-  
ver Maschinen

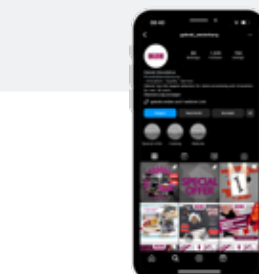

galeski\_westerburg



business

+49 (0) 26 63 94 37 0



# ... Up Close !

## MANUFACTURERS OF INNOVATIVE MACHINES

that means:

As we manufacture our machines in small series, even in single units, we can make what our customers want and need.

Unlike larger manufacturers, we enjoy receiving special requests.

Is the standard 4-meter cable too short? No problem. How long do you want it? 5, 6, 8, 10 meters, or even longer?

That´s just one example ...

Water hoses, water control valves (with or without the closing valve), motors, machine extras, and so on, can be adapted individually.

We look forward to hearing your requests and ideas.

that means:

Most of our machines are more than just ordinary standard. We have included many innovative and practical ideas. For example:

SPLASH GUARD - this is a standard part on all our POLIFOX machines, but is removable. It is especially useful in the wet grinding sector because it stops water vapor combined with wet stone dust being drawn into the machine. An important factor which contributes to the long life of our machines.

But that buzzing feeling you know from other machines when working with water, is also considerably reduced.

Discover more ...

Splash Guard:  
A practical and flexible guard that won't bother you when working.





# ... Up Close !

## What if ...

### Service I:

Our machines are known for their long life ...

... they live even longer with our **maintenance**.

You actually save money by regular maintenance of your machine because you avoid machine breakdowns (when you need them least), and resulting repairs.

We offer:

- maintenance cleaning
- exchange of wear parts
- settings and adjustment
- lubrication



### Service II:

Heeeeelp! ... Nothing´s working.  
**Breakdowns** do happen.

We are here to help quickly and skillfully.

For the little problems, we´ll send you the spare parts you need.

For larger repairs, as soon as we receive your okay to our cost estimate, we´ll promptly fix your machine.

**JOKER SPEED BL** - Drilling, milling and grinding machine

W

Powerful professional all-round machine, suitable for high speed use.

**Technical Data:**

|               |                  |                |        |
|---------------|------------------|----------------|--------|
| Power         | 1,400 Watt       | Spindle        | M 14   |
| Voltage       | 230 Volt         | Weight         | 3.3 kg |
| Speed         | 2,500-10,000 rpm | Soft start     |        |
| Drill-Ø max.: | 50 mm            | Restart cutout |        |
| Tool Ø max.:  | 125 mm           |                |        |

**Included:**

Silicone connecting cable 4 m · hose 2.5 m with brass quick coupling · bail handle · personal protection switch PRCD or CEE-plug · splash guard · carton.

**Available versions:**

|                    |                   |      |                                |                      |
|--------------------|-------------------|------|--------------------------------|----------------------|
| JOKER SPEED BL DI  | (with PRCD)       | 230V | Item no.                       | Price net.           |
| JOKER SPEED BL CEE | (for transformer) | 230V | 001.003.017BL<br>001.003.015BL | 643.00 €<br>603.00 € |

Special features of the JOKER family and other JOKER models see [page 18](#)

**GENIUS SPEED BL** - Angle grinder

D

Handle angle grinder in the best speed range for cutting.

**Technical Data:**

|             |                  |                |              |
|-------------|------------------|----------------|--------------|
| Power       | 1,400 Watt       | Spindle/Bore   | M 14/22.2 mm |
| Voltage     | 230 Volt         | Weight         | 2.6 kg       |
| Speed       | 2,500-10,000 rpm | Soft start     |              |
| Tool Ø max. | 125 mm           | Restart cutout |              |

**Included:**

Silicone connecting cable 4 m · protective hood · side handle · flange · flange nut · carton.

**Available versions:**

|                       |      |            |            |
|-----------------------|------|------------|------------|
| GENIUS SPEED BL Vario | 230V | Item no.   | Price net. |
|                       |      | 036.046BL2 | 328.00 €   |

Other GENIUS models see [page 14](#)

**GENIUS MAXI BL** - Angle grinder

D

All-round angle grinder for grinding and cutting.

**Technical Data:**

|             |                 |                |              |
|-------------|-----------------|----------------|--------------|
| Power       | 1,400 Watt      | Spindle/Bore   | M 14/22.2 mm |
| Voltage     | 230 Volt        | Weight         | 2.8 kg       |
| Speed       | 1,600-6,400 rpm | Soft start     |              |
| Tool Ø max. | 150 mm          | Restart cutout |              |

**Included:**

Silicone connecting cable 4 m · protective hood · side handle · flange · FIXTEC-flange nut · carton.

**Available versions:**

|                      |      |               |            |
|----------------------|------|---------------|------------|
| GENIUS MAXI BL Vario | 230V | Item no.      | Price net. |
|                      |      | 003.036.031BL | 466.00 €   |

Other GENIUS models see [page 14](#)

**JOKER MAXI BL** - Drilling, milling, grinding and polishing machine

W

Powerful professional all-round machine, suitable for continuous use.

**Technical Data:**

|               |                 |                |        |
|---------------|-----------------|----------------|--------|
| Power         | 1,400 Watt      | Spindle        | M 14   |
| Voltage       | 230 Volt        | Weight         | 3.3 kg |
| Speed         | 1,600-6,400 rpm | Soft start     |        |
| Drill-Ø max.: | 50 mm           | Restart cutout |        |
| Tool Ø max.:  | 125 mm          |                |        |

**Included:**

Silicone connecting cable 4 m · hose 2.5 m with brass quick coupling · bail handle · personal protection switch PRCD or CEE-plug · splash guard · carton.

**Available versions:**

|                         |                   |      |                                |                      |
|-------------------------|-------------------|------|--------------------------------|----------------------|
| JOKER MAXI BL Vario DI  | (with PRCD)       | 230V | Item no.                       | Price net.           |
| JOKER MAXI BL Vario CEE | (for transformer) | 230V | 001.003.035BL<br>001.003.034BL | 658.00 €<br>618.00 € |
| JOKER MAXI BL Con DI    | (with PRCD)       | 230V | 001.003.044CON                 | 658.00 €             |
| JOKER MAXI BL Con CEE   | (for transformer) | 230V | 001.003.041CON                 | 618.00 €             |

Special features of the JOKER family and other JOKER models see [page 18](#)

**TORNADO MAXI BL** - Grinding machine

D

Powerful motor and high quality gear unit for hard continuous use at low speed. Ergonomic bail handle and autobalancer reduce work fatigue.

**Technical Data:**

|              |                 |                |                |
|--------------|-----------------|----------------|----------------|
| Power        | 1,400 Watt      | Spindle/Bore   | M 14 / 22.2 mm |
| Voltage      | 230 Volt        | Weight         | 3.5 kg         |
| Speed        | 1,600-6,400 rpm | Soft start     |                |
| Tool Ø max.: | 125 mm          | Restart cutout |                |

**Included:**

Silicone connecting cable 4 m · bail handle · flange nut · autobalancer · twin hole wrench · hose connector · hose adapter 40 cm long · spring loaded brush ring with foldable front flap · case.

**Available versions:**

|                 |      |               |            |
|-----------------|------|---------------|------------|
| TORNADO MAXI BL | 230V | Item no.      | Price net. |
|                 |      | 003.036.123BL | 975.00 €   |

Special features of the TORNADO family and other TORNADO models see [page 18](#)

# BRUSHLESS machine series: Electric motor without carbon brushes!

- The previously necessary, regular carbon replacement is completely eliminated. Therefore: less follow-up costs, less work, fewer sources of error.
- Significantly more torque. This is particularly noticeable in the lower speed range.
- High efficiency (Up to +30%). The omitted frictional resistance of the brushes and other factors result in higher efficiency.

- Long service life. The service life of ordinary brand machines is significantly exceeded.
- Significantly less heat generation of the running machine, even under full load.
- Slim design. Handy, small and light machine for low-fatigue work.
- Machine comes to a quick stop when switched off - by rapid braking of the magnetic motor.

## SMART CUTTER 125 ECO BL - Cutter

D

Easy to handle stone cutter for the pulling cut, with guard and vacuum cleaner connection.



### Technical Data:

|                    |                 |                |                |
|--------------------|-----------------|----------------|----------------|
| Power              | 1,400 Watt      | Spindle/Bore   | M 14 / 22.2 mm |
| Voltage            | 230 Volt        | Weight         | 2.8 kg         |
| Speed              | 1,600-6,400 rpm | Soft start     |                |
| Tool Ø max.:       | 125 mm          | Restart cutout |                |
| Cutting depth max. | 20 mm           |                |                |

### Included:

Silicone connecting cable 4 m • vacuum cleaner connection rotatable Ø 36-40 mm • flange • flange nut • twin hole wrench • ball handle • carton.

### Available versions:

| Item no.                     | Price net.             |
|------------------------------|------------------------|
| SMART CUTTER 125 Eco BL 230V | 003.036.600BL 465.00 € |

Special features of the SMART CUTTER family and other SMART CUTTER models see [page 30](#)

## SMART CUTTER 125 PLUS BL - Cutter

D

Easy to handle stone cutter for the pulling cut, with guard and vacuum cleaner connection. The guide is removable, making the machine much more versatile..



### Technical Data:

|                    |                 |                |                |
|--------------------|-----------------|----------------|----------------|
| Power              | 1,400 Watt      | Spindle/Bore   | M 14 / 22.2 mm |
| Voltage            | 230 Volt        | Weight         | 3.3 kg         |
| Speed              | 1,600-6,400 rpm | Soft start     |                |
| Tool Ø max.:       | 125 mm          | Restart cutout |                |
| Cutting depth max. | 20 mm           |                |                |

### Included:

Silicone connecting cable 4 m • vacuum cleaner connection rotatable Ø 36-40 mm • removable guide plate with connection to guide rail • lateral stop • plastic coating with velcro • flange • FIXTEC flange nut • ball handle • case.

### Available versions:

| Item no.                      | Price net.             |
|-------------------------------|------------------------|
| SMART CUTTER 125 Plus BL 230V | 003.036.602BL 598.00 € |

Special features of the SMART CUTTER family and other SMART CUTTER models see [page 30](#)

## DOMINATOR 125 BL - Cutter

D

Compact, powerful cutter with connection for a dust extraction.



### Technical Data:

|                    |                 |                |              |
|--------------------|-----------------|----------------|--------------|
| Power              | 1,400 Watt      | Spindle/Bore   | M 14/22.2 mm |
| Voltage            | 230 Volt        | Weight         | 3.5 kg       |
| Speed              | 1,600-6,400 rpm | Soft start     |              |
| Tool Ø max.        | 125 mm          | Restart cutout |              |
| Cutting depth max. | 30 mm           |                |              |

### Included:

Silicone connecting cable 4 m • aluminium safety cover with plastic inserts and connection for vacuum cleaner • 65 cm extractor hose inside Ø 32 mm • hose connector with Velcro fastening • 4 shims • handle • flange • flange nut • twin hole wrench • carton/case.

### Available versions:

| Item no.                     | Price net.             |
|------------------------------|------------------------|
| DOMINATOR 125 BL 230V carton | 003.036.357BL 598.00 € |
| DOMINATOR 125 BL 230V case   | 003.036.353BL 668.00 € |

Special features of the DOMINATOR family and other DOMINATOR models see [page 34](#)

## ECOMAX 125 BL - Wet and dry stone cutter

D

W

Flexible applicable machine in the high speed range with external water supply.



### Technical Data:

|                    |                  |                |              |
|--------------------|------------------|----------------|--------------|
| Power              | 1,400 Watt       | Spindle/Bore   | M 14/22.2 mm |
| Voltage            | 230 Volt         | Weight         | 3.1 kg       |
| Speed              | 2,500-10,000 rpm | Soft start     |              |
| Tool Ø max.        | 125 mm           | Restart cutout |              |
| Cutting depth max. | 25 mm            |                |              |

### Included:

Silicone connecting cable 4 m • personal protection switch PRCD or CEE-plug • hose 2.5 m with brass coupling • water control tap • jointed coolant hose • adjustable safety cover with removable front cover • flange and flange nut • twin hole wrench • side handle • splash guard • carton.

### Available versions:

| Item no.                                 | Price net.              |
|------------------------------------------|-------------------------|
| ECOMAX 125 BL DI (with PRCD) 230V        | 003.036.631BL2 489.00 € |
| ECOMAX 125 BL CEE (for transformer) 230V | 003.036.630BL 449.00 €  |

Special features of the DOMINATOR family and other DOMINATOR models see [page 36](#)

**ATLAS PRO BL - Milling cutter** D

Hand milling machine for removal of mineral materials in a width of 82 mm.

**Technical Data:**

|                    |            |                |        |
|--------------------|------------|----------------|--------|
| Power              | 1,400 Watt | Tool Ø max.    | 98 mm  |
| Voltage            | 230 Volt   | Spindle        | M 14   |
| Speed              | 6,400 rpm  | Weight         | 4.5 kg |
| Working depth      | 0 - 8 mm   | Soft start     |        |
| Working width max. | 82 mm      | Restart cutout |        |

**Included:**

Silicone connecting cable 4 m • protective hood with connector for vacuum cleaner • twin hole wrench • 6 mm allen wrench • case.

**Available versions:**

|                   | Item no.       | Price net. |
|-------------------|----------------|------------|
| ATLAS PRO BL 230V | 003.036.800BL2 | 1,842.00 € |

Special features of the ATLAS family and other ATLAS models see **page 56**

**ATLAS MAX BL - Milling cutter** D

Hand milling machine for removal of mineral materials in a width of 82 mm.

**Technical Data:**

|                    |            |                |        |
|--------------------|------------|----------------|--------|
| Power              | 1,400 Watt | Tool Ø max.    | 98 mm  |
| Voltage            | 230 Volt   | Spindle        | M 14   |
| Speed              | 6,400 rpm  | Weight         | 4.9 kg |
| Working depth      | 0 - 8 mm   | Soft start     |        |
| Working width max. | 82 mm      | Restart cutout |        |

**Included:**

Silicone connecting cable 4 m • protection hood with dust extraction hose • connector to vacuum cleaner • twin hole wrench • 6 mm allen wrench • case

**Available versions:**

|                   | Item no.       | Price net. |
|-------------------|----------------|------------|
| ATLAS MAX BL 230V | 003.036.802BL2 | 2,188.00 € |

Special features of the ATLAS family and other ATLAS models see **page 56**

**COMBINATOR MAXI BL - Surface drill stand system** W

Complete wet surface drilling system for holes up to Ø 70 mm.

**Technical Data:**

|                   |                 |
|-------------------|-----------------|
| Power             | 1,400 Watt      |
| Voltage           | 230 Volt        |
| Speed             | 1,600-6,400 rpm |
| Drill stroke max. | 150 or 230 mm   |
| Drill Ø max.      | 70 mm           |
| Spindle:          | M 14 / R1/2"    |
| Weight:           | 6.8 kg          |
| Soft start        |                 |
| Restart cutout    |                 |

**Included:**

**Drilling motor COMBINATOR MAXI:** Silicon connecting cable 4 m • personal protection switch PRCD or CEE plug • water hose 2.5 m with brass quick coupling • water regulating valve and water stopcock • bow handle • drill bit holders for M14 and R1/2"

**Double column drill stand with drill stroke 150 or 230 mm:** with rubberized base plate • water collection opening and hose connection for suction • hose and adapter for water suction • 3x plastic splash guards with drill opening Ø -22/-40/-68 mm • center point finder • 2x lever suction cups Ø 120 mm with clamp holder on drill column • handle • allen key 5 mm • carton.

**Available versions:**

|                                                                     | Item no.      | Price net. |
|---------------------------------------------------------------------|---------------|------------|
| COMBINATOR MAXI BL, drill stroke 150 mm 230V, DI (with PRCD)        | 002.022.001BL | 1,749.00 € |
| COMBINATOR MAXI BL, drill stroke 150 mm 230V, CEE (for transformer) | 002.022.049BL | 1,699.00 € |
| COMBINATOR MAXI BL, drill stroke 230 mm 230V, DI (with PRCD)        | 002.022.014BL | 1,798.00 € |
| COMBINATOR MAXI BL, drill stroke 230 mm 230V, CEE (for transformer) | 002.022.059BL | 1,758.00 € |
| Drilling motor COMBINATOR MAXI BL, 230V, DI (with PRCD)             | 002.022.005BL | 767.00 €   |
| Drilling motor COMBINATOR MAXI BL, 230V, CEE (for transformer)      | 002.022.048BL | 727.00 €   |

Special features of the COMBINATOR family and other COMBINATOR models see **page 48**

**CONTOUR CAT KS80 BL - Edge processing system** W

A handy machine together with a perfectly matched range of tools for professional work on the stone edge. Applications at the edge: milling, grinding, polishing, profiling, groove milling, etc.

**Technical Data:**

|                        |                        |                      |        |
|------------------------|------------------------|----------------------|--------|
| Power                  | 1,400 Watt             | Spindle              | M 14   |
| Voltage                | 230 Volt               | Weight               | 4.9 kg |
| Speed                  | 1,600-6,400 rpm        | Soft start           |        |
| Grinding height max.   | 60 mm                  | Restart cutout       |        |
| Height adjustment max. | 25 mm                  |                      |        |
| Tool Ø max.            | profile grinder 118 mm | cut-off wheel 180 mm |        |

**Included:**

Base plate with felt on the underside and stepless height adjustment • water supply inside and outside with 2 jointed coolant hoses with nozzle • water control valve • hose 2.5 m with brass quick coupling • silicone connecting cable 4 m • knob handle • personal protection switch PRCD or CEE-plug • wrench size 24/27 mm • case.

**Available versions:**

|                                                 | Item no.      | Price net. |
|-------------------------------------------------|---------------|------------|
| CONTOUR CAT KS 80 BL DI 230V (with PRCD)        | 001.000.107BL | 1,792.00 € |
| CONTOUR CAT KS 80 BL CEE 230V (for transformer) | 001.000.106BL | 1,752.00 € |

Special features of the CONTOUR CAT and other CONTOUR CAT models see **page 61**

Versatile use with guide plate - **GALESKI WETCUT 180/3**



• **WETCUT 180/3** Wet stone cutter

**W**

• **WETCUT 180/3 PLUS**

**W D**

Wet and dry cutter with suction device

• **WETCUT SUCTION COVER**

**W D**

Retrofit set for all WETCUT GS and WETCUT 180/2 „Classic“ machines

## Brief description:

Precision wet or dry cutter with removable base plate.

## Special features:

- ◆ Closed protective hood with height (8mm) adjustable housing cover:


1. If **maximum splash protection** is required (or with the PLUS variant: max. suction), the housing cover is set in the lowest position.

2. If **maximum visibility** is required, the housing cover is set in the uppermost position.


- ◆ Three red „markers“ ensure that even when the separator has become „invisible“ for the best possible splash protection, it remains visible to the outside.

### Marker 1:

Marking of the exact **cutting line** of the cutting disc(s) or milling cutter(s) used. Marker is precisely adjustable laterally and can also be swiveled vertically.

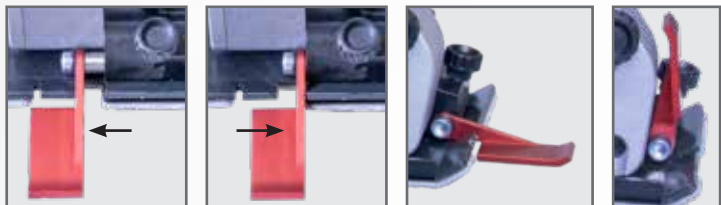

**Marker 2 and 3:** Marking of the front and rear cutting edge of the cutting disc(s) or milling cutter(s) used. Markers are precisely adjustable.

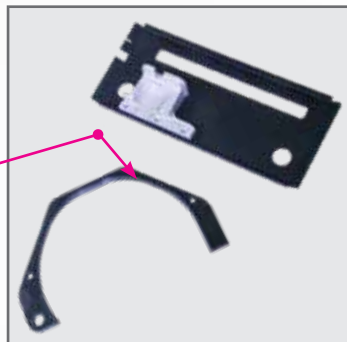

- ◆ Milling grooves up to 8 mm wide. In conjunction with a conversion set (spacer and adapted foot plate), a suitably wide milling disc, or several cutting discs side by side, can be mounted.



- ◆ Removable magnetic felt pad. Quick changeover for work on sensitive surfaces.



- ◆ Work with GADIA LINE rail system (accessories). Stable and accurate guide for cutting and milling.





- ◆ Stable and large stainless steel side stop.



- ◆ With extraction cover, the WETCUT becomes an „all-rounder“: In the Wetcut 180/3 PLUS model variant, the machine is equipped with an extraction cover. This variant leaves nothing to be desired. Both wet and dry cuts can be performed with suction, using an appropriately connected wet vacuum cleaner. Owners of an older Wetcut GS or Wetcut 180/2 can retrofit this machine with the suction cover at any time.



- ◆ Removable base plate for free cutting up to 57 mm cutting depth.



#### MOREOVER:

- ◆ Cutting depth continuously adjustable up to 52 mm (with base plate).
- ◆ "ERGOTEC" anti-vibration handle:  
The soft grip foam handle is safe and good to hold.
- ◆ Wear and break resistant silicone power cord in signal color (highly visible)
- ◆ Soft start and electronics for constant speed even under load.
- ◆ Temperature-dependent overload protection.
- ◆ Spindle lock for easy tool change.
- ◆ Speed range designed for cut-off cutting with infinitely variable speed control.
- ◆ Two service flaps for easy replacement of carbon brushes.
- ◆ Ergonomic design (with handle and bail handle) for low-fatigue work.
- ◆ Special requests (e.g. for longer connecting cables or hoses) can be considered.
- ◆ Repair service for all of our machines.

us



#### Technical Data:

|                    |                  |
|--------------------|------------------|
| Voltage:           | 230 Volt         |
| Power:             | 1,750 Watt       |
| Speed:             | 1,700-6,800 rpm  |
| Tool Ø max.:       | 180 mm           |
| Cutting depth max. | 52 (57) mm       |
| Spindle thread:    | M 14 / Ø 22.2 mm |
| Weight "Classic":  | 6.0 kg           |
| Weight "Plus":     | 6.2 kg           |



### WETCUT 180/3 // CUTTER

W

#### Technical Data

|                    |                                   |
|--------------------|-----------------------------------|
| Power              | 1,750 Watt                        |
| Voltage            | 230 / 115 Volt                    |
| Speed              | 1,700 - 6,800 rpm                 |
| Weight             | 6.0 kg                            |
| Tool max.          | 180 mm                            |
| Cutting depth max. | 52 mm (57 mm without guide plate) |
| Spindle/Bore       | M14 / Ø 22.2 mm                   |

#### Included

Silicone connecting cable 4 m · hose 2.5 m with brass quick coupling · water control valve · protective cover with height adjustable lid · three pieces of marker · removable guide plate · magnetic felt plate · side stop · "ERGOTEC" bail handle · personal protection switch PRCD or CEE-plug · cable hose connector with velcro fastener · flange and flange nut · twin hole wrench · case.

#### Available versions

| Available versions                       | Item no.    | Price net. |
|------------------------------------------|-------------|------------|
| WETCUT 180/3 DI (with PRCD) 230 V        | 007.000.138 | 1,245.00 € |
| WETCUT 180/3 CEE (for transformer) 230 V | 007.000.139 | 1,205.00 € |
| WETCUT 180/3 DI (with PRCD) 115 V        | 007.000.140 | 1,245.00 € |
| WETCUT 180/3 CEE (for transformer) 115 V | 007.000.141 | 1,205.00 € |



### WETCUT 180/3 PLUS // CUTTER

D W

with suction device

#### Technical Data

|                    |                                   |
|--------------------|-----------------------------------|
| Power              | 1,750 Watt                        |
| Voltage            | 230 / 115 Volt                    |
| Speed              | 1,700 - 6,800 rpm                 |
| Weight             | 6.2 kg                            |
| Tool max.:         | 180 mm                            |
| Cutting depth max. | 52 mm (57 mm without guide plate) |
| Spindle/Bore       | M14 / Ø 22.2 mm                   |

#### Included

Silicone connecting cable 4 m · hose 2.5 m with brass quick coupling · protective cover with height adjustable lid · suction cover with suction hose and swivel connection for vacuum cleaner · water control valve · three pieces of marker · removable guide plate · magnetic felt plate · side stop · "ERGO-TEC" bail handle · personal protection switch PRCD or CEE-plug · cable hose connector with velcro fastener · flange and flange nut · twin hole wrench · additional protective cover without suction device · case.

#### Available versions

| Available versions                            | Item no.    | Price net. |
|-----------------------------------------------|-------------|------------|
| WETCUT 180/3 PLUS DI (with PRCD) 230 V        | 007.000.144 | 1,557.00 € |
| WETCUT 180/3 PLUS CEE (for transformer) 230 V | 007.000.143 | 1,517.00 € |
| WETCUT 180/3 PLUS DI (with PRCD) 115 V        | 007.000.145 | 1,557.00 € |
| WETCUT 180/3 PLUS CEE (for transformer) 115 V | 007.000.146 | 1,517.00 € |



### SUCTION COVER

D W

#### Application

WETCUT GS · WETCUT 180/2 · WETCUT 180/3

#### Included

Protective cover with height adjustable lid · suction cover with suction hose and swivel connection for vacuum cleaner · cable hose connector with velcro fastener.

#### Available versions

| Available versions            | Item no.    | Price net. |
|-------------------------------|-------------|------------|
| WETCUT SUCTION COVER complete | 150.001.023 | 299.00 €   |

### "GROOVING MILLS" RESTORING SET 8 mm

#### Application

WETCUT GS · WETCUT 180/2 · WETCUT 180/3 · WETCUT 180/3 PLUS

#### Included

Adapted guide plate with wide opening · spacer for cover.

#### Available versions

| Available versions                    | Item no.    | Price net. |
|---------------------------------------|-------------|------------|
| WETCUT RESTORING SET MILLING complete | 150.000.021 | 136.00 €   |



# GALESKI KP - Handy stone edge polisher for straight edges!



Cleanly polished, precisely angled stone edges!

- made easy
- also for inexperienced hands
- even with thin stone slabs

## GENIUS KP80 / KP100

Edge polisher



- Velcro plastic plate for rough surfaces.
- Felt covering for sensitive surfaces.

## POLIFOX KP80 / KP100

Edge polisher



Quick and easy tool change by positioning the machine to the base plate with a flat guide incl. clamping.

### POLIFOX KP - Edge polisher

W

#### Technical Data:

|         |                 |                     | KP80   | KP100  |
|---------|-----------------|---------------------|--------|--------|
| Power   | 890 Watt        | Tool Ø max.         | 80mm   | 100mm  |
| Voltage | 230 Volt        | Slab thickness max. | 30mm   | 50mm   |
| Speed   | 1,000-4,000 rpm | Weight              | 5.2 kg | 5.2 kg |
| Spindle | M 14            |                     |        |        |

#### Included:

Rubber connecting cable 4 m - water hose 2.5 m with brass quick coupling - bow handle - aluminum base plate with ball handle and felt pad - velcro plastic plate - motor holder 90° removable with cross handle screw - aluminum plate Ø 80 or 100 mm - splash guard - personal protection switch PRCD or CEE-plug - carton.

#### Available versions:

|                                          | Item no.    | Price net. |
|------------------------------------------|-------------|------------|
| With aluminium plate Ø 80 mm:            |             |            |
| POLIFOX KP80 DI 230V (with PRCD)         | 003.036.700 | 859.00 €   |
| POLIFOX KP80 CEE 230V (for transformer)  | 003.036.705 | 819.00 €   |
| With aluminium plate Ø 100 mm:           |             |            |
| POLIFOX KP100 DI 230V (with PRCD)        | 003.036.703 | 869.00 €   |
| POLIFOX KP100 CEE 230V (for transformer) | 003.036.706 | 829.00 €   |

### GENIUS KP - Edge polisher

D

#### Technical Data:

|         |                 |                     | KP80   | KP100  |
|---------|-----------------|---------------------|--------|--------|
| Power   | 890 Watt        | Tool Ø max.         | 80mm   | 100mm  |
| Voltage | 230 Volt        | Slab thickness max. | 30mm   | 50mm   |
| Speed   | 1.000-4,000 rpm | Weight              | 4.3 kg | 4.3 kg |
| Spindle | M 14            |                     |        |        |

#### Included:

Rubber connecting cable 4 m - bow handle - aluminum base plate with ball handle and felt pad - velcro plastic plate - motor holder 90° removable with cross handle screw - aluminum plate Ø 80 or 100 mm - carton.

#### Available versions:

|                                | Item no.    | Price net. |
|--------------------------------|-------------|------------|
| With aluminium plate Ø 80 mm:  |             |            |
| GENIUS KP80 230V               | 003.036.702 | 664.00 €   |
| With aluminium plate Ø 100 mm: |             |            |
| GENIUS KP100 230V              | 003.036.704 | 675.00 €   |

## Dry Angle grinder and polisher **GALESKI GENIUS**

► **GENIUS:** infinitely variable speed regulation (except CON machines) - constant electronic speed control with soft start, even under load - thermal overload protection - spindle lock for easy disc change - ergonomic design to reduce work fatigue.

### GENIUS SPEED VARIO // Dry angle grinder

**D**


Grinder with lots of power reserves, comfortable handling when milling and cutting.

| Technical data |                   | Included                                                                                         |
|----------------|-------------------|--------------------------------------------------------------------------------------------------|
| Power          | 1,520 Watt        | Silicone connecting cable 4 m, protective hood, side handle, flange, FIXTEC- flange nut, carton. |
| Voltage        | 230 Volt          |                                                                                                  |
| Speed          | 2,700 - 9,500 rpm |                                                                                                  |
| Tool max.      | 125 mm            |                                                                                                  |
| Spindle thread | M14               |                                                                                                  |
| Weight         | 2.9 kg            |                                                                                                  |

| Available versions      | Item no. | Price net. |
|-------------------------|----------|------------|
| GENIUS SPEED VARIO 230V | 036.046  | 310.00 €   |

### GENIUS MAXI CON // Dry angle grinder

**D**


Powerful one-hand grinder - constant speed control with lots of power reserves for continuous running.

| Technical data |            | Included                                                                                        |
|----------------|------------|-------------------------------------------------------------------------------------------------|
| Power          | 1,550 Watt | Silicone connecting cable 4 m, protective hood, side handle, flange, FIXTEC flange nut, carton. |
| Voltage        | 230 Volt   |                                                                                                 |
| Speed          | 6,800 rpm  |                                                                                                 |
| Tool max.      | 150 mm     |                                                                                                 |
| Spindle thread | M14        |                                                                                                 |
| Weight         | 2.9 kg     |                                                                                                 |

| Available versions   | Item no.       | Price net. |
|----------------------|----------------|------------|
| GENIUS MAXI CON 230V | 003.036.031CON | 405.00 €   |
| GENIUS MAXI CON 115V | 003.036.032CON | 405.00 €   |

### GENIUS MAXI/2 VARIO // Dry angle grinder

**D**


Strong and compact grinder, has high-quality gearbox and reinforced spindle bearing for heavy work.

| Technical data |                   | Included                                                                                        |
|----------------|-------------------|-------------------------------------------------------------------------------------------------|
| Power          | 1,750 Watt        | Silicone connecting cable 4 m, protective hood, side handle, flange, FIXTEC flange nut, carton. |
| Voltage        | 230 / 115 Volt    |                                                                                                 |
| Speed          | 1,700 - 6,800 rpm |                                                                                                 |
| Tool max.      | 150 mm            |                                                                                                 |
| Spindle thread | M14               |                                                                                                 |
| Weight         | 2.9 kg            |                                                                                                 |

| Available versions       | Item no.    | Price net. |
|--------------------------|-------------|------------|
| GENIUS MAXI/2 VARIO 230V | 003.036.031 | 415.00 €   |
| GENIUS MAXI/2 VARIO 115V | 003.036.032 | 415.00 €   |

### GENIUS 2400 MAXI CON // Dry angle grinder

**D**


Rotatable switch handle with 7 different grid positions

Large powerful angle grinder with vibration dampened handle.

| Technical data |            | Included                                                                                        |
|----------------|------------|-------------------------------------------------------------------------------------------------|
| Power          | 2,400 Watt | Silicone connecting cable 4 m, protective hood, side handle, flange, FIXTEC flange nut, carton. |
| Voltage        | 230 Volt   |                                                                                                 |
| Speed          | 6,600 rpm  |                                                                                                 |
| Tool max.      | 230 mm     |                                                                                                 |
| Spindle thread | M14        |                                                                                                 |
| Weight         | 5.6 kg     |                                                                                                 |

| Available versions        | Item no.    | Price net. |
|---------------------------|-------------|------------|
| GENIUS 2400 MAXI CON 230V | 003.036.059 | 311.00 €   |

## &gt;&gt; ANGLE POLISHER &lt;&lt;

### GENIUS 900 CON / VARIO // Dry angle polisher

**D**


Compact dry polisher for light grinding and polishing jobs, has constant electronic, or variable speed control.

| Technical data |                   | Tool max.      | 115 mm |
|----------------|-------------------|----------------|--------|
| Power          | 890 Watt          | Spindle thread | M14    |
| Voltage        | 230 Volt          | Weight         | 2.0 kg |
| Speed CON      | 3,500 rpm         |                |        |
| Speed VARIO    | 1,000 - 4,000 rpm |                |        |

**Included** Rubber connecting cable 4 m, side handle, carton.

| Available versions    | Item no. | Price net. |
|-----------------------|----------|------------|
| GENIUS 900 CON 230V   | 036.028  | 279.00 €   |
| GENIUS 900 VARIO 230V | 036.026  | 289.00 €   |

### GENIUS 900 VARIO/B // Dry angle polisher

**D**


Compact dry machine for light grinding, polishing and drilling jobs, has variable speed control.

| Technical data |                   | Tool max.      | 115 mm |
|----------------|-------------------|----------------|--------|
| Power          | 890 Watt          | Spindle thread | M14    |
| Voltage        | 230 Volt          | Weight         | 2.0 kg |
| Speed          | 1,000 - 4,000 rpm |                |        |

**Included** Rubber connecting cable 4 m, bail handle, carton.

| Available versions      | Item no. | Price net. |
|-------------------------|----------|------------|
| GENIUS 900 VARIO/B 230V | 036.140  | 300.00 €   |

**GENIUS 1400 CON** // Dry angle polisher**D**

Powerful one-hand polisher with constant speed control and side handle.

|                       |         |                |                |        |
|-----------------------|---------|----------------|----------------|--------|
| <b>Technical data</b> | Power   | 1,420 Watt     | Tool max.      | 125 mm |
|                       | Voltage | 230 / 115 Volt | Spindle thread | M14    |
|                       | Speed   | 2,500 rpm      | Weight         | 2.9 kg |

**Included** Silicone connecting cable 4 m, side handle, carton.

|                           |                 |                   |
|---------------------------|-----------------|-------------------|
| <b>Available versions</b> | <b>Item no.</b> | <b>Price net.</b> |
| GENIUS 1400 CON 230V      | 003.036.051CON  | 363.00 €          |
| GENIUS 1400 CON 115V      | 003.036.052CON  | 363.00 €          |

**GENIUS 1400 CON/B** // Dry angle polisher**D**

Powerful one-hand polisher with constant speed control and bail handle.

|                       |         |                |                |        |
|-----------------------|---------|----------------|----------------|--------|
| <b>Technical data</b> | Power   | 1,420 Watt     | Tool max.      | 125 mm |
|                       | Voltage | 230 / 115 Volt | Spindle thread | M14    |
|                       | Speed   | 2,500 rpm      | Weight         | 2.7 kg |

**Included** Silicone connecting cable 4 m, bail handle, carton.

|                           |                 |                   |
|---------------------------|-----------------|-------------------|
| <b>Available versions</b> | <b>Item no.</b> | <b>Price net.</b> |
| GENIUS 1400 CON/B 230V    | 003.036.060CON  | 373.00 €          |
| GENIUS 1400 CON/B 115V    | 003.036.055CON  | 373.00 €          |

**GENIUS 1400 VARIO** // Dry angle polisher**D**

Inexpensive polisher with variable speed control and side handle.

|                       |         |                 |                |        |
|-----------------------|---------|-----------------|----------------|--------|
| <b>Technical data</b> | Power   | 1,420 Watt      | Tool max.      | 125 mm |
|                       | Voltage | 230 / 115 Volt  | Spindle thread | M14    |
|                       | Speed   | 800 - 3,400 rpm | Weight         | 2.9 kg |

**Included** Silicone connecting cable 4 m, side handle, carton.

|                           |                 |                   |
|---------------------------|-----------------|-------------------|
| <b>Available versions</b> | <b>Item no.</b> | <b>Price net.</b> |
| GENIUS 1400 VARIO 230V    | 003.036.051     | 373.00 €          |
| GENIUS 1400 VARIO 115V    | 003.036.052     | 373.00 €          |

**GENIUS 1600 VARIO** // Dry angle polisher**D**

Polisher for professional use. Powerful motor rating and spindle bearing make this machine especially suitable for continuous running.

|                       |         |                 |                |        |
|-----------------------|---------|-----------------|----------------|--------|
| <b>Technical data</b> | Power   | 1,590 Watt      | Tool max.      | 150 mm |
|                       | Voltage | 230 / 115 Volt  | Spindle thread | M14    |
|                       | Speed   | 800 - 3,600 rpm | Weight         | 2.9 kg |

**Included** Silicone connecting cable 4 m, side handle, carton.

|                                                                     |                 |                   |
|---------------------------------------------------------------------|-----------------|-------------------|
| <b>Available versions</b>                                           | <b>Item no.</b> | <b>Price net.</b> |
| GENIUS 1600 VARIO 230V                                              | 036.045         | 463.00 €          |
| GENIUS 1600 VARIO 115V                                              | 036.029         | 463.00 €          |
| GENIUS 1600 VARIO/B (with bail handle, instead of side handle) 230V | 036.118         | 473.00 €          |
| GENIUS 1600 VARIO/B (with bail handle, instead of side handle) 115V | 036.158         | 473.00 €          |

**GENIUS 1700 VARIO/B** // Dry angle polisher**D**

Dry polisher with maximum strength and reinforced spindle bearing for continuous running, ergonomic bail handle.

|                       |         |                 |                |        |
|-----------------------|---------|-----------------|----------------|--------|
| <b>Technical data</b> | Power   | 1,750 Watt      | Tool max.      | 150 mm |
|                       | Voltage | 230 / 115 Volt  | Spindle thread | M14    |
|                       | Speed   | 800 - 3,600 rpm | Weight         | 3.0 kg |

**Included** Silicone connecting cable 4 m, bail handle, carton.

|                                                                   |                 |                   |
|-------------------------------------------------------------------|-----------------|-------------------|
| <b>Available versions</b>                                         | <b>Item no.</b> | <b>Price net.</b> |
| GENIUS 1700 VARIO 230V (with side handle, instead of bail handle) | 003.036.038     | 499.00 €          |
| GENIUS 1700 VARIO/B 230V (with bail handle)                       | 003.036.044     | 509.00 €          |
| GENIUS 1700 VARIO/B 115V (with bail handle)                       | 003.036.045     | 509.00 €          |

**GENIUS 1802** // Dry angle polisher**D**

Dry polisher with maximum strength and reinforced spindle bearing for continuous running, ergonomic bail handle.

|                       |         |            |                |        |
|-----------------------|---------|------------|----------------|--------|
| <b>Technical data</b> | Power   | 1,800 Watt | Tool max.      | 180 mm |
|                       | Voltage | 230 Volt   | Spindle thread | M14    |
|                       | Speed   | 2,000 rpm  | Weight         | 4.4 kg |

**Included** Silicone connecting cable 4 m, bail handle, carton.

|                           |                 |                   |
|---------------------------|-----------------|-------------------|
| <b>Available versions</b> | <b>Item no.</b> | <b>Price net.</b> |
| GENIUS 1802 230V          | 003.036.054     | 619.00 €          |

## Very strong - even at low speeds!

### GALESKI POLIFOX - 900 / 1400 / 1502 / 1700 / 1802 machines

- Robust wet polisher with lots of power.
- Motor is dust and splash protected, guaranteeing a long life.
- Our top of the range POLIFOX 1700 and POLIFOX 1802 machines were designed for constant hard work. Unique: reinforced with double ball bearing, positioned near the tool on the spindle (good leverage).
- Ergonomic design for comfortable work.
- Electronic speed control with soft start, overload protection, and no load speed limitation.
- Spindle lock for tool-free disc change.

#### Well-Built:

Bail handle and ergonomic rear handle for safe and comfortable work.

#### Quality down to the details:

- service port to easily exchange the brushes.
- speed control while polishing.

Shown without splash guard

Use just the right amount of water with the finely-regulated water feeding



#### POLIFOX 900 / 1400 / 1502 Rinsing head spindle bearing:

GALESKI Quality:

Spindle mounting in rinsing head, with water sealing underneath.

#### Polifox 1700 / 1800 Rinsing head spindle bearing

GALESKI Special Quality for maximum load:

1. Double bearing spindle mounting in rinsing head.
2. The water seals were moved up. This results in the bearings being closer to the tool and lower lever forces being applied to the bearing, spindle, and sealing rings.

All machines are supplied with a practical and flexible splash guard. The advantage: less moisture and dirt in the machine.



## POLIFOX 900 CON // Wet polisher

W



Shown without splash guard

Compact and easy to handle for light polishing jobs, has constant electronic speed control.

### Technical data

|                |           |
|----------------|-----------|
| Power          | 890 Watt  |
| Voltage        | 230 Volt  |
| Speed          | 3,400 rpm |
| Tool max.      | 100 mm    |
| Spindle thread | M14       |
| Weight         | 2.3 kg    |

### Included

Rubber connecting cable 4 m, hose 2.5 m with brass quick coupling, bail handle, personal protection switch PRCD or CEE-plug, splash guard, carton.

### Available versions

POLIFOX 900 CON DI 230V (with PRCD)  
POLIFOX 900 CON CEE 230V (for transformer)

### Item no.

004.003.121  
004.003.122

### Price net.

466.00 €  
426.00 €

## POLIFOX 900 VARIO // Wet polisher

W



Shown without splash guard

Compact and easy to handle for light polishing jobs, has variable speed regulation.

### Technical data

|                |                 |
|----------------|-----------------|
| Power          | 890 Watt        |
| Voltage        | 230 Volt        |
| Speed          | 800 - 3,600 rpm |
| Tool max.      | 100 mm          |
| Spindle thread | M14             |
| Weight         | 2.3 kg          |

### Included

Rubber connecting cable 4 m, hose 2.5 m with brass quick coupling, bail handle, personal protection switch PRCD or CEE-plug, splash guard, carton.

### Available versions

POLIFOX 900 VARIO DI 230V (with PRCD)  
POLIFOX 900 VARIO CEE 230V (for transformer)

### Item no.

003.121  
003.122

### Price net.

476.00 €  
436.00 €

## POLIFOX 1400 CON // Wet polisher

W



Shown without splash guard

Powerful one-hand polisher with constant electronic speed control.

### Technical data

|                |            |
|----------------|------------|
| Power          | 1,400 Watt |
| Voltage        | 230 Volt   |
| Speed          | 2,500 rpm  |
| Tool max.      | 100 mm     |
| Spindle thread | M14        |
| Weight         | 2.9 kg     |

### Included

Silicone connecting cable 4 m, hose 2.5 m with brass quick coupling, bail handle, personal protection switch PRCD or CEE-plug, splash guard, carton.

### Available versions

POLIFOX 1400 CON DI 230V (with PRCD)  
POLIFOX 1400 CON CEE 230V (for transformer)  
POLIFOX 1400 CON DI 115V (with PRCD)  
POLIFOX 1400 CON CEE 115V (for transformer)

### Item no.

004.003.132CON  
004.003.133CON  
004.003.134CON  
004.003.135CON

### Price net.

519.00 €  
479.00 €  
519.00 €  
479.00 €

## POLIFOX 1400 VARIO // Wet polisher

W



Shown without splash guard

Ideal starter machine - inexpensive, has variable speed regulation.

### Technical data

|                |                     |
|----------------|---------------------|
| Power          | 1,400 Watt          |
| Voltage        | 230 Volt / 115 Volt |
| Speed          | 900 - 3,400 rpm     |
| Tool max.      | 100 mm              |
| Spindle thread | M14                 |
| Weight         | 2.9 kg              |

### Included

Silicone connecting cable 4 m, hose 2.5 m with brass quick coupling, bail handle, personal protection switch PRCD or CEE-plug, splash guard, carton.

### Available versions

POLIFOX 1400 VARIO DI 230V (with PRCD)  
POLIFOX 1400 VARIO CEE 230V (for transformer)  
POLIFOX 1400 VARIO DI 115V (with PRCD)  
POLIFOX 1400 VARIO CEE 115V (for transformer)

### Item no.

004.003.132  
004.003.133  
004.003.134  
004.003.135

### Price net.

529.00 €  
489.00 €  
529.00 €  
489.00 €

## POLIFOX 1502 VARIO // Wet polisher

W



Shown without splash guard

Powerful mid-range angle polisher with lots of power reserves even at low speed.

### Technical data

|                |                 |
|----------------|-----------------|
| Power          | 1,560 Watt      |
| Voltage        | 230 / 115 Volt  |
| Speed          | 800 - 3,400 rpm |
| Tool max.      | 125 mm          |
| Spindle thread | M14             |
| Weight         | 3.1 kg          |

### Included

Silicone connecting cable 4 m, hose 2.5 m with brass quick coupling, bail handle, personal protection switch PRCD or CEE-plug, splash guard, carton.

### Available versions

POLIFOX 1502 VARIO DI 230V (with PRCD)  
POLIFOX 1502 VARIO CEE 230V (for transformer)  
POLIFOX 1502 VARIO DI 115V (with PRCD)  
POLIFOX 1502 VARIO CEE 115V (for transformer)

### Item no.

004.003.100  
004.003.101  
004.003.102  
004.003.103

### Price net.

599.00 €  
559.00 €  
599.00 €  
559.00 €

## POLIFOX 1700 VARIO // Wet polisher

W



Shown without splash guard

Strongest motor in the compact rear-handle segment - extremely powerful even at low speed.

### Technical data

|                |                 |
|----------------|-----------------|
| Power          | 1,750 Watt      |
| Voltage        | 230 / 115 Volt  |
| Speed          | 800 - 3,600 rpm |
| Tool max.      | 125 mm          |
| Spindle thread | M14             |
| Weight         | 3.5 kg          |

### Included

Silicone connecting cable 4 m, hose 2.5 m with brass quick coupling, bail handle, personal protection switch PRCD or CEE-plug, splash guard, carton.

### Available versions

POLIFOX 1700 VARIO DI 230V (with PRCD)  
POLIFOX 1700 VARIO CEE 230V (for transformer)  
POLIFOX 1700 VARIO DI 115V (with PRCD)  
POLIFOX 1700 VARIO CEE 115V (for transformer)

### Item no.

004.003.150  
004.003.151  
004.003.152  
004.003.153

### Price net.

699.00 €  
659.00 €  
699.00 €  
659.00 €

## POLIFOX 1802 CON // Wet polisher

W



Shown without splash guard

Heavy duty rear-handle polisher with maximum power for long-term grinding work.

### Technical data

|                |            |
|----------------|------------|
| Power          | 1,800 Watt |
| Voltage        | 230 Volt   |
| Speed          | 2,000 rpm  |
| Tool max.      | 125 mm     |
| Spindle thread | M14        |
| Weight         | 4.8 kg     |

### Included

Silicone connecting cable 4 m, hose 2.5 m with brass quick coupling, bail handle, personal protection switch PRCD or CEE-plug, splash guard, carton.

### Available versions

POLIFOX 1802 CON DI 230V (with PRCD)  
POLIFOX 1802 CON CEE 230V (for transformer)

### Item no.

004.003.160  
004.003.161

### Price net.

829.00 €  
789.00 €

## Reliable and versatile wet hybrid machines!

### GALESKI JOKER - SPEED / MAXI 2 / EASY

- infinitely variable speed control
- constant electronic with soft start for constant speed even under load
- thermal overload protection
- spindle lock for easy disc change
- ergonomic design to reduce work fatigue

- MILLING
- GRINDING
- DRILLING

... with one machine!



### GALESKI JOKER EASY

#### MILLING, GRINDING, DRILLING - DRY + WET

... work with water feeding / work without water - JOKER EASY CAN DO BOTH!

Simply change the machine head and you're ready to work - wherever, whatever - with one machine.



Rinsing head 1 makes JOKER EASY a wet machine.

>>>



Head 2 makes JOKER EASY a dry machine.

<<<



**MILLING**

6.000 - 7.000 rpm.

**DRILLING**

3.000 - 10.000 rpm.

**GRINDING and POLISHING**

2.000 - 4.000 rpm.

**JOKER SPEED VARIO // Drill, grinder and polisher****W**Shown without  
splash guard

Ideal for drilling at high speed (diamond drill bits) and light polishing jobs.

**Technical data**

|                      |                   |
|----------------------|-------------------|
| Power                | 1,550 Watt        |
| Voltage              | 230 Volt          |
| Speed                | 2,700 - 9,500 rpm |
| Drill Ø max.         | 20 mm             |
| Grinding tool Ø max. | 100 mm            |
| Spindle thread       | M14               |
| Weight               | 3.5 kg            |

**Included**

Silicone connecting cable 4 m, hose 2.5 m with brass quick coupling, bail handle, personal protection switch PRCD or CEE-plug, splash guard, carton.

**Available versions**JOKER SPEED VARIO DI 230V (with PRCD)  
JOKER SPEED VARIO CEE 230V (for transformer)**Item no.**001.003.017  
001.003.015**Price net.**633.00 €  
593.00 €**JOKER MAXI/2 VARIO // Drill, grinder and polisher****W**Shown without  
splash guard

Powerful for long-term use at low speeds.

**Technical data**

|                      |                   |
|----------------------|-------------------|
| Power                | 1,750 Watt        |
| Voltage              | 230 / 115 Volt    |
| Speed                | 1,700 - 6,800 rpm |
| Drill Ø max.         | 50 mm             |
| Grinding tool Ø max. | 125 mm            |
| Spindle thread       | M14               |
| Weight               | 3.5 kg            |

**Included**

Silicone connecting cable 4 m, hose 2.5 m with brass quick coupling, bail handle, personal protection switch PRCD or CEE-plug, splash guard, carton.

**Available versions**JOKER MAXI/2 VARIO DI 230V (with PRCD)  
JOKER MAXI/2 VARIO CEE 230V (for transformer)  
JOKER MAXI/2 VARIO DI 115V (with PRCD)  
JOKER MAXI/2 VARIO CEE 115V (for transformer)**Item no.**001.003.035  
001.003.034  
001.003.029  
001.003.036**Price net.**649.00 €  
609.00 €  
649.00 €  
609.00 €**JOKER EASY VARIO // Drill, grinder and polisher****D W**Illustration with  
rinsing head 1Shown without  
splash guard

Illustration with head 2

Work with or without water feeding – just switch heads and you're ready for all types of work.

**Technical data**

|                      |                 |
|----------------------|-----------------|
| Power                | 1,550 Watt      |
| Voltage              | 230 / 115 Volt  |
| Speed                | 800 - 3,600 rpm |
| Drill Ø max.         | 35 mm           |
| Grinding tool Ø max. | 100 mm          |
| Spindle thread       | M14             |
| Weight               | 2.9 kg          |

**Included**

Silicone connecting cable 4 m, 1 x machine head for wet use, hose 2.5 m with brass quick coupling, 1 x machine head for dry use, bail handle, personal protection switch PRCD or CEE-plug, splash guard, carton.

**Available versions**JOKER EASY VARIO DI 230V (with PRCD)  
JOKER EASY VARIO CEE 230V (for transformer)  
JOKER EASY VARIO DI 115V (with PRCD)  
JOKER EASY VARIO CEE 115V (for transformer)**Item no.**001.003.037  
001.003.043  
001.003.038  
001.003.042**Price net.**675.00 €  
635.00 €  
675.00 €  
635.00 €

## Excellent for long-term floor polishing !

### GALESKI TORNADO 125 - SPEED / MAXI / ULTRA

- Powerful motor with lots of power reserves for dry grinding
- Unique: ideal dust extraction due to extraction hood with spring-loaded brush ring
- Safe front opening for grinding close to walls
- Has an autobalancer (TORNADO 125 ULTRA/MAXI)

#### Swivel Joint:

Dust extractor is rotatable, so no twisted hoses and no constraints.

#### Hose Holder, Distance Piece, and Connector:

The hose is always at a set distance from the machine and is connected at the rear of the machine, so it will not be in the way.

#### Spring-loaded brush ring:

To keep dust down as low as possible, the extraction hood has a spring-loaded brush ring. The brush ring is pressed against the surface being ground with consistently light spring pressure. Uneven surfaces and tool wear are compensated for and the extraction hood sits exactly on the grinding surface.

#### Front opening for working close to walls:

For low dust work close to walls, the front opening on the extraction hood can be folded up.



Robust suction hood with stainless steel inserts, for working close to the wall.



#### AUTOBALANCER

The autobalancer consists of steel balls, lubricated in oil, that freely move around the drive shaft in a housing similar to that for ball bearings, and so perfectly level out any imbalance.

## ECO-LINE

### TORNADO 125 SPEED ECO CON // Dry grinder

D



Inexpensive floor grinder with protective hood for brush ring Ø 125 mm and constant electronic speed control. With connector to vacuum cleaner. Foldable front flap.

#### Technical data

|                |            |
|----------------|------------|
| Power          | 1,500 Watt |
| Voltage        | 230 Volt   |
| Speed          | 9,500 rpm  |
| Tool max.      | 125 mm     |
| Spindle thread | M14        |
| Weight         | 3.9 kg     |

#### Included

Silicone connecting cable 4 m, bail handle, flange, flange nut, brush ring protective hood, carton.

#### Available versions

TORNADO 125 SPEED ECO CON

#### Item no.

003.036.135CON

#### Price net.

540.00 €

### TORNADO 125 MAXI ECO // Dry grinder

D



Inexpensive floor grinder with bail handle. Variable speed range for high power at low speeds. Connector to vacuum cleaner.

#### Technical data

|                |                   |
|----------------|-------------------|
| Power          | 1,750 Watt        |
| Voltage        | 230 / 115 Volt    |
| Speed          | 1,700 - 6,800 rpm |
| Tool max.      | 125 mm            |
| Spindle thread | M14               |
| Weight         | 3.8 kg            |

#### Included

Silicone connecting cable 4 m, bail handle, flange, flange nut, brush ring protective hood, carton.

#### Available versions

TORNADO 125 MAXI ECO 230V  
TORNADO 125 MAXI ECO 115V

#### Item no.

003.036.137  
003.036.138

#### Price net.

570.00 €  
570.00 €



## PROFI-LINE

### TORNADO 125 SPEED/2 // Dry grinder

D



Professional machine for beginners with spring-loaded brush ring. Foldable front flap and constant electronic speed control.

#### Technical data

|                |                |
|----------------|----------------|
| Power          | 1,500 Watt     |
| Voltage        | 230 / 115 Volt |
| Speed          | 9,500 rpm      |
| Tool max.      | 125 mm         |
| Spindle thread | M14            |
| Weight         | 4.5 kg         |

#### Included

Silicone connecting cable 4 m, flange, twin hole wrench, flange nut, side handle, carton.

#### Available versions

TORNADO 125 SPEED/2 230V

#### Item no.

003.036.120

#### Price net.

798.00 €

### TORNADO 125 ULTRA/2 // Dry grinder

D



Powerful motor with high quality gear unit for hard continuous use. Ergonomic bail handle and autobalancer reduce work fatigue.

#### Technical data

|                |                 |
|----------------|-----------------|
| Power          | 1,750 Watt      |
| Voltage        | 230 / 115 Volt  |
| Speed          | 800 - 3,600 rpm |
| Tool max.      | 125 mm          |
| Spindle thread | M14             |
| Weight         | 4.5 kg          |

#### Included

Silicone connecting cable 4 m, bail handle, autobalancer, twin hole wrench, flange nut, hose connector, hose adapter 40 cm long, spring loaded brush ring with foldable front flap, case.

#### Available versions

TORNADO 125 ULTRA/2 230V  
TORNADO 125 ULTRA/2 115V

#### Item no.

003.036.125  
003.036.131

#### Price net.

930.00 €  
930.00 €

### TORNADO 125 MAXI/2 // Dry grinder

D



Powerful motor and high quality gear unit for hard continuous use at low speed. Ergonomic bail handle and autobalancer reduce work fatigue.

#### Technical data

|                |                   |
|----------------|-------------------|
| Power          | 1,750 Watt        |
| Voltage        | 230 / 115 Volt    |
| Speed          | 1,700 - 6,800 rpm |
| Tool max.      | 125 mm            |
| Spindle thread | M14               |
| Weight         | 4.5 kg            |

#### Included

Silicone connecting cable 4 m, bail handle, autobalancer, twin hole wrench, flange nut, hose connector, hose adapter 40 cm long, spring loaded brush ring with foldable front flap, case.

#### Available versions

TORNADO 125 MAXI/2 230V  
TORNADO 125 MAXI/2 115V

#### Item no.

003.036.123  
003.036.129


#### Price net.

930.00 €  
930.00 €

# AIR IS MORE THAN NOTHING!

GALESKI

**AIR GENIUS  
AIR POLIFOX  
AIR JOKER  
AIR ECOMAX  
AIR ATLAS**

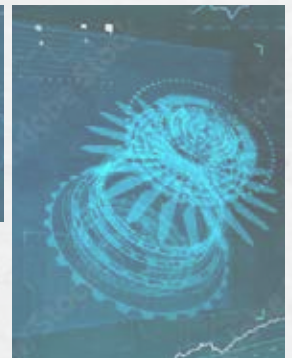

- Air is - outstanding performance
- Air is - safe wet work, without electricity
- Air is - mature technology

**GALESKI-AIR with new machining options on page 17 and 18!**



## Advice from the experts!

The quality and the amount of air supplied has a direct effect on the reliability and the power of all pneumatic polishers. If the quality of the air provided does not meet the required standards, the machine cannot give full power.

Air quality criteria for our power machines:

- correct operating pressure (6 bar)
- adequate preparation capacity of the air (1200 L/min. for each connected AIR machine)
- oil mist with exact dispersion (max. 5 drops per m<sup>3</sup> air/min.)
- dry air (using water separator)
- pure filtered air (perhaps by fitting an additional fine filter)

**We will be happy to advise you. Tel: +49 2663 9437 0 or E-Mail: [info@galeski.de](mailto:info@galeski.de)**

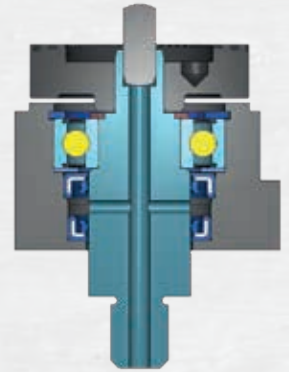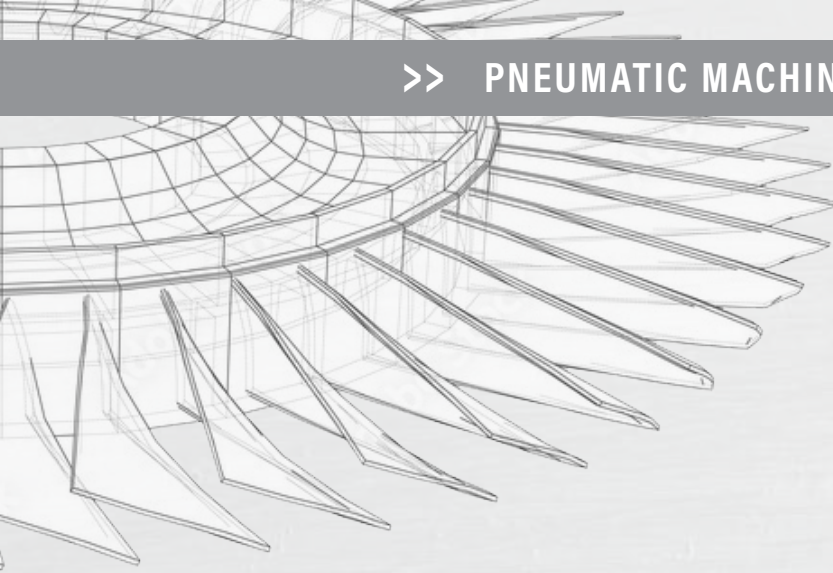

● **Air Genius 800 / 902 and  
Air Polifox 800 / 902**  
**Rinsing head spindle bearing:**

GALESKI Quality

Spindle mounting in rinsing head,  
with water sealing underneath.

## Dry air polisher

**GALESKI AIR GENIUS - 800 / 902**

## Wet air polisher

**GALESKI AIR POLIFOX -  
800 / 902 / 1002**

A new generation of pneumatic polishers with an excellent ratio of size to power! Both AIR GENIUS and AIR POLIFOX are extra powerful and extra compact!


- great for precision work
- full power for rough work
- robust, yet compact
- comfortable and safe work
- perfected silencer technology
- air return to the rear



● **Air Polifox 1002**  
**Rinsing head spindle bearing**

GALESKI Special Quality  
for maximum load:

1. Double bearing spindle mounting in rinsing head.
2. The water seals were moved up. This results in the bearings being closer to the tool and lower lever forces being applied to the bearing, spindle, and sealing rings.

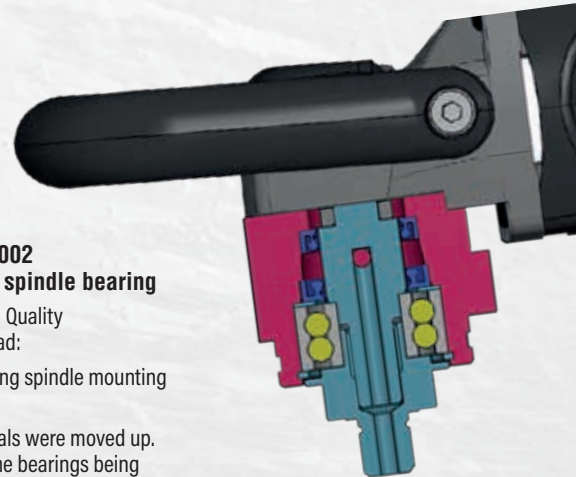

**AIR GENIUS 800 // Dry air grinder**
**D**


With the highest speed in its series, this pneumatic polisher is suitable for resin dry pads and diamond grinders up to Ø 100 mm.

| Technical data       |           | Included                                                                    |
|----------------------|-----------|-----------------------------------------------------------------------------|
| Power output         | 800 Watt  | Air hose 3 m, inner Ø 9 mm, compressed air connection, bail handle, carton. |
| Air consumption max. | 20 L/sec  |                                                                             |
| Speed                | 3,400 rpm |                                                                             |
| Tool max.            | 100 mm    |                                                                             |
| Spindle thread       | M14       |                                                                             |
| Weight               | 2.5 kg    |                                                                             |
| Available versions   |           | Item no.                                                                    |
| AIR GENIUS 800       |           | 005.100.003                                                                 |
|                      |           | Price net.                                                                  |
|                      |           | 869.00 €                                                                    |

**AIR POLIFOX 800 // Wet air grinder**
**D**


With the highest speed in its series, this pneumatic polisher is suitable for resin wet pads up to Ø 100 mm.

| Technical data       |           | Included                                                                                                    |
|----------------------|-----------|-------------------------------------------------------------------------------------------------------------|
| Power output         | 800 Watt  | Air hose 3 m, inner Ø 9 mm, Water control valve, hose 2.5 m with brass quick coupling, bail handle, carton. |
| Air consumption max. | 20 L/sec  |                                                                                                             |
| Speed                | 3,400 rpm |                                                                                                             |
| Tool max.            | 100 mm    |                                                                                                             |
| Spindle thread       | M14       |                                                                                                             |
| Weight               | 3.2 kg    |                                                                                                             |
| Available versions   |           | Item no.                                                                                                    |
| AIR POLIFOX 800      |           | 005.200.004                                                                                                 |
|                      |           | Price net.                                                                                                  |
|                      |           | 998.00 €                                                                                                    |

**AIR GENIUS 902 // Dry air grinder**
**D**


Its powerful motor and reinforced spindle bearings make this polisher suitable for heavy continuous loads.

| Technical data       |           | Included                                                                    |
|----------------------|-----------|-----------------------------------------------------------------------------|
| Power output         | 900 Watt  | Air hose 3 m, inner Ø 9 mm, compressed air connection, bail handle, carton. |
| Air consumption max. | 20 L/sec  |                                                                             |
| Speed                | 2,000 rpm |                                                                             |
| Tool max.            | 130 mm    |                                                                             |
| Spindle thread       | M14       |                                                                             |
| Weight               | 2.5 kg    |                                                                             |
| Available versions   |           | Item no.                                                                    |
| AIR GENIUS 902       |           | 005.100.004                                                                 |
|                      |           | Price net.                                                                  |
|                      |           | 949.00 €                                                                    |

**AIR POLIFOX 902 // Wet air grinder**
**W**


This extremely powerful polisher is suitable for wet grinding and polishing tools up to Ø 130 mm.

| Technical data       |           | Included                                                                                                    |
|----------------------|-----------|-------------------------------------------------------------------------------------------------------------|
| Power output         | 900 Watt  | Air hose 3 m, inner Ø 9 mm, Water control valve, hose 2.5 m with brass quick coupling, bail handle, carton. |
| Air consumption max. | 20 L/sec  |                                                                                                             |
| Speed                | 2,000 rpm |                                                                                                             |
| Tool max.            | 130 mm    |                                                                                                             |
| Spindle thread       | M14       |                                                                                                             |
| Weight               | 3.2 kg    |                                                                                                             |
| Available versions   |           | Item no.                                                                                                    |
| AIR POLIFOX 902      |           | 005.200.009                                                                                                 |
|                      |           | Price net.                                                                                                  |
|                      |           | 1069.00 €                                                                                                   |

**AIR JOKER MAXI // Drill and grinder**
**W**


More powerful wet angle grinder for drilling and grinding work with reinforced double-row spindle bearings for powerful performance..

| Technical data       |           | Included                                                                                                    |
|----------------------|-----------|-------------------------------------------------------------------------------------------------------------|
| Power output         | 950 Watt  | Air hose 3 m, inner Ø 9 mm, water control valve, hose 2.5 m with brass quick coupling, bail handle, carton. |
| Air consumption max. | 20 L/sec  |                                                                                                             |
| Speed                | 5,400 rpm |                                                                                                             |
| Tool max.            | 125 mm    |                                                                                                             |
| Spindle thread       | M14       |                                                                                                             |
| Weight               | 3.3 kg    |                                                                                                             |
| Available versions   |           | Item no.                                                                                                    |
| AIR JOKER MAXI       |           | 005.200.013                                                                                                 |
|                      |           | Price net.                                                                                                  |
|                      |           | 1,139.00 €                                                                                                  |

**AIR POLIFOX 1002 // Wet air grinder**
**W**


Strongest wet polisher in this range of pneumatic tools. Its powerful double-row spindle bearing makes it perfect for continuous running.

| Technical data       |           | Included                                                                                                    |
|----------------------|-----------|-------------------------------------------------------------------------------------------------------------|
| Power output         | 950 Watt  | Air hose 3 m, inner Ø 9 mm, water control valve, hose 2.5 m with brass quick coupling, bail handle, carton. |
| Air consumption max. | 20 L/sec  |                                                                                                             |
| Speed                | 2,000 rpm |                                                                                                             |
| Tool max.            | 150 mm    |                                                                                                             |
| Spindle thread       | M14       |                                                                                                             |
| Weight               | 3.3 kg    |                                                                                                             |
| Available versions   |           | Item no.                                                                                                    |
| AIR POLIFOX 1002     |           | 005.200.007                                                                                                 |
|                      |           | Price net.                                                                                                  |
|                      |           | 1,139.00 €                                                                                                  |

**AIR GENIUS AND AIR POLIFOX ACCESSORIES**

| Designation                        | Description                                                                                                 | Item No.    | Price € |
|------------------------------------|-------------------------------------------------------------------------------------------------------------|-------------|---------|
| Air service unit                   | 2-piece, consisting of filter controller and air line lubricator, flow rate 1,830 L/min., connection 1/2"   | 060.000.001 | 223.00  |
| Lubricator, dispersion as oil mist | With needle valve oil dosage. Flow rate 4,330 L/min., connection 1/2"                                       | 060.000.002 | 100.00  |
| Air hose, PVC with canvas          | With coupling and plug-in nozzle. color: transparent, operating pressure: 20 bar, inner Ø 9 mm, length 5 m  | 060.000.003 | 25.00   |
| Air hose, PVC with canvas          | With coupling and plug-in nozzle. color: transparent, operating pressure: 20 bar, inner Ø 9 mm, length 10 m | 060.000.004 | 69.00   |
| Special pneumatic oil, 1 litre     | For use in pneumatic lubricators and air service units for pneumatic tools and plants.                      | 060.000.005 | 29.60   |

## Air-Cutter, dry GALESKI AIR GENIUS MAXI

## Air-Cutter, dry and wet GALESKI AIR ECOMAX 125

## Air-Drum milling cutter, dry GALESKI AIR ATLAS MAX

**New possibilities!**

A new generation of pneumatic machines with an excellent ratio of size to power!  
AIR GENIUS MAXI as well as AIR ECOMAX and AIR ATLAS MAX are EXTRA STRONG and SUPER HANDY!

- great for precision work
- full power for rough work
- robust, yet compact
- comfortable and safe work
- perfected silencer technology
- air return to the rear

Cutting, dry  
AIR GENIUS MAXI



Cutting, dry and wet  
AIR ECOMAX 125



For more details on how the machine works, see page 36

Technical data see next page >>

Drum milling cutter, dry  
AIR ATLAS MAX

For more details on how the machine works, see page 56



**AIR GENIUS MAXI // Air-cutter, dry**
**D**


With the highest speed of the "AIR" series and at the same time high torque, this air machine is particularly suitable for dry cutting work with cut-off wheels up to Ø 125 mm.

**Technical data**

|                      |           |
|----------------------|-----------|
| Power output         | 900 Watt  |
| Air consumption max. | 20 L/sec  |
| Speed                | 5,400 rpm |
| Tool max.            | 125 mm    |
| Spindle thread       | M14       |
| Weight               | 3.3 kg    |

**Included**

Air hose 3 m - inner Ø 9 mm with brass quick coupling, side handle, carton

Available versions  
AIR GENIUS MAXI

Item no.  
005.100.006

Price net.  
1,049.00 €

**AIR ECOMAX 125 // Air-Cutter, dry and wet**
**W D**


For more details on how the machine works, see page 36

With the highest speed of the "AIR" series and at the same time high torque, this air machine is particularly suitable for dry and wet cutting work with cut-off wheels up to Ø 125 mm.

**Technical data**

|                      |           |
|----------------------|-----------|
| Power output         | 900 Watt  |
| Air consumption max. | 20 L/sec  |
| Speed                | 5,400 rpm |
| Tool max.            | 125 mm    |
| Spindle thread       | M14       |
| Weight               | 3.3 kg    |

**Included**

Air hose 3 m - inner Ø 9 mm with brass quick coupling, Water hose 2.5 m with brass quick coupling, Water control valve, jointed coolant hose, adjustable safety cover with removable front cover, Flange and flange nut, twin hole wrench, side handle, carton.

Available versions  
AIR ECOMAX 125

Item no.  
005.100.007

Price net.  
1,139.00 €

**AIR ATLAS PRO/MAX // Air-drum milling cutter, dry**
**D**

For more details on how the machine works, see page 56



Pneumatic drum cutter with increased speed and strong torque, is suitable for dry milling work. Due to its design, it works, in conjunction with a vacuum cleaner, very low dust. Adjustable position of the adjustable position of the machine body in relation to the milling drum (up to 150°) for working close to the wall/floor (ATLAS MAX only).

Image: AIR ATLAS MAX

**Technical data**

|                      |           |                    |        |
|----------------------|-----------|--------------------|--------|
| Power output         | 900 Watt  | Working width max. | 82 mm  |
| Air consumption max. | 20 L/sec  | Tool Ø max.        | 98 mm  |
| Speed                | 5,400 rpm | Spindle thread     | M14    |
| Working depth        | 0 - 10 mm | Weight             | 3.2 kg |

**Included**

Air hose 3 m - inner Ø 9 mm with brass quick coupling, protection hood with dust extraction hose, connector to vacuum cleaner, twin hole wrench, flange nut with locking screw, 6 mm allen wrench, bail handle, carton.

**Available versions**

AIR ATLAS PRO (without adjustable position of the machine body)  
AIR ATLAS MAX (with adjustable position of the machine body)


Item no.  
003.036.811  
003.036.809

Price net.  
2,423.00 €  
2,766.00 €

## A comfortable and manageable machine

### GALESKI BEAVER-180/2 VARIO

- Always good to hold thanks to the Multiple Choice bail handle. For your way of working - 4 different setting positions.

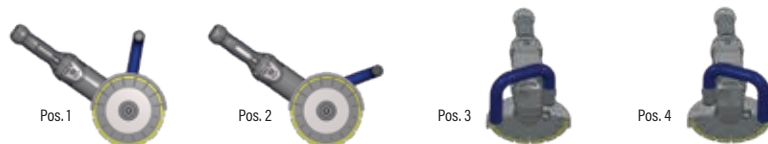

Use the BEAVER 180/2 instead of having to use a much heavier machine.



## All the power you need for dry cuts


### GALESKI BEAVER-230/3 CON

- Diamond cutting discs up to Ø 230 mm - cutting depth to 63 mm.

The BEAVER 230/3 is a heavy duty cutter with 2400 watt power. With low vibration switch handle and bow handle.



Rotating switch handle adjustable in 7 positions.

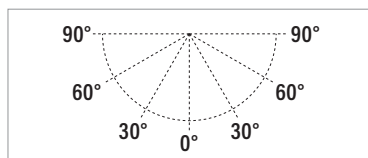

- Ideally balanced machine.

- Handle is directly above the center of work.

You'll still feel relaxed even when working hard with the machine.



#### BEAVER 180/2 // Dry cutter

**D**

##### Technical data

|                    |                   |
|--------------------|-------------------|
| Power              | 1,750 Watt        |
| Voltage            | 230 / 115 Volt    |
| Speed              | 2.000 - 7.000 rpm |
| Tool max.          | 180 mm            |
| Cutting depth max. | 58 mm             |
| Weight             | 3.7 kg            |

##### Included

Silicone connecting cable 4 m, flange, FIXTEC flange nut, protective hood, allen wrench, anti vibration "multiple choice" handle, carton.

Available versions  
BEAVER 180/2, 230V  
BEAVER 180/2, 115V

Item no.  
006.000.112  
006.000.113

Price net.  
446.00 €  
443.00 €

#### BEAVER 230/3 // Dry cutter

**D**

##### Technical data

|                    |            |
|--------------------|------------|
| Power              | 2,400 Watt |
| Voltage            | 230 Volt   |
| Speed              | 6,600 rpm  |
| Tool max.          | 230 mm     |
| Cutting depth max. | 65 mm      |
| Weight             | 6.1 kg     |

##### Included

Silicone connecting cable 4 m, flange, FIXTEC flange nut, protective hood, allen wrench, anti vibration handles, rotating switch handle, carton.

Available versions  
BEAVER 230/3, 230V

Item no.  
006.000.123

Price net.  
469.00 €

## Low dust cutting without a vacuum cleaner!

### GALESKI TURBOCUT 160 DCS

- New - integrated dust extraction.
- With guide plate (depth of cut adjustment, cut marker, magnetic felt coating).
- Can be used with GALESKI rail system.

#### DUST CONTROL SYSTEM

DCS World Patent

Work at low dust levels using the Dust Control System, without expensive additional equipment. DCS stands for integrated dust extraction, resulting in quick and comfortable handling. A vacuum cleaner is not necessary - attach the filter sack provided to the machine and you can start work right away.

Not like this



... like this!



• **A powerful exhaust fan** is positioned on the side of the motor and is run by a drive belt.

• **Hose and filter sack:** ... with the machine in the case, quickly ready for use.



• **With the GALESKI rail system:** Cut precisely on smooth and rough surfaces.



#### D TURBOCUT 160 DCS // Dry stone cutter



Powerful, innovative stone cutter with integrated dust extraction for low-dust work without the need of an additional vacuum cleaner.

##### Technical data

|                    |                   |
|--------------------|-------------------|
| Power              | 1,750 Watt        |
| Voltage            | 230 / 115 Volt    |
| Speed              | 1,700 - 6,800 rpm |
| Tool max.          | 160 mm            |
| Cutting depth max. | 40 mm             |
| Weight             | 5.0 kg            |

##### Included

Silicone connecting cable 4 m, Filter bag, 2 m hose with non-return valve, Velcro tape, removable magnetic felt, case.

##### Available versions

|                       |
|-----------------------|
| TURBOCUT 160 DCS 230V |
| TURBOCUT 160 DCS 115V |

|             |
|-------------|
| Item no.    |
| 006.036.091 |
| 006.036.096 |

|            |
|------------|
| Price net. |
| 1,142.00 € |
| 1,142.00 € |

WITTY  
VERSATILE  
PRUDENT  
IMAGINATIVE  
SHARP  
ENTERPRISING  
AGILE  
BRIGHT  
ASTUTE  
CLEVER  
SAVVY  
RESOURCEFUL

**GALESKI**  
MANUFAKTUR INNOVATIVER MASCHINEN

# smart

For more fun at work!



Power cutter with  
suction connection

GALESKI  
**SMART CUTTER 1700**  
**PLUS**

## Freehand Stone Cutter - Low-Dust, Easy to Handle, Light!

### GALESKI SMART CUTTER 1500 ECO

- Compact one-handed stone cutter for the pulling cut, with extraction hose and vacuum cleaner connection.
- Light and easy to handle. Despite extraction hose, suitable for one-handed use.
- Clear view to cutting area.

#### Guard with open design:

As well as ensuring a clear view of the cutting area, the guard and suction nozzle provide excellent dust extraction.



#### Swivel Joint:

Dust extractor is rotatable, so no twisted hoses and no constraints.

#### Hose Holder, Distance Piece, and Connector:

The hose is always at a set distance from the machine and is connected at the rear of the machine, so it will not be in the way.

#### Using the Guide Edge!

To make a right-angled cut, place the bottom edge of the suction nozzle (guide edge) on the stone, set the running disc into the stone (using a tilting motion over the guide edge), and following the guide edge, make the cut.



#### SMART CUTTER 1500 VARIO ECO // Dry stone cutter

**D**



Powerful stone cutter for the pulling cut, with guard and vacuum cleaner connection.

##### Technical data

|                    |                   |
|--------------------|-------------------|
| Power              | 1,520 Watt        |
| Voltage            | 230 Volt          |
| Speed              | 2,700 - 9,500 rpm |
| Tool max.          | 125 mm            |
| Cutting depth max. | 25 mm             |
| Weight             | 3.3 kg            |

##### Included

Silicone connecting cable 4 m, vacuum cleaner connection, rotatable Ø 36-40 mm, flange, flange nut, twin hole wrench, ball handle, carton.

Available versions  
SMART CUTTER 1500 VARIO ECO, 230 V

Item no.  
003.036.611

Price net.  
506.00 €

#### SMART CUTTER 1500 VARIO PLUS // Dry stone cutter

**D**



Powerful stone cutter for the pulling cut, with guard and vacuum cleaner connection. The guide is removable, making the machine much more versatile.

##### Technical data

|                    |                   |
|--------------------|-------------------|
| Power              | 1,520 Watt        |
| Voltage            | 230 Volt          |
| Speed              | 2,700 - 9,500 rpm |
| Tool max.          | 125 mm            |
| Cutting depth max. | 25 mm             |
| Weight             | 3.9 kg            |

##### Included

Silicone connecting cable 4 m, vacuum cleaner connection, rotatable Ø 36-40 mm, removable guide plate with connection to guide rail, stopper plate, plastic coating with velcro, flange, FIXTEC flange nut, ball handle, case.

Available versions  
SMART CUTTER 1500 VARIO PLUS, 230 V

Item no.  
003.036.612

Price net.  
658.00 €

## ... more versatility with the guide plate!

### GALESKI SMART CUTTER 1500 PLUS / 1700 PLUS

- The SMART CUTTER is even more versatile with the guide plate:
  - using the depth of cut adjustment enables precision.
  - guide plate can be used with the GALESKI rail system (see Accessories, page 42).
  - an adjustable stopper is perfect for cutting strips of tile or stone.
- The guide plate can easily be removed for freehand cuts.
- Quick and easy disc change without tools due to FIXTEC system.



The guide plate can easily be removed for freehand cutting.

#### ■ Removable guide plate with felt coating:

In addition to the many applications of the ECO version, the PLUS has a removable guide plate for even more versatility.



#### Application 1:

- freehand cut without guide plate
- right-angle cut in stone (pivot in with the guide plate)
- pulling cut
- with dust extraction.



#### Application 2:

- with guide plate
- depth of cut adjustment is variable
- pulling cut
- with dust extraction.



#### Application 3:

- with guide plate
- depth of cut adjustment is variable
- pulling cut
- with dust extraction.



#### Application 4:

- with guide plate
- use with GALESKI rail system for exact cuts
- pulling cut
- with dust extraction.

## Strongest in the SMART CUTTER PLUS Series: Powerful 1,750 Watt motor for 40 mm deep cuts!

### GALESKI SMART CUTTER 1700 PLUS

- For freehand cutting
- For cuts using guide plate (with depth of cut adjustment, side stopper, for use with GALESKI rail system for exact cuts - as described on page 42).
- With vacuum cleaner connection, for pulling cut.
- Machine enables good view to cutting area - despite dust extraction.



Central fine adjuster for depth of cut, and lateral lock.

#### SMART CUTTER 1700 VARIO PLUS // Dry stone cutter

**D**



Easy to handle stone cutter for the pulling cut, with guard and vacuum cleaner connection. The guide is removable, making the machine much more versatile.

##### Technical data

|                    |                   |
|--------------------|-------------------|
| Power              | 1,750 Watt        |
| Voltage            | 230/115 Volt      |
| Speed              | 1,700 - 6,800 rpm |
| Tool max.          | 150 mm            |
| Cutting depth max. | 40 mm             |
| Weight             | 3.9 kg            |

##### Included

Silicone connecting cable 4 m, vacuum cleaner connection, rotatable Ø 36-40 mm, removable guide plate with connection to guide rail, stopper plate, plastic coating with velcro, flange, FIXTEC flange nut, ball handle, case.

##### Available versions

|                                     |
|-------------------------------------|
| SMART CUTTER 1700 VARIO PLUS, 230 V |
| SMART CUTTER 1700 VARIO PLUS, 115 V |


| Item no.    |
|-------------|
| 003.036.607 |
| 003.036.608 |

| Price net. |
|------------|
| 758.00 €   |
| 758.00 €   |

Now with 2 protective hoods for one machine:

# DUOCUT - SET

Wet and dry cutter with dust extraction

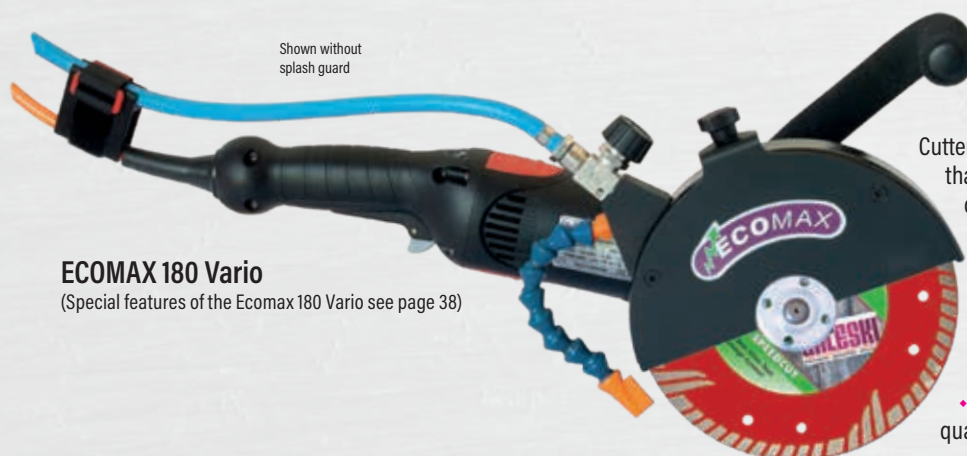

**ECOMAX 180 Vario**

(Special features of the Ecomax 180 Vario see page 38)

Based on the ECOMAX 180 Vario, we additionally equip this machine with a protective hood for dust extraction (from DOMINATOR 180).

Cutter with large cutting depth and 1750 watts of power. So that they can work longer time without fatigue and also creatively.

## Special features:

### 1. Protective hood for wet and dry cutting:

- Water supply via an individually adjustable jointed coolant hose with water nozzle.
- A water regulating valve ensures a finely dosed water quantity.

- Protective hood with easily (un-)mountable cover. This can be easily (un-)mounted with only one star knob screw, without tools.

- Proven, flexible and transparent splash guard. This sucks in less moisture and dirt in the engine compartment. This significantly increases the service life of the machine.

### 2. Protective hood dry cut with suction device for vacuum cleaner:

- The protective hood with suction nozzle offers optimum visibility of the cut on the one hand and convincing dust extraction on the other.

- Protective hood also suitable for cutting close to walls

- Sophisticated suction device: suction connection with swivel joint (freely rotatable), hose spacer ensures distance to handle, optimum, fixed hose routing to behind the machine.

ECOMAX 180 Vario converted to

**Dominator 180 Vario**

(Special features of the Dominator 180 Vario see page 35)



## Included DUOCUT Set:



## DUOCUT - SET // Dry / Wet - Cutter with dust extraction

W D

### Technical data

|                    |                   |
|--------------------|-------------------|
| Power              | 1,750 Watt        |
| Voltage            | 230 / 115 Volt    |
| Speed              | 1,700 - 6,800 rpm |
| Weight             | 4.6 kg            |
| Tool max.          | 180 mm            |
| Cutting depth max. | 58 mm             |
| Tool holder        | M14 / Ø 22.2 mm   |

### Included

Silicone connecting cable 4 m, personal protection switch PRCD or CEE-plug, water hose 2.5 m with brass quick coupling, water control valve, jointed coolant hose, adjustable safety cover with removable front cover, aluminum safety cover with plastic inserts and connection supports for vacuum cleaner, flange, flange nut, twin hole wrench, Socket wrench Ø 6mm, 65 cm extractor hose inside 32 mm Ø, hose connector with Velcro fastening, 4 shims, rubberized bail handle, splash guard, carton.

### Available versions

|                |       |                   |
|----------------|-------|-------------------|
| DUOCUT-SET DI  | 230 V | (with PRCD)       |
| DUOCUT-SET CEE | 230 V | (for transformer) |
| DUOCUT-SET DI  | 115 V | (with PRCD)       |
| DUOCUT-SET CEE | 115 V | (for transformer) |

### Item no.

|             |
|-------------|
| 003.036.651 |
| 003.036.650 |
| 003.036.653 |
| 003.036.652 |

### Price net.


|          |
|----------|
| 925.00 € |
| 885.00 € |
| 925.00 € |
| 885.00 € |

## Quality in Every Detail:

### GALESKI DOMINATOR - 125 / 180 / 250-2

- Powerful dry stone cutter with connection to vacuum cleaner
- Good to hold, well-balanced, low-vibration
- Extraction hose is not in the way:
  - Safety cover with open design
  - The hose is guided cleanly to the rear of the machine

*"... dust extraction won't stop you working ..."*

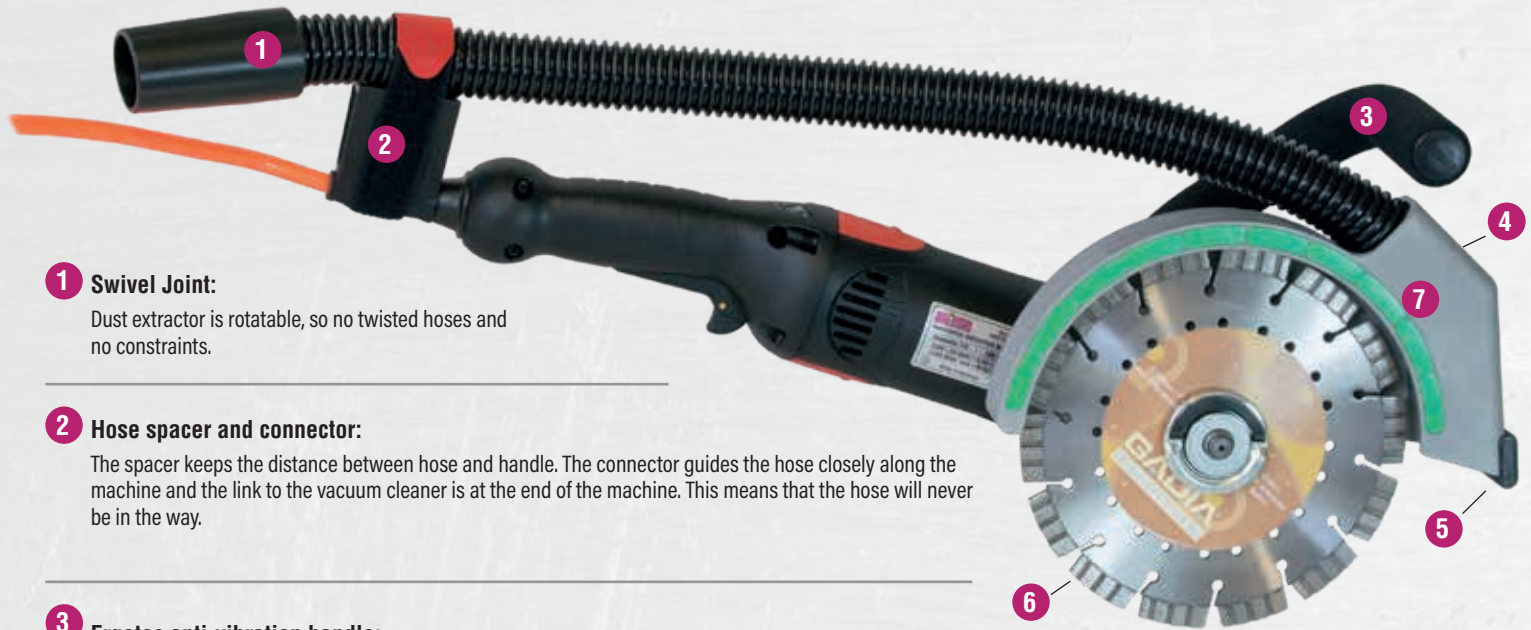

#### 1 Swivel Joint:

Dust extractor is rotatable, so no twisted hoses and no constraints.

#### 2 Hose spacer and connector:

The spacer keeps the distance between hose and handle. The connector guides the hose closely along the machine and the link to the vacuum cleaner is at the end of the machine. This means that the hose will never be in the way.

#### 3 Ergotec anti-vibration handle:

The soft grip foam handle is good to hold.

#### 4 The safety cover is adjustable:

Easy-to-adjust raster positioning, backwards and forwards.



#### 5 Plastic support (replaceable):

For nonabrasive contact with the stone.



#### 6 Two possible positions for the saw blade:

- 1. Normal:**  
centrally in the safety cover.
- 2. With a flange:**  
at the outer edge of the safety cover.



#### 7 Aluminum safety cover with open design:

The cover with connection to a vacuum cleaner provides a clear view to the cut, and also good-quality dust extraction.

Dominator 125 / 180 / 250



**DOMINATOR 125** // Dry stone cutter**D**

Compact stone cutter with vacuum cleaner connection. Adjustable 1500 Watt motor, powerful enough to cut tiles and slabs. Safety cover suitable for cutting close to walls using saw blades and flange.

**Technical data**

|                    |                   |
|--------------------|-------------------|
| Power              | 1,500 Watt        |
| Voltage            | 230 / 115 Volt    |
| Speed              | 2,700 - 9,500 rpm |
| Tool holder        | M14 / Ø 22.2      |
| Tool max.          | 125 mm            |
| Cutting depth max. | 30 mm             |
| Weight             | 3.5 kg            |

**Included**

Silicone connecting cable 4 m, Aluminum safety cover with plastic inserts and connection supports for vacuum cleaner, flange, flange nut, twin hole wrench, 65 cm extractor hose inside 32 mm Ø, hose connector with Velcro fastening, 4 shims, handle, carton/case.

**Available versions**

|                           |
|---------------------------|
| DOMINATOR 125 230V carton |
| DOMINATOR 125 230V case   |
| DOMINATOR 125 115V carton |
| DOMINATOR 125 115V case   |

**Item no.**

|             |
|-------------|
| 003.036.357 |
| 003.036.353 |
| 003.036.368 |
| 003.036.369 |

**Price net.**

|          |
|----------|
| 569.00 € |
| 619.00 € |
| 569.00 € |
| 619.00 € |

**DOMINATOR 180** // Dry stone cutter**D**

Professional stone cutter with extraction unit and vacuum cleaner connection. The large safety cover for saw blades up to 180 mm Ø means you can cut to 60 mm. Safety cover suitable for cutting close to walls using saw blades and flange.

**Technical data**

|                    |                   |
|--------------------|-------------------|
| Power              | 1,750 Watt        |
| Voltage            | 230 / 115 Volt    |
| Speed              | 1,700 - 6,800 rpm |
| Tool holder        | M14 / Ø 22.2      |
| Tool max.          | 180 mm            |
| Cutting depth max. | 60 mm             |
| Weight             | 4.0 kg            |

**Included**

Silicone connecting cable 4 m, aluminum safety cover with plastic inserts and connection supports for vacuum cleaner, flange, FIXTEC flange nut, 65 cm extractor hose inside 32 mm Ø, hose connector with Velcro fastening, 4 shims, rubberized bail handle, carton/case.

**Available versions**

|                           |
|---------------------------|
| DOMINATOR 180 230V carton |
| DOMINATOR 180 230V case   |
| DOMINATOR 180 115V carton |
| DOMINATOR 180 115V case   |

**Item no.**

|             |
|-------------|
| 003.036.356 |
| 003.036.352 |
| 003.036.358 |
| 003.036.359 |

**Price net.**

|          |
|----------|
| 699.00 € |
| 759.00 € |
| 699.00 € |
| 759.00 € |

**DOMINATOR 250/2** // Dry stone cutter**D**

Rotating switch handle adjustable in 7 positions.

Professional stone cutter with extraction unit and vacuum cleaner connection. The large safety cover for saw blades up to 250 mm Ø means you can cut to 75 mm. Safety cover suitable for cutting close to walls using saw blades and flange.

**Technical data**

|                    |              |
|--------------------|--------------|
| Power              | 2,400 Watt   |
| Voltage            | 230 Volt     |
| Speed              | 6,600 rpm    |
| Tool holder        | M14 / Ø 22.2 |
| Tool max.          | 250 mm       |
| Cutting depth max. | 75 mm        |
| Weight             | 8.0 kg       |

**Included**

Silicone connecting cable 4 m, aluminum safety cover with plastic inserts and connection supports for vacuum cleaner, stainless steel flange, stainless steel flange nut with 6 mounting holes and screws, 100 cm extractor hose inside 36 mm Ø, hose connector with Velcro fastening, 4 shims, wrench size 32 mm, counterholder, rubberized bail handle, carton/case.

**Available versions**

|                             |
|-----------------------------|
| DOMINATOR 250/2 230V carton |
| DOMINATOR 250/2 230V case   |

**Item no.**

|             |
|-------------|
| 003.036.355 |
| 003.036.351 |

**Price net.**

|            |
|------------|
| 998.00 €   |
| 1,098.00 € |



Wet and dry stone cutter

**ECOMAX**


180 - 230/2

## Allround stone cutter


with many applications for  
"eco"-nomic cutting

Wet and Dry

- Robust ... in action!
- Effective ... operation!
- Affordable ... in price!

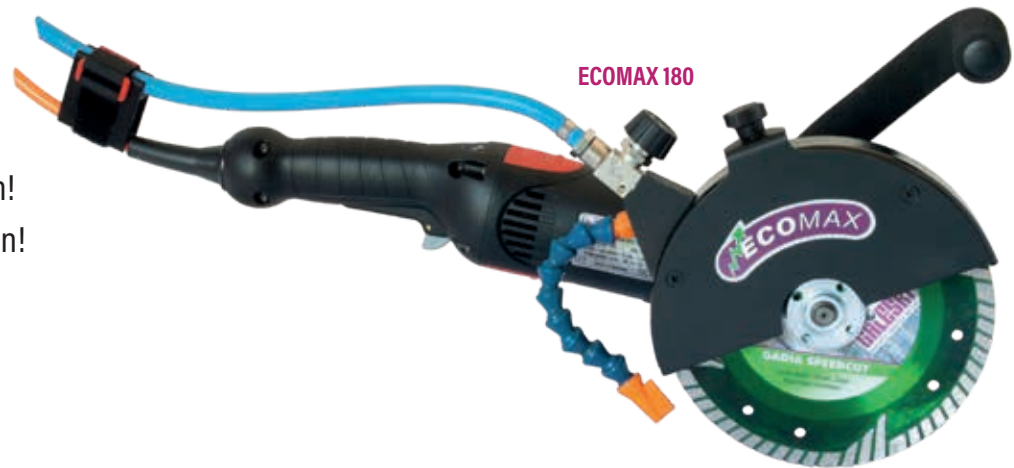

ECOMAX 230/2

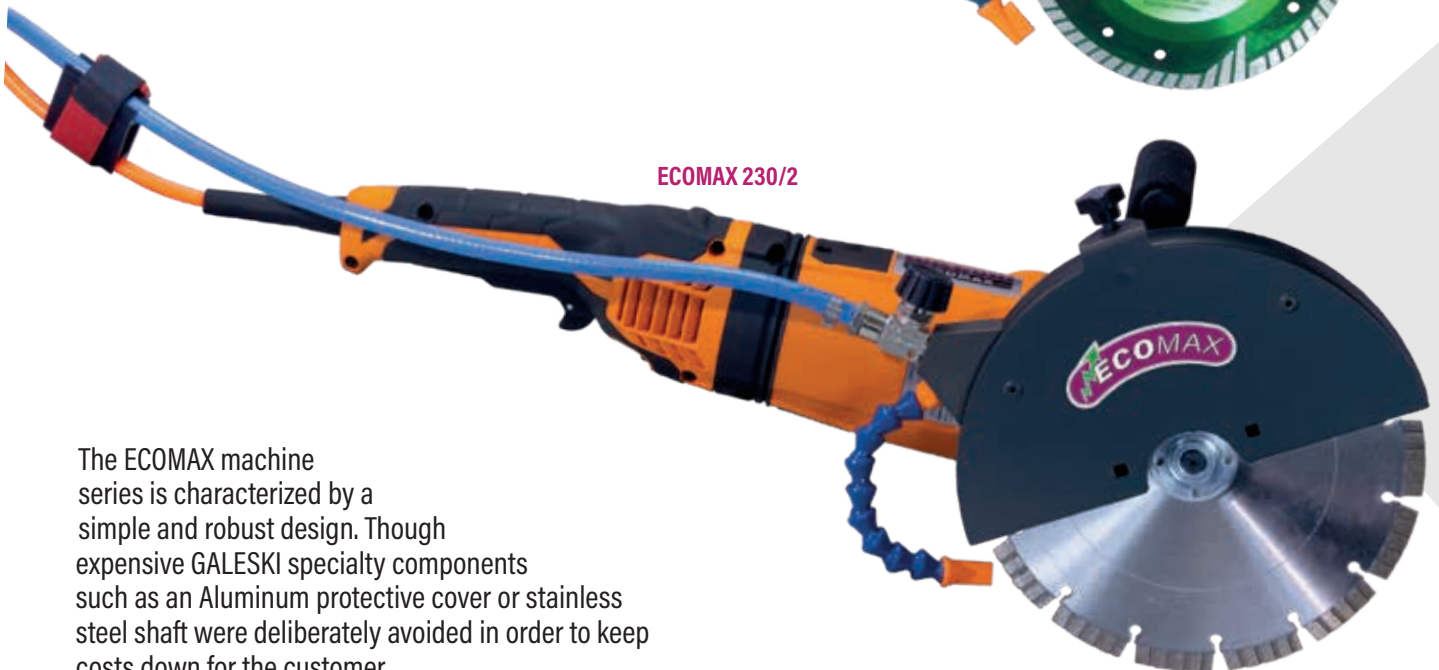

The ECOMAX machine series is characterized by a simple and robust design. Though expensive GALESKI specialty components such as an Aluminum protective cover or stainless steel shaft were deliberately avoided in order to keep costs down for the customer.

We haven't lost sight of creating a serious line of machinery for effective work:

- With all 3 variants, the water supply takes place via an individually adjustable articulated hose with a preset water nozzle.
- A water regulating valve ensures a finely adjustable water quantity regulation.
- An easily removable cover sits in front of the protective cover. This can be easily removed when replacing the cutting wheel with only one star knob screw without tools (Fig. 1).
- For a long service life, the machine body is fitted with a flexible plastic splash guard that largely prevents the water mist from being drawn into the motor (Fig. 2).
- ECOMAX machines are very handy and the ECOMAX 180/230 are also equipped with an "Ergotec" handle, so that the machine fits comfortably and vibration-free in the hand.



Fig. 1

Fig. 1

### Safety cover - with or without lid?

- If desired, the machine can also be operated without the lid on the protective cover (e.g. for a better view of the cut). It is very easy to remove.
- This also allows different positions of the cut-off wheel at a distance from the machine, on the working spindle.

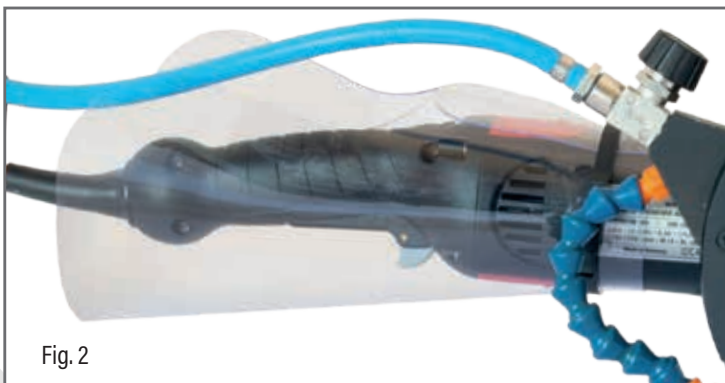


Fig. 2

Fig. 2

### Proven Gadia "Splash":

### Good for the machine - Good for the user

- The transparent, flexible splash guard prevents the water mist from taking in wet stone dust. This is a decisive factor for the long service life of the machine.

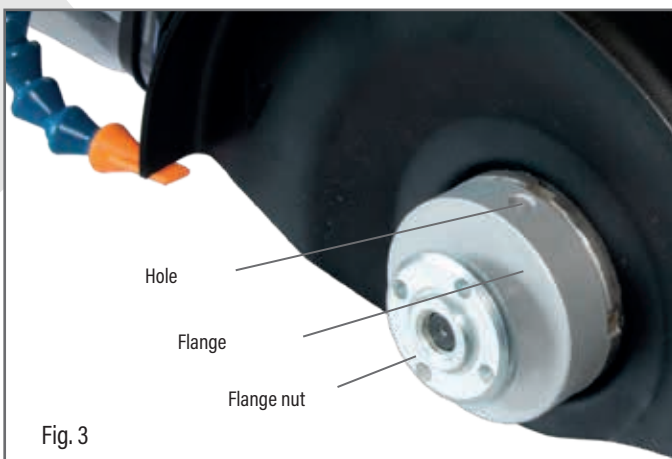


Fig. 3

Fig. 3

### Large special clamping flange with 3-fold function:

- Its large diameter causes the cooling water to be thrown away during wet operation. It serves as additional protection against cooling water seeping into the spindle bearing.
- In addition, the size of the special flange gives the cut-off wheel additional stability causing it to "flutter" less.
- Should the cut-off wheel ever be mounted particularly firmly, the enclosed socket wrench can be inserted into the bore of the clamping flange and used to hold it in place (instead of the spindle lock) when changing tools.



Fig. 4

Fig. 4


### Cooling water arrives exactly where you want it:

A flexible adjustable articulated hose with nozzle ensures precise water supply. This allows you to work with a minimum of cooling water (less sludge contamination).

Strong and handy

## GALESKI ECOMAX 180 Vario Wet and Dry stone cutter

Stone cutter with a large cutting depth and 1,750 watts of power, with which you can also work effortlessly and creatively for a longer period of time.

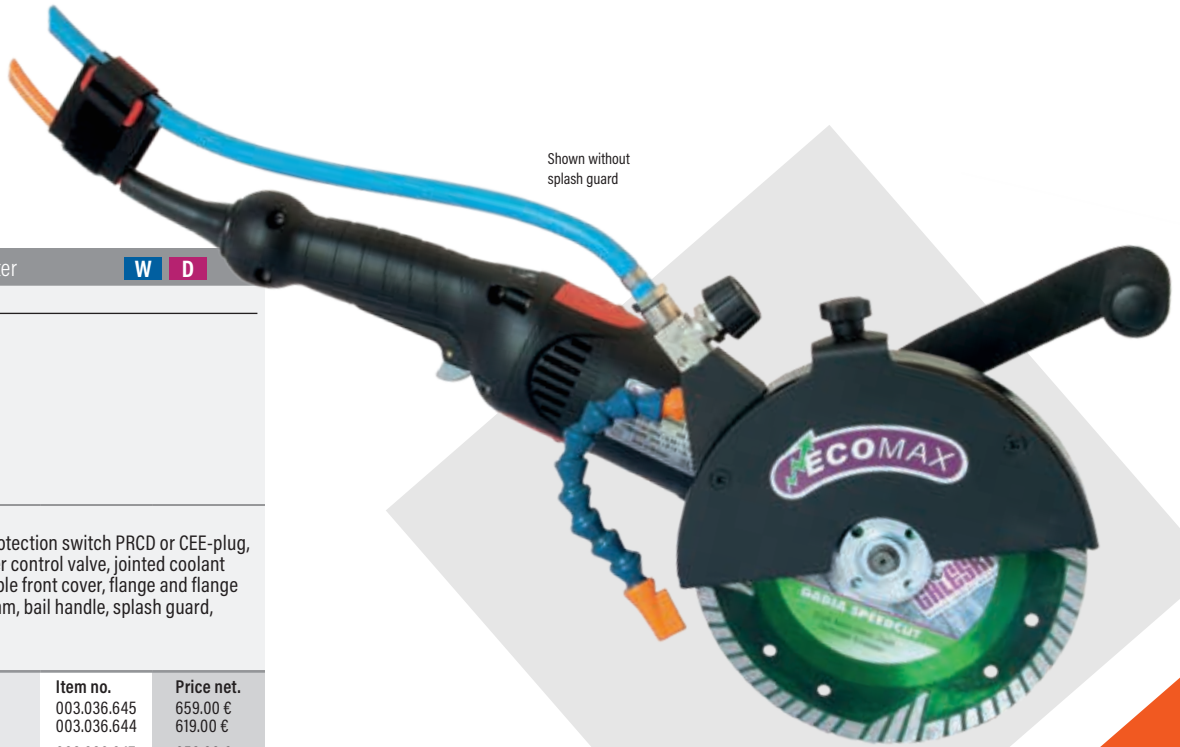

### ECOMAX 180 Vario // Dry / Wet - Cutter

#### Technical data

|                     |                   |
|---------------------|-------------------|
| Power               | 1,750 Watt        |
| Voltage             | 230 / 115 Volt    |
| Speed               | 1,700 - 6,800 rpm |
| Weight              | 4.6 kg            |
| Tool max.           | 180 mm            |
| Cutting depth max.: | 58 mm             |
| Tool holder         | M14 / Ø 22.2 mm   |

#### Included

Silicone connecting cable 4 m, personal protection switch PRCD or CEE-plug, hose 2.5 m with brass quick coupling, water control valve, jointed coolant hose, adjustable safety cover with removable front cover, flange and flange nut, twin hole wrench, socket wrench Ø 6mm, bail handle, splash guard, carton.

#### Available versions

|                                              | Item no.    | Price net. |
|----------------------------------------------|-------------|------------|
| ECOMAX 180 Vario DI 230 V (with PRCD)        | 003.036.645 | 659.00 €   |
| ECOMAX 180 Vario CEE 230 V (for transformer) | 003.036.644 | 619.00 €   |
| ECOMAX 180 Vario DI 115 V (with PRCD)        | 003.036.647 | 659.00 €   |
| ECOMAX 180 Vario CEE 115 V (for transformer) | 003.036.646 | 619.00 €   |

Powerful and ergonomic

## GALESKI ECOMAX 230/2 Con

Wet and Dry stone cutter

Rugged stone cutter with high power reserves for continuous use.

Shown without splash guard



### ECOMAX 230/2 Con // Dry / Wet - Cutter

#### Technical data

|                     |                 |
|---------------------|-----------------|
| Power               | 2,400 Watt      |
| Voltage             | 230 Volt        |
| Speed               | 6,600 rpm       |
| Weight              | 7.4 kg          |
| Tool max.           | 230 mm          |
| Cutting depth max.: | 63 mm           |
| Tool holder         | M14 / Ø 22.2 mm |

#### Included


Silicone connecting cable 4 m, personal protection switch PRCD or CEE-plug, hose 2.5 m with brass quick coupling, water control tap, jointed coolant hose, adjustable safety cover with removable front cover, flange and flange nut, twin hole wrench, side handle, splash guard, carton.

#### Available versions

|                                              | Item no.    | Price net. |
|----------------------------------------------|-------------|------------|
| ECOMAX 230/2 Con DI 230 V (with PRCD)        | 003.036.649 | 699.00 €   |
| ECOMAX 230/2 Con CEE 230 V (for transformer) | 003.036.648 | 659.00 €   |




Rotating switch handle adjustable in 7 positions.

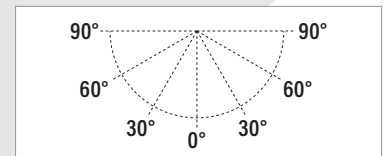

## For Freehand Cuts


### GALESKI TIGERCUT 200 VARIO

- Powerful one-hand grinder - constant speed control with lots of power reserves for continuous running.
- Adjustable cover positioning for horizontal and vertical cuts.
- Precise positioning and cutting using the guide nibs.
- Very thin safety cover enables a good view to the cut.
- Autobalancer provides vibration protection leading to a longer life for the machine and the sawblade.

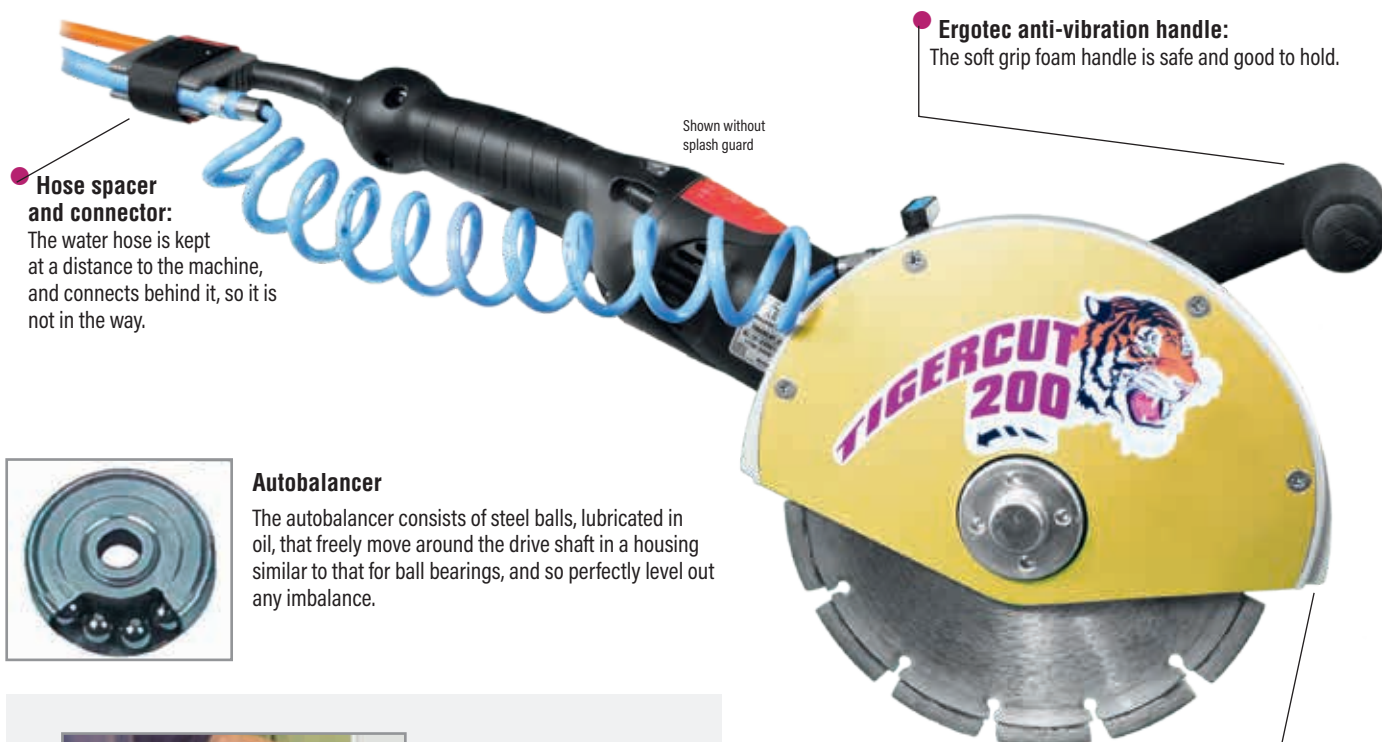

#### Autobalancer

The autobalancer consists of steel balls, lubricated in oil, that freely move around the drive shaft in a housing similar to that for ball bearings, and so perfectly level out any imbalance.

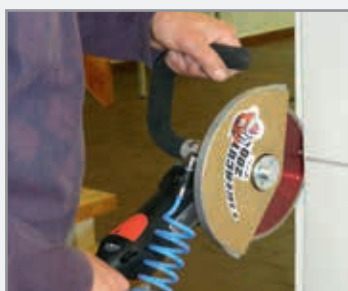

Adjustable cover positioning for horizontal ...



or vertical cutting



Quick fastening on adjustable safety cover



#### Guide Nibs

to position along the cutting line (on the front and back edges of the safety cover)

#### TIGERCUT 200 VARIO // Wet-Cutter

**W**

Professional freehand wet cutter for a wide range of uses. Compact design with large cutting depth of maximum 6.3 cm.

##### Technical data

|                    |                   |
|--------------------|-------------------|
| Power              | 1,750 Watt        |
| Voltage            | 230 / 115 Volt    |
| Speed              | 1,700 - 6,800 rpm |
| Tool max.          | 200 mm            |
| Cutting depth max. | 63 mm             |
| Spindle thread     | M14               |
| Weight             | 3.5 kg            |

##### Included

Silicone connecting cable 4 m, bail handle, hose connector with Velcro fastening, hose 2.5 m, guard with water supply, bayonet lock, water feeding, splash guard, twin hole wrench, autobalancer, personal protection switch PRCD, case

##### Available versions



|                                               |
|-----------------------------------------------|
| TIGERCUT 200 VARIO DI 230V (with PRCD)        |
| TIGERCUT 200 VARIO CEE 230V (for transformer) |
| TIGERCUT 200 VARIO DI 115V (with PRCD)        |
| TIGERCUT 200 VARIO CEE 115V (for transformer) |

| Item no.    | Price net. |
|-------------|------------|
| 003.036.201 | 934.00 €   |
| 003.036.204 | 894.00 €   |
| 003.036.203 | 934.00 €   |
| 003.036.205 | 894.00 €   |

**Dry cutter with vacuum cleaner connection or wet cutter with water feeding or freehand cutter or with a guide plate or EVERYTHING - IN ONE MACHINE::**


## GALESKI LIONCUT 200 - DRY / DRY PLUS / COMBI / COMBI PLUS

- Strong, compact, and well-balanced machine. Cuts to 6.3 cm depth.
- Very thin and open-design safety cover provides a good view to the cutting area, but also good dust extraction, or precise water feeding (e.g. rinsing nozzle for edge of cut).
- Extraction hose or water hose is not in the way.
- The adapter makes it easy to quickly change from a **dry** to a **wet** cut (water feeding or dust extraction).
- Easy-to-fit base plate (suitable for GALESKI rail system).

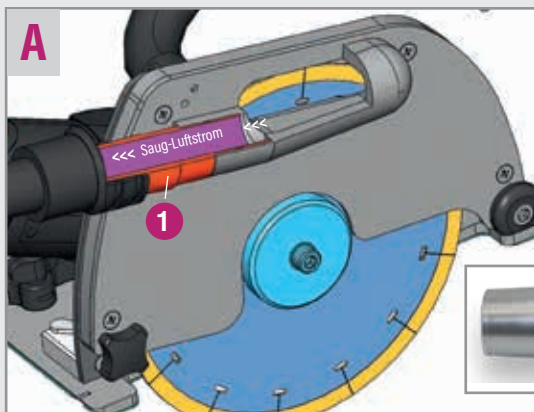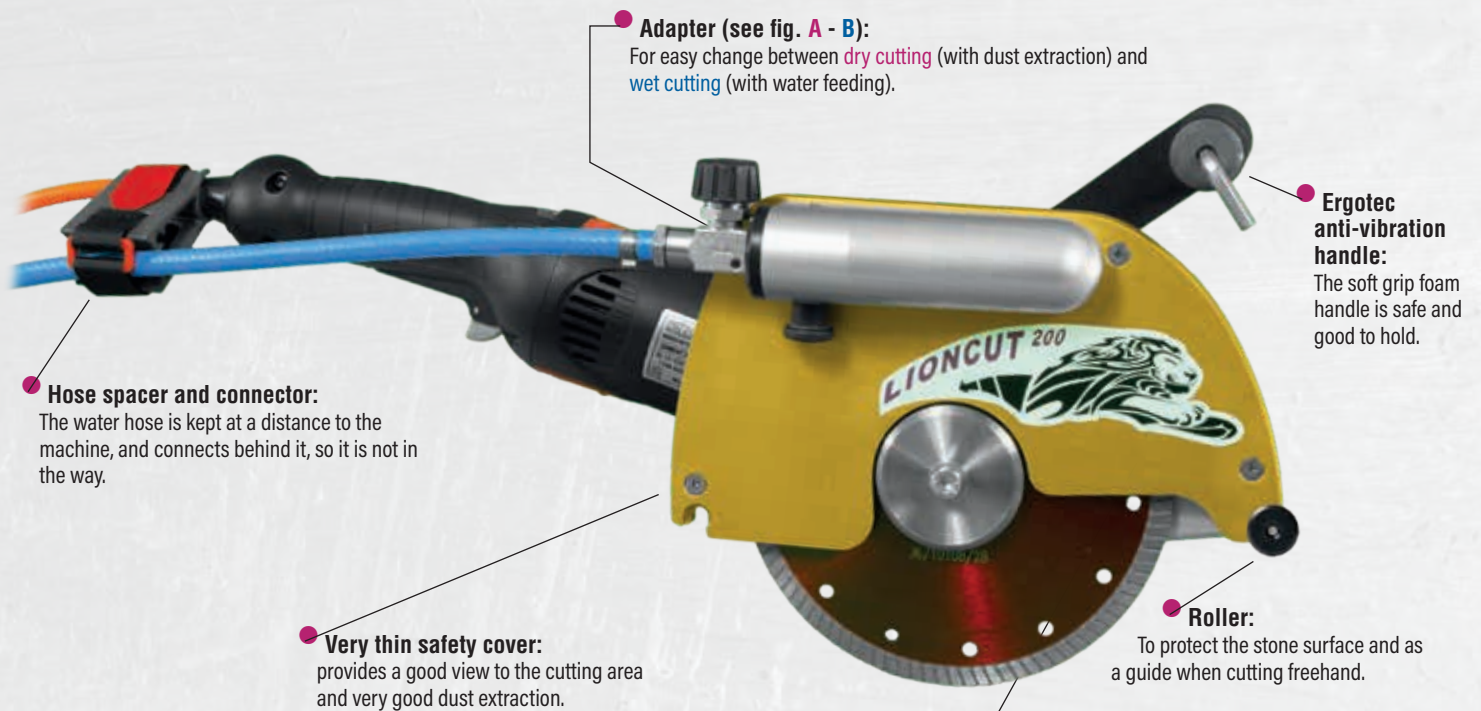

**Dust extraction or water feeding?**


**Adapter 1 :**  
for dust extraction when cutting dry.

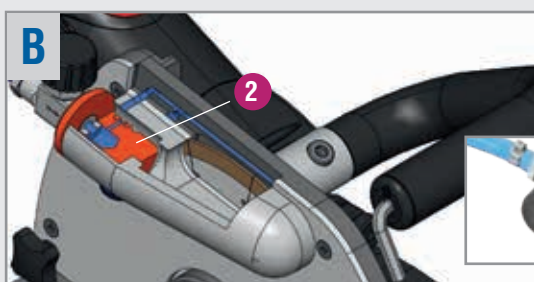

**Adapter 2 :**  
for water feeding when cutting wet.



**Water feeding within the safety cover:**  
spray nozzles **3** and **4** : to cool the disc.  
**rinsing nozzle 5** : for edge of cut. To rinse away debris and provide a clear view.

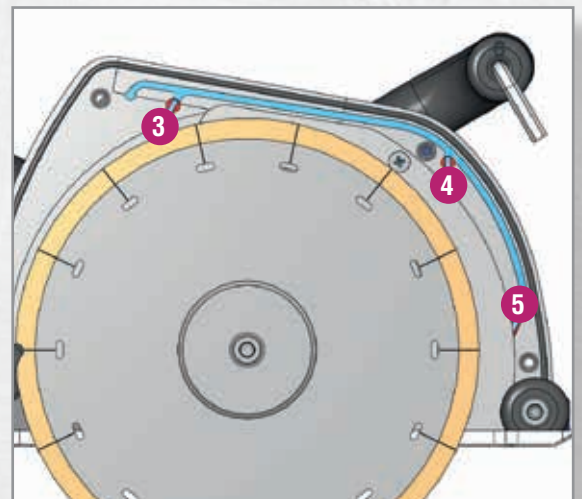

**Freehand cutting:**

Well-balanced machine is good to hold. The thin safety cover provides a >>> clear view to the cut.

**Cutting with guide plate:**

The guide plate can be used with, or without, the GALESKI rail system.

**LIONCUT 200 VARIO DRY // Dry-Cutter****D**

The LIONCUT 200 VARIO DRY is a professional freehand dry stone cutter with connection to a vacuum cleaner.

**Technical data**

|                    |                   |
|--------------------|-------------------|
| Power              | 1,750 Watt        |
| Voltage            | 230 / 115 Volt    |
| Speed              | 1,700 - 6,800 rpm |
| Tool max.          | 200 mm            |
| Cutting depth max. | 63 mm             |
| Weight             | 5.5 kg            |

**Included**

Silicone connecting cable 4 m, with extraction hood and connecting tube for vacuum cleaner, autobalancer, hose connector with Velcro fastening, allen wrench, case.

**Available versions**

|                            |
|----------------------------|
| LIONCUT 200 VARIO DRY 230V |
| LIONCUT 200 VARIO DRY 115V |

**Item no.**

|             |
|-------------|
| 003.036.300 |
| 003.036.301 |

**Price net.**

|            |
|------------|
| 1,036.00 € |
| 1,036.00 € |

**LIONCUT 200 VARIO DRY PLUS // Dry-Cutter****D**

With guide plate and adapter

The LIONCUT 200 VARIO DRY PLUS is a professional dry stone cutter with a removable guide plate and connection to a vacuum cleaner.

**Technical data**

|                    |                   |
|--------------------|-------------------|
| Power              | 1,750 Watt        |
| Voltage            | 230 / 115 Volt    |
| Speed              | 1,700 - 6,800 rpm |
| Tool max.          | 200 mm            |
| Cutting depth max. | 63 mm             |
| Weight             | 6.0 kg            |

**Included**

Silicone connecting cable 4 m, with extraction hood and connecting tube for vacuum cleaner, guide slide with felt coating for polished surfaces and plastic velcro base for rough surfaces, autobalancer, hose connector with Velcro fastening, allen wrench, case.

**Available versions**


|                                 |
|---------------------------------|
| LIONCUT 200 VARIO DRY PLUS 230V |
| LIONCUT 200 VARIO DRY PLUS 115V |

**Item no.**

|             |
|-------------|
| 003.036.302 |
| 003.036.303 |

**Price net.**

|            |
|------------|
| 1,295.00 € |
| 1,295.00 € |

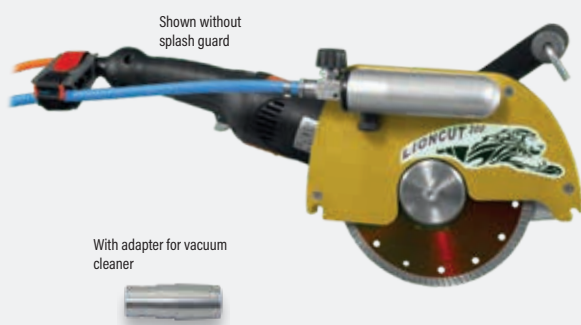**LIONCUT 200 VARIO COMBI // Dry / Wet - Cutter****W****D**

Shown without splash guard

With adapter for vacuum cleaner

The LIONCUT 200 VARIO COMBI is a professional freehand wet and dry stone cutter with connection to vacuum cleaner, includes water feeding for conversion to wet use.

**Technical data**

|                    |                   |
|--------------------|-------------------|
| Power              | 1,750 Watt        |
| Voltage            | 230 / 115 Volt    |
| Speed              | 1,700 - 6,800 rpm |
| Tool max.          | 200 mm            |
| Cutting depth max. | 63 mm             |
| Weight             | 5.5 kg            |

**Included**

Silicone connecting cable 4 m, with extraction hood and connecting tube for vacuum cleaner, water connecting set, autobalancer, hose connector with Velcro fastening, allen wrench, splash guard, personal protection switch PRCD or CEE-plug, case.

**Available versions**

|                                                    |
|----------------------------------------------------|
| LIONCUT 200 VARIO COMBI DI 230V (with PRCD)        |
| LIONCUT 200 VARIO COMBI CEE 230V (for transformer) |
| LIONCUT 200 VARIO COMBI DI 115V (with PRCD)        |
| LIONCUT 200 VARIO COMBI CEE 115V (for transformer) |

**Item no.**

|             |
|-------------|
| 003.036.304 |
| 003.036.305 |
| 003.036.306 |
| 003.036.307 |

**Price net.**

|            |
|------------|
| 1,184.00 € |
| 1,144.00 € |
| 1,184.00 € |
| 1,144.00 € |

**LIONCUT 200 VARIO COMBI PLUS // Dry / Wet - Cutter****W****D**

With guide plate and adapter

Shown without splash guard

With adapter for vacuum cleaner

The LIONCUT 200 VARIO COMBI PLUS is a professional wet and dry stone cutter with a removable guide plate and connection to a vacuum cleaner, includes water feeding for conversion to wet use.

**Technical data**

|                    |                   |
|--------------------|-------------------|
| Power              | 1,750 Watt        |
| Voltage            | 230 / 115 Volt    |
| Speed              | 1,700 - 6,800 rpm |
| Tool max.          | 200 mm            |
| Cutting depth max. | 63 mm             |
| Weight             | 6.0 kg            |

**Included**

Silicone connecting cable 4 m, with extraction hood and connecting tube for vacuum cleaner, water connecting set, guide slide with felt coating for polished surfaces and plastic velcro base for rough surfaces, autobalancer, hose connector with Velcro fastening, allen wrench, splash guard, personal protection switch PRCD or CEE-plug, case.

**Available versions**

|                                                         |
|---------------------------------------------------------|
| LIONCUT 200 VARIO COMBI PLUS DI 230V (with PRCD)        |
| LIONCUT 200 VARIO COMBI PLUS CEE 230V (for transformer) |
| LIONCUT 200 VARIO COMBI PLUS DI 115V (with PRCD)        |
| LIONCUT 200 VARIO COMBI PLUS CEE 115V (for transformer) |

**Item no.**


|             |
|-------------|
| 003.036.308 |
| 003.036.309 |
| 003.036.310 |
| 003.036.311 |

**Price net.**

|            |
|------------|
| 1,468.00 € |
| 1,428.00 € |
| 1,468.00 € |
| 1,428.00 € |





# RAIL SYSTEM for

## TURBOCUT 160 / LIONCUT 200 / SMART CUTTER 125 PLUS • 1500 PLUS • 1700 PLUS

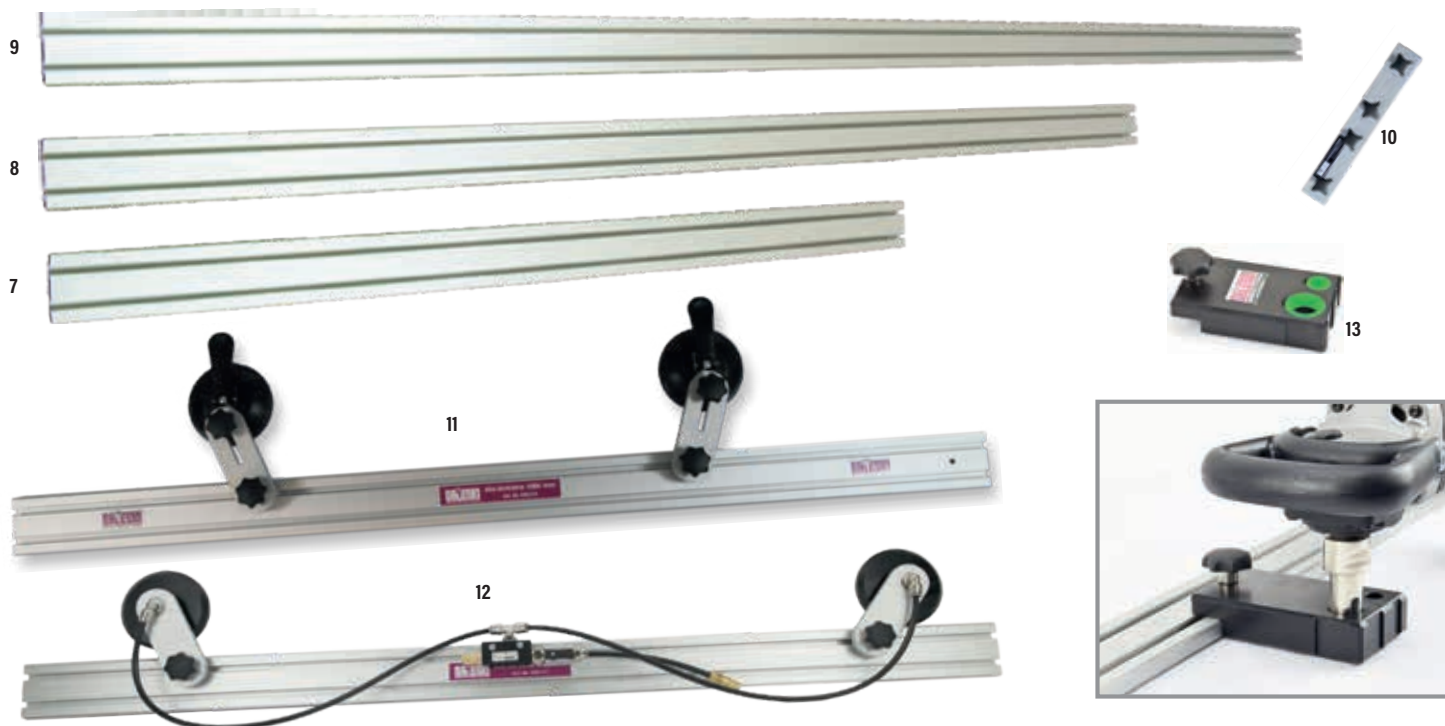

| Designation                                                               | Description                                                                            | Item No.    | Price € |
|---------------------------------------------------------------------------|----------------------------------------------------------------------------------------|-------------|---------|
| <b>GALESKI RAIL SYSTEM for TURBOCUT 160, LIONCUT 200 and SMART CUTTER</b> |                                                                                        |             |         |
| (7) Aluminum rail, short                                                  | 100 cm, rubber-mounted                                                                 | 036.121     | 61.00   |
| (8) Aluminum rail, medium                                                 | 150 cm, rubber-mounted                                                                 | 036.122     | 86.00   |
| (9) Aluminum rail, long                                                   | 200 cm, rubber-mounted                                                                 | 036.123     | 110.00  |
| (10) Connecting adapter                                                   | Joins rails to each other                                                              | 060.036.124 | 102.00  |
| (11) Basic set for smooth surfaces                                        | 100 cm, 2 suction cups Ø 90 mm                                                         | 036.120     | 249.00  |
| Suction cup, 1 piece                                                      | Ø 90 mm, complete with rail fastener (as supplement for additional rails)              | 036.125     | 107.00  |
| (12) Basic set for rough surfaces                                         | 100 cm, 2 vacuum suction cups Ø 80 mm, Venturi-system for connection to compressed air | 036.126     | 279.00  |
| Vacuum suction cup, 1 piece                                               | Ø 90 mm, complete with rail fastener (as supplement for additional rails)              | 036.127     | 84.00   |
| (13) Drilling aid, 2 pieces                                               | For drill Ø 10 and 20 mm. With quick connector. For dry use.                           | 022.078     | 110.00  |

# GADIA LINE rail system for GALESKI WETCUT 180/3 VARIO

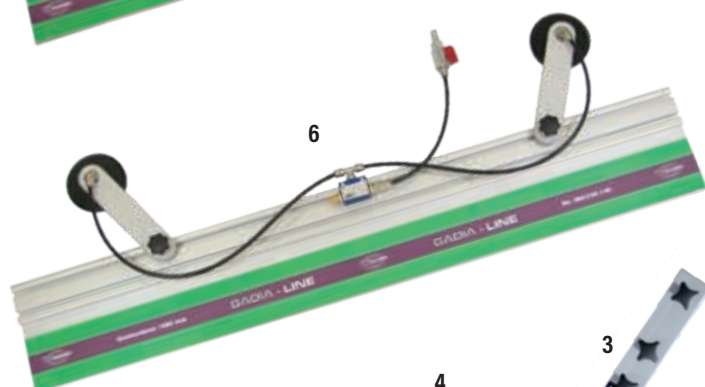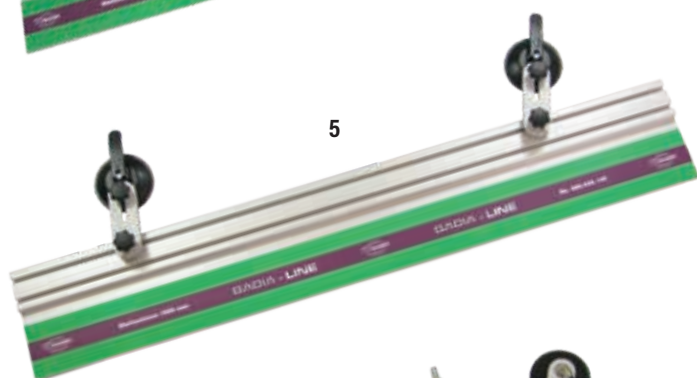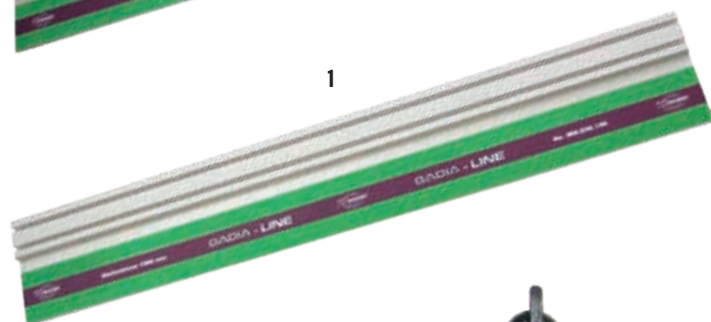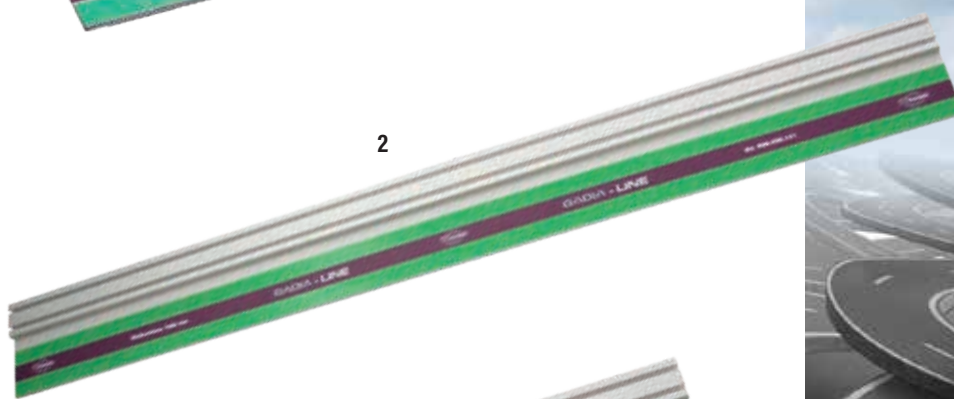

| Designation                                  | Description                                                                            | Item No.    | Price € |
|----------------------------------------------|----------------------------------------------------------------------------------------|-------------|---------|
| <b>GALESKI RAIL SYSTEM for WETCUT 180/3</b>  |                                                                                        |             |         |
| (1) GADIA LINE, short                        | 100 cm, with coating on the top and anti-slip rubber underneath                        | 060.036.140 | 110.00  |
| (2) GADIA LINE, long                         | 150 cm, with coating on the top and anti-slip rubber underneath                        | 060.036.141 | 167.00  |
| (3) Connecting adapter                       | Joins rails to each other                                                              | 060.036.124 | 75.00   |
| (4) Connecting adapter                       | Guide and connector for WETCUT 180/3                                                   | 036.128     | 63.00   |
| (5) GADIA LINE Basic Set for smooth surfaces | 100 cm, 2 suction cups Ø 90 mm                                                         | 060.036.143 | 313.00  |
| Suction cup, 1 piece                         | Ø 90 mm, complete with rail fastener (as supplement for additional rails)              | 060.036.144 | 107.00  |
| (6) GADIA LINE Basic Set for rough surfaces  | 100 cm, 2 vacuum suction cups Ø 80 mm, Venturi-system for connection to compressed air | 060.036.145 | 366.00  |
| Vacuum suction cup, 1 piece                  | Ø 80 mm, complete with rail fastener (as supplement for additional rails)              | 060.036.146 | 88.00   |

## Well Proven Drilling System - Freehand or with a Drill Stand

### GALESKI DIAMOND 1503

- with large power reserves for drilling to Ø 90 mm.
- Electronic speed control and soft start for unproblematic freehand drilling and precise centering of the drill.
- Safety clutch protects the user and the machine if the tool blocks.



Similar binding.



GT 402

## Drill Stands

### GALESKI

### GT 402, GTA 500, GTA 500V (VACUUM DRILL STAND)

- The suction cups mean you can attach the stand horizontally or vertically with a high holding force.
- The GTA 500 has a rubber seal under the base plate so that drill residue can be removed with a wet vacuum cleaner.
- Drill holders can be supplied for different machines. These can be custom-made upon request.
- All parts are non-corrosive and long-life.



GTA 500

## GT 402 // Suction drill stand

W D

The GT 402 drill stand is equipped with 3 suction pads Ø 100 mm so that it can be fastened horizontally or vertically. Machine holder is easy to change with its dovetail connection. The feed lever can be used on both sides and the complete drill column can be rotated 360°. Delivery without reducing ring. Simply order the suitable reducing ring directly with it. (see below)

ATTENTION: Reducing ring not included in delivery ! (see below)



## Technical data

|                  |             |
|------------------|-------------|
| Rotatable column | 360°        |
| Suction pads     | 3x Ø 100 mm |
| max. hole-Ø      | 70 mm       |
| Drill lift max.  | 400 mm      |
| Weight           | 8.0 kg      |

## Included

Base plate with 3 rubber lever suction cups, aluminum profile column, feed unit, adjustable carrying handle, feed lever, machine mounting socket Ø 60 mm, open-end wrenches 17/19/32 mm, allen wrenches 4/5/6/8 mm.

## Available versions

GT 402

## Item no.

012.021.101

## Price net.

898.00 €

## GTA 500 // Suction drill stand

W D

The GTA 500 drill stand is equipped with 2 suction pads Ø 125 mm. The column and machine holders are the same as on the GT 402, but in addition a rubber sealing lip can be fitted under the base plate which, when fitted to a vacuum cleaner, cleans away the drilling mud.

ATTENTION: Reducing ring not included in delivery ! (see below)



## Technical data

|                  |             |
|------------------|-------------|
| Rotatable column | 360°        |
| Suction pads     | 2x Ø 125 mm |
| max. hole-Ø      | 80 mm       |
| Drill lift max.  | 400 mm      |
| Weight           | 10.0 kg     |

## Included

Base plate with 2 rubber suction cups, aluminum-profile column, feed unit, adjustable handle, feed lever, rubber seal, suction hose, wrench size 17/19/32 mm, allen wrench 4/5/6/8 mm.

## Available versions

GTA 500

## Item no.

012.021.102

## Price net.

998.00 €

## REDUCING RINGS for Suction drill stands

## Designation

## Description

## Item no.

## Price net.



Adjacent reducing rings compensate the difference of Ø machine mounting drill stand (60mm) and Ø clamping neck (machine).

Reducing ring Ø 60/57 mm: for Diamond 150

029.467

49,00 €

Reducing ring Ø 60/53 mm: for Diamond 1700, Polifox 1700, Joker Maxi, Joker Speed

029.498

49,00 €

Reducing ring Ø 60/43 mm: for many standard machines

029.468

49,00 €

## Additional support for drill stand

W D

The design of the GT 402 and GTA 500 drill stands increase the tilt and lever forces. To work against these, you can add a support to make them safer. Especially in cases when you have to drill at position 0°, 90°, or 270°.



Pos.= 0°

Pos.= 90°

Pos.= 270°



## Additional support with suction

## Item no.

021.140

## Price net.

248.00 €

## DIAMOND 1503 DI // Drilling machine

W



The DIAMOND 1503 has enormous power reserves for drilling up to Ø 90 mm.

## Technical data

|                  |               |
|------------------|---------------|
| max. drill Ø     | 90 mm         |
| Speed            | 0 - 3,700 rpm |
| Power            | 1,500 Watt    |
| Voltage          | 230 Volt      |
| Drill connection | R 1/2"        |
| Weight           | 4.1 kg        |

## Included

Silicone connecting cable 4 m, water rinsing head, water tap, hose with brass quick coupling, personal protection switch PRCD, case.

## Available versions

DIAMOND 1502 DI

## Item no.

036.002E

## Price net.

1.098.00 €

# “Elementary, my dear Watson ...”


- You don't want a heavy unwieldy machine, but something compact and manageable that will make your work day easier.
- The drilling motor shouldn't be too big, but not too small. Just the right size - with power in reserve.
- Wet drilling - but clean work.
- Drilling in series, economically and quickly.

... It's obvious.  
All the evidence points to  
the **GALESKI-COMBINATOR**.

The long search was worth it.

Combine - put together - what you need  
from our Combinator Drilling System.

The best thing about it: it grows with  
the tasks required of it. You can easily  
add whatever you need.

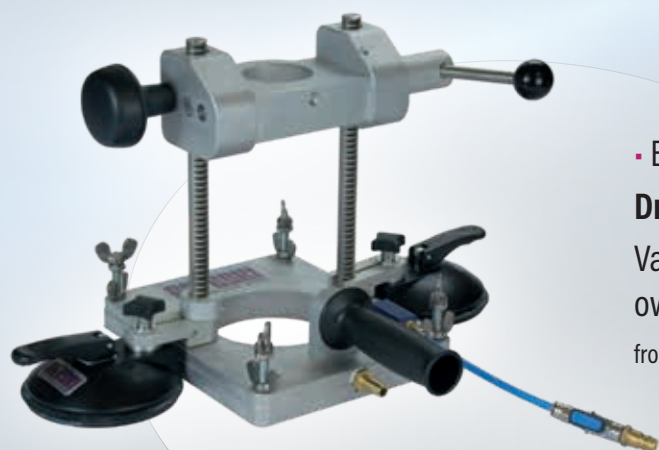

- Economical start:

## Drilling stand system **COMBINATOR SOLO**:

Various equipment available for your  
own drill.

from page 48

- Light and manageable - strongly built ...

## Wet drilling stand **COMBINATOR BASIC**:

Various equipment available for drilling motor with  
diamond drills to Ø 70 mm.

from page 49



The GALESKI COMBINATOR grows with the tasks required of it.

Questions? Ideas? Feel free to call us on +49 2663 9437-0 or send an E-Mail to [info@galeski.de](mailto:info@galeski.de)



- Drill facade panels economically ...

**Wet drilling stand COMBINATOR FACADE:**

Various equipment options with multiple stop system.

from page 50

- Completely equipped ...

**Wet drilling stand COMBINATOR UNIVERSAL:**

Various equipment options for surface and edge drilling.

from page 51



- Very powerful and with VENTURI system ...

**Wet drilling stand COMBINATOR PLUS:**

Various equipment options for surface drilling to Ø 107 mm.

from page 53

**More**  
on the  
following  
pages

# UNIQUE -

## The main advantage of the GALESKI COMBINATOR

### 1. No tilting moment

Usually drill stands have only one drill column when used for working on stone. The design of this system means though that tilt forces work against the stand and the load on the suction cups is not equal.

The drill stand is also subject to distortion and this affects the gearwheel and bearing clearance. It also leads to something you don't want when drilling - canting.

You won't have problems like that with the GALESKI COMBINATOR double drill columns. Drilling occurs between the two columns, so these negative forces don't even exist (see fig. 1 and 2).

### 2. High-quality, consistent force transmission for drill feed

When you turn the feed lever on the GALESKI COMBINATOR, force transmission takes place along a through shaft on both gear racks. Again - no canting! (See fig. 1 and 3).

### 3. Light and manageable

In comparison to other drill stands on the market, the GALESKI COMBINATOR is compact, light, and manageable. The solid, and heavy (because of the tilt forces), center column is not necessary.

The GALESKI COMBINATOR is short and can be used where there is only little space.

### 4. Variability


The GALESKI COMBINATOR has many abilities and talents:

- Drill on the surface
- Drill on the stone edge (e.g. facade panels)
- Use your own drill
- Choose from 5 different GALESKI drill motors
- Use on smooth surfaces with suction cups
- Use on rough surfaces with VENTURI system
- Can be used with a wet vacuum cleaner
- Can be expanded and upgraded at any time.

SURFACE DRILLING STAND SYSTEM


## GALESKI COMBINATOR SOLO

**Fig. 1**  
Double column drill stand  
COMBINATOR

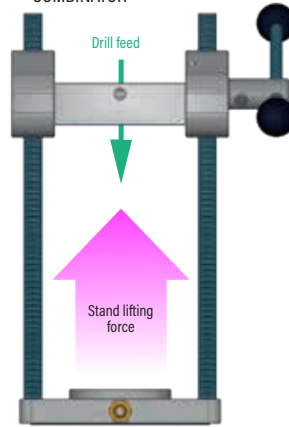


Force action when drilling:  
without tilting moment.

**Fig. 2**  
Single column drill stand

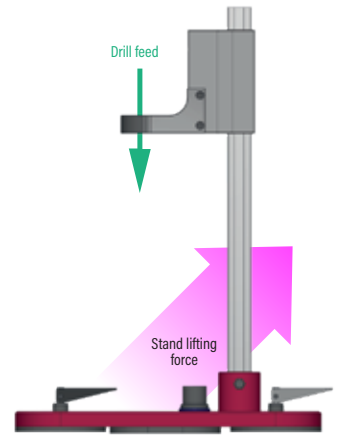

Force action when drilling:  
with tilting moment.

**Fig. 3**

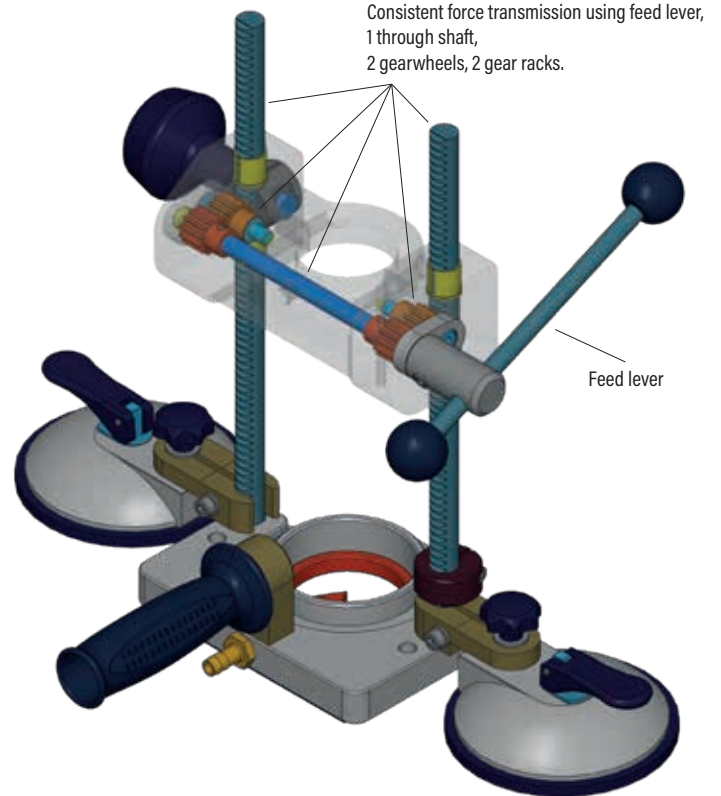

COMBINATOR SOLO // Surface drilling system without machine -wet-

W



Drill stand for surface drilling with suction cups for smooth surfaces, suitable for drilling motors up to Ø 53 mm machine holder (max. drill 150 mm or alternatively 230 mm).

#### Technical data

|                |              |
|----------------|--------------|
| Machine holder | max. Ø 53 mm |
| max. hole-Ø    | 70 mm        |
| Weight         | 3 kg         |

#### Included

Twin column drill stand with rubber coated base plate and water collecting system, handle, hose and adapter for water suction unit, 3 plastic splash guards with hole sizes Ø 22/40/68 mm, central point finder, 2 adjustable suction cups Ø 120 mm with clamp mounting to drill stand, 2 drill adapters M14 and R1/2", allen wrench 5 mm, carton.

#### Available versions

|                                   |
|-----------------------------------|
| COMBINATOR SOLO Drill lift 150 mm |
| COMBINATOR SOLO Drill lift 230 mm |

| Item no.    |
|-------------|
| 002.022.004 |
| 002.022.012 |

| Price net. |
|------------|
| 1,062.00 € |
| 1,094.00 € |

**COMBINATOR SOLO Plus** // Surface drilling system without machine -wet-

W



If you  
already  
own a  
machine:

Drill stand for surface drilling with suction cups for smooth surfaces, suitable for drilling motors up to Ø 53 mm machine holder (max. drill lift 150 mm or alternatively 230 mm).

**Technical data**

|                |              |
|----------------|--------------|
| Machine holder | max. Ø 53 mm |
| max. hole-Ø    | 107 mm       |
| Weight         | 4.4 kg       |

**Included**

Twin column drill stand - base plate with suction sealing lips, fully fitted Venturi unit, water collecting system, handle, hose and adapter for water suction unit, central point finder, 2 adjustable suction cups Ø 120 mm with clamp mounting to drill stand, 2 drill adapters M14 and R1/2", allen wrench 5 mm, carton.

**Available versions**

|                                        |
|----------------------------------------|
| COMBINATOR SOLO PLUS Drill lift 150 mm |
| COMBINATOR SOLO PLUS Drill lift 230 mm |

**Item no.**

|             |
|-------------|
| 002.022.056 |
| 002.022.057 |

**Price net.**

|            |
|------------|
| 1,279.00 € |
| 1,310.00 € |

**SURFACE DRILLING STAND SYSTEM**
**GALESKI COMBINATOR BASIC**

Shown without splash guard



The **COMBINATOR BASIC** has a water regulator valve and a water tap  
Simple to use when serial drilling  
(water distribution is adjusted once,  
then water is turned on/off with  
the tap).

Add-on module:  
**Vacuum suction plate.**



Add-on module:  
**Venturi set**


**• MANAGEABLE and COMPACT**
**• 2 model versions:**
**Combinator SPEED BASIC**

for surface drilling to Ø 30 mm at high speed.

**Combinator MAXI BASIC**

for surface drilling to Ø 70 mm with strong torque.

- Center point finder, hose and adapter to remove drill residue.
- With 2 suction cups for fastening to smooth surfaces.


**COMBINATOR SPEED Basic / COMBINATOR MAXI Basic** // Surface drilling system -wet-

W

Complete drill stand system: for drilling to Ø 30 mm (COMBINATOR SPEED Basic) and for drilling to Ø 70 mm (COMBINATOR MAXI Basic).  
With suction fastening cups for smooth surfaces (max. drill lift 150 mm or alternatively 230 mm).

**Included**

Drilling machine SPEED VARIO DI or MAXI VARIO DI:

Silicone connecting cable 4 m, personal protection switch PRCD, hose 2.5 m with brass quick coupling, water control valve and water tap, bail handle.

Twin column drill stand,:

with rubber coated base plate and water collecting system, handle, hose and adapter for water suction unit, 3 plastic splash guards with hole sizes Ø 22/40/68 mm, central point finder, 2 adjustable suction cups Ø 120 mm with clamp mounting to drill stand, 2 drill adapters M14 and R1/2", allen wrench 5 mm, carton.

| Technical data: | COMB. SPEED Basic | COMB. MAXI Basic  | Available versions                                     | Item no.    | Price net. |
|-----------------|-------------------|-------------------|--------------------------------------------------------|-------------|------------|
| Power           | 1,550 Watt        | 1,550 Watt        | COMBINATOR SPEED DI 230V (with PRCD) Drill lift 150 mm | 002.022.002 | 1,722.00 € |
| Voltage         | 230 Volt          | 230 Volt          | COMBINATOR SPEED DI 230V (with PRCD) Drill lift 230 mm | 002.022.019 | 1,753.00 € |
| Speed           | 2,700 - 9,500 rpm | 1,700 - 6,800 rpm | COMBINATOR MAXI DI 230V (with PRCD) Drill lift 150 mm  | 002.022.001 | 1,722.00 € |
| max. hole-Ø     | 30 mm             | 70 mm             | COMBINATOR MAXI DI 230V (with PRCD) Drill lift 230 mm  | 002.022.014 | 1,753.00 € |
| Spindle thread  | M14 u. R1/2"      | M14 u. R1/2"      |                                                        |             |            |
| Weight          | 7 kg              | 7 kg              |                                                        |             |            |

EDGE DRILL STAND SYSTEM

# GALESKI COMBINATOR FACADE



The **COMBINATOR FACADE** has a water regulator valve and a water tap. Simple to use when serial drilling (water distribution is adjusted once, then water is turned on/off with the tap).


▪ **PRECISE and ECONOMICAL** for drilling on facing edge, e.g. in facade panels (also possible to drill when facade panel is horizontal).

▪ Multiple stop system with pivotable and turnable rail for:

- 2 adjustable, different corner stops (180° pivotable).

- 360° rotatable rail to mirror the drill holes on the opposite side of the slab.

Result: Edge drills 1, 2, 3 and 4 on the facade panel can be made precisely and quickly (see photos below).

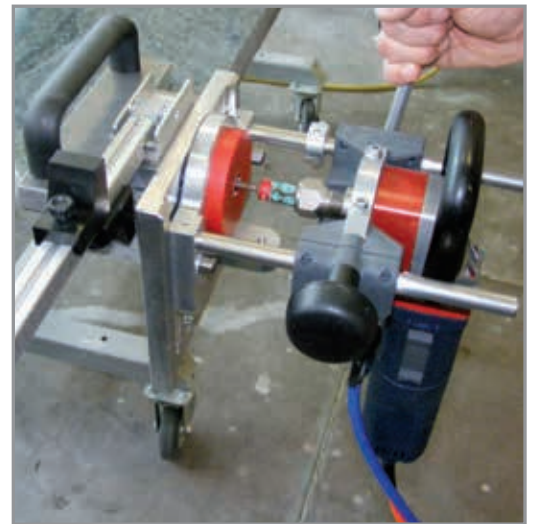

2 corner stops individually adjustable




180° pivotable



360° pivotable



For precise edge drilling 1, 2, 3 and 4

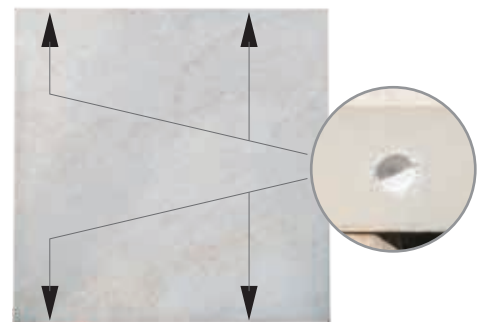

## COMBINATOR FACADE // Edge drilling system -wet-

W

Fully fitted edge drilling system for facade panels, has pivotable and turnable rail for exact edge distance (max. drill lift 150).

### Included

Drilling machine SPEED VARIO DI:

Silicone connecting cable 4 m, personal protection switch PRCD, hose 2.5 m with brass quick coupling, water control valve, bail handle.

Twin column drill stand:

with rubber coated base plate and water collecting system, angle clamping unit for facade panels, 1 plastic splash guard with hole sizes Ø 22 mm, 2 drill adapters M14 and R1/2", allen wrench, wrench size 13 mm, carton.

| Technical data: | COMBINATOR FACADE  | Available versions                                      | Item no.    | Price net. |
|-----------------|--------------------|---------------------------------------------------------|-------------|------------|
| Power           | 1,550 Watt         | COMBINATOR FACADE DI 230V (with PRCD) Drill lift 150 mm | 002.022.008 | 2,216.00 € |
| Voltage         | 230 Volt           |                                                         |             |            |
| Speed           | 2,700 - 9,500 rpm. |                                                         |             |            |
| Max. hole-Ø     | 30 mm              |                                                         |             |            |
| Spindle thread  | M14 u. R1/2"       |                                                         |             |            |
| Weight          | 7 kg               |                                                         |             |            |

## SURFACE AND EDGE DRILL STAND SYSTEM

**GALESKI COMBINATOR UNIVERSAL**

- **MANAGEABLE** and **COMPACT**
- Completely equipped for surface drilling (to Ø 70 mm) and edge drilling (e.g. for facade panels).
- Center point finder, hose, and adapter to remove drill residue.
- Extension options for surface drilling:
  - **Vacuum suction plate:** to attach the drill stand to rough surfaces. Connection to a vacuum pump.
  - **Vacuum suction plate with VENTURI unit:** to attach the drill stand to rough surfaces. Vacuum suction plate with extra VENTURI vacuum generator for connecting to compressed air coupling.

 Add-on module:  
**Vacuum suction plate**

 Add-on module:  
**Venturi set**
**COMBINATOR UNIVERSAL** // Surface and edge drilling system -wet-**W**

Universal drill stand system for drilling to Ø 70 mm with suction fasteners for smooth surfaces and additional angle clamping unit for vertical drilling in facing edge/slab edges. With pivotable and rotatable rail for exact edge distance (max. drill lift 150 mm or alternatively 230 mm).

**Included**

Drilling machine MAXI VARIO DI:

Silicone connecting cable 4 m, personal protection switch PRCD, hose 2.5 m with brass quick coupling, water control valve, bail handle.

Twin column drill stand:

with rubber coated base plate and water collecting system, handle, angle clamping unit for facade panels, hose and adapter for water suction unit, 3 plastic splash guards with hole sizes Ø 22/40/68 mm, central point finder, 2 adjustable suction cups Ø 120 mm with clamp mounting to drill stand, 2 drill adapters M14 and R1/2", allen wrench, wrench size 13 mm, carton.

| Technical data: | COMBINATOR UNIVERSAL | Available versions                                         | Item no.    | Price net. |
|-----------------|----------------------|------------------------------------------------------------|-------------|------------|
| Power           | 1,550 Watt           | COMBINATOR UNIVERSAL DI 230V (with PRCD) Drill lift 150 mm | 002.022.003 | 2,360.00 € |
| Voltage         | 230 Volt             | COMBINATOR UNIVERSAL DI 230V (with PRCD) Drill lift 230 mm | 002.022.020 | 2,390.00 € |
| Speed           | 1,700 - 6,800 rpm.   |                                                            |             |            |
| max. hole-Ø     | 70 mm                |                                                            |             |            |
| Spindle thread  | M14 u. R1/2"         |                                                            |             |            |
| Weight          | 7 kg                 |                                                            |             |            |

SURFACE DRILLING STAND SYSTEM

**GALESKI**

**COMBINATOR POLIFOX 1700 PLUS**  
**COMBINATOR JOKER MAXI-2 PLUS**

• COMPACT and STRONG

• 3 model versions:

**Combinator POLIFOX 1700 PLUS**

for surface drilling to Ø 107 mm with strong torque.

**Combinator JOKER MAXI-2 PLUS**

for surface drilling to Ø 80 mm at high speed.

• Base plate with large drilling opening.

• 2 suction holders for fastening to smooth surfaces.

• Additionally with VENTURI system.

• Center point finder



**COMBINATOR POLIFOX 1700 PLUS / COMBINATOR JOKER MAXI-2 PLUS // Surface drilling system -wet-**

**W**

Complete drill stand system: for drilling holes Ø 4 - 80 mm (COMBINATOR JOKER MAXI-2 PLUS) and for drilling Ø 20 - 107 mm (COMBINATOR POLIFOX 1700 PLUS). With suction fastening for smooth surfaces and fitted Venturi system for rough surfaces (max. drill lift 150 mm or alternatively 230 mm).

**Included**

Drilling machine POLIFOX 1700 VARIO DI or JOKER MAXI-2 VARIO DI:

Silicone connecting cable 4 m, personal protection switch PRCD, hose 2.5 m with brass quick coupling, water control valve, splash guard, bail handle.

Twin column drill stand,:

Base plate with suction sealing lips, fully fitted Venturi unit, water collecting system, handle, hose and adapter for water suction unit, central point finder, 2 adjustable suction cups Ø 120 mm with clamp mounting to drill stand, 2 drill adapters M14 and R1/2", allen wrench, carton.

| Technical data: | COMB. POLIFOX 1700 PLUS | COMB. JOKER MAXI-2 PLUS | Available versions                                                 | Item no.    | Price net. |
|-----------------|-------------------------|-------------------------|--------------------------------------------------------------------|-------------|------------|
| Power           | 1,750 Watt              | 1,750 Watt              | COMBINATOR POLIFOX 1700 PLUS DI 230V (with PRCD) Drill lift 150 mm | 002.022.050 | 1,882.00 € |
| Voltage         | 230 Volt                | 230 Volt                | COMBINATOR POLIFOX 1700 PLUS DI 230V (with PRCD) Drill lift 230 mm | 002.022.051 | 1,913.00 € |
| Speed           | 800 - 3,600 rpm.        | 1,700 - 6,800 rpm.      | COMBINATOR JOKER MAXI-2 PLUS DI 230V (with PRCD) Drill lift 150 mm | 002.022.052 | 1,959.00 € |
| max. hole-Ø     | 20 - 107 mm             | 4 - 80 mm               | COMBINATOR JOKER MAXI-2 PLUS DI 230V (with PRCD) Drill lift 230 mm | 002.022.053 | 1,990.00 € |
| Spindle thread  | M14 u. R1/2"            | M14 u. R1/2"            |                                                                    |             |            |
| Weight          | 9 kg                    | 9 kg                    |                                                                    |             |            |

SURFACE DRILLING STAND SYSTEM

**GALESKI****COMBINATOR DIAMOND 1700 PLUS**

**STRONG** with plenty of power reserves for continuous running.

**Combinator DIAMOND 1700 PLUS**

for surface drilling to 107 mm or freehand drilling to Ø 132 mm.

- Base plate with suction sealing lips and fitted Venturi system for drilling on rough surfaces
- 2 suction fasteners for fixing to smooth surfaces
- Base plate with large drilling opening (Ø 109 mm)
- Center point finder

Drill motor with:

- mechanical safety coupling
- electronic soft start
- overload cut-off and temperature control
- locking button for on/off switch with protection against unintentional fixing

**COMBINATOR DIAMOND 1700 PLUS // Surface drilling system W**

Complete drill stand system: for drilling Ø 20 - 107 mm.

With suction fastening for smooth surfaces and fitted Venturi system for rough surfaces (max. drill lift 150 mm or alternatively 230 mm).

**Included**

Drilling machine DIAMOND 1700 VARIO DI:

Silicone connecting cable 4 m, personal protection switch PRCD, water rinsing head, water tap, hose with brass quick coupling.

Twin column drill stand,:

Base plate with suction sealing lips, fully fitted Venturi unit, water collecting system, handle, hose and adapter for water suction unit, central point finder, 2 adjustable suction cups Ø 120 mm with clamp mounting to drill stand, Drill adapter M14 inner, R1/2" inner for drills with R1/2" outer, allen wrench, carton.

| Technical data                                                    | COMB. DIAMOND 1700 PLUS |            |  |
|-------------------------------------------------------------------|-------------------------|------------|--|
| Power                                                             | 1,700 Watt              |            |  |
| Voltage                                                           | 230 Volt                |            |  |
| Gearbox                                                           | 2 speeds                |            |  |
| Speed 1. Gang                                                     | 1,500 rpm               |            |  |
| Speed 2. Gang                                                     | 3.000 rpm               |            |  |
| Max. hole-Ø                                                       | 20-107 mm               |            |  |
| Spindle thread                                                    | M18                     |            |  |
| Weight                                                            | 11.8 kg                 |            |  |
|                                                                   |                         |            |  |
| Available versions                                                | Item no.                | Price net. |  |
| COMBINATOR DIAMOND 1700 DI 230 V<br>(with PRCD) Drill lift 150 mm | 002.022.054             | 2,378.00 € |  |
| COMBINATOR DIAMOND 1700 DI 230 V<br>(with PRCD) Drill lift 230 mm | 002.022.055             | 2,409.00 € |  |

**One-off module version:** the GALESKI COMBINATOR can also be put together exactly as you require.



| Pos.                      | Description                                                                                                                                                                                                                                                                                                                                                                    | Item No.    | Price €  |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----------|
| <b>Wet - Drill System</b> |                                                                                                                                                                                                                                                                                                                                                                                |             |          |
|                           |                                                                                                                                                                                                                                                                                                                                                                                |             | <b>W</b> |
| 1                         | <b>COMBINATOR basic system (drill stroke max. 150 mm)</b><br>Twin column drill stand: with rubber-coated base plate, water-collecting system for drilling to 70 mm, and handle. Suitable for drill motors with up to Ø 53 mm machine holder.                                                                                                                                   | 002.022.021 | 842.00   |
| 2                         | <b>COMBINATOR basic system (drill stroke max. 230 mm)</b><br>Twin column drill stand: with rubber-coated base plate, water-collecting system for drilling to 70 mm, and handle. Suitable for drill motors with up to Ø 53 mm machine holder.                                                                                                                                   | 002.022.022 | 865.00   |
| 3                         | <b>COMBINATOR basic system PLUS (drill stroke max. 150 mm)</b><br>Twin column drill stand: base plate with suction sealing lips and fitted Venturi system, water-collecting system for drilling to 107 mm, and handle. Suitable for drill motors with up to Ø 53 mm machine holder.                                                                                            | 002.022.035 | 1,066.00 |
| 4                         | <b>COMBINATOR basic system PLUS (drill stroke max. 230 mm)</b><br>Twin column drill stand: base plate with suction sealing lips and fitted Venturi system, water-collecting system for drilling to 107 mm, and handle. Suitable for drill motors with up to Ø 53 mm machine holder.                                                                                            | 002.022.036 | 1,088.00 |
| 5                         | <b>COMBINATOR SOLO 15 PLUS Vacuum pump (drill stroke max. 150 mm)</b><br>Twin column drill stand: base plate with suction sealing lips, Connection for operation with vacuum pump, water-collecting system for drilling to 107 mm, and handle. Suitable for drill motors with up to Ø 53 mm machine holder.                                                                    | 002.022.041 | 1,023.00 |
| 6                         | <b>COMBINATOR SOLO 23 PLUS Vacuum pump (drill stroke max. 230 mm)</b><br>Twin column drill stand: base plate with suction sealing lips, Connection for operation with vacuum pump, Water-collecting system for drilling to 107 mm, and handle. Suitable for drill motors with up to Ø 53 mm machine holder.                                                                    | 002.022.042 | 1,046.00 |
| 7                         | <b>Machine holder - Reduction</b><br>Outer Ø 53 mm, Inner Ø 43 mm; (Other reductions on request)                                                                                                                                                                                                                                                                               | 029.475     | 50.00    |
| 8                         | <b>Angle Clamping Unit for facade panels</b><br>Mounted to the base plate with two screws, it is suitable for drilling into the front of facade panels. Maximal clamping thickness: 12 cm. A pivotable and rotatable rail with 2 adjustable stops helps to set the hole at the exact distance to the edge. Adjustable center point for drilling in different slab thicknesses. | 002.022.007 | 672.00   |
| 9                         | <b>Vacuum Suction Plate</b><br>Mount to the drill stand. Connect with a vacuum pump. For use on rough surfaces.                                                                                                                                                                                                                                                                | 002.022.011 | 156.00   |
| 10                        | <b>Vacuum Suction Plate with Venturi unit</b><br>Mount to the drill stand. Vacuum suction plate with separate Venturi vacuum generator to connect to compressed air coupling. For use on rough surfaces.                                                                                                                                                                       | 002.022.010 | 234.00   |
| 11                        | <b>Adjustable Suction Cups, for smooth surfaces</b><br>2 adjustable suction cups Ø 120 mm with clamp mounting to drill stand.                                                                                                                                                                                                                                                  | 002.022.024 | 170.00   |
| 11                        | <b>Suction cups. 1 only, Ø 120 mm without clamp mounting.</b>                                                                                                                                                                                                                                                                                                                  | 100.420A    | 85.00    |



|           |                                                                                                                                                                                                                                                                           |             |          |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----------|
| 12 bis 17 | <b>Extras, complete</b> (for COMBINATOR basic system)<br>hose and adapter for water suction unit, 3 plastic splash guards with hole sizes Ø 22/40/68 mm, 1 drill holder R1/2", 1 drill adapter M14, 1 allen wrench 5 mm, central point finder, small.                     | 002.022.023 | 107.00   |
| 12        | <b>Hose and adapter</b> Extractor hose for water suction unit                                                                                                                                                                                                             | 100.439A    | 28.00    |
| 13        | <b>Allen wrench</b> size: 5 mm                                                                                                                                                                                                                                            | 000.514     | 3.00     |
| 14        | <b>Drill Holder</b> M14 inner, R1/2" inner for drills with R1/2" outer                                                                                                                                                                                                    | 028.206     | 25.00    |
| 15        | <b>Drill adapter</b> M14 outer, M14 inner for more drilling depth                                                                                                                                                                                                         | 006.152     | 39.00    |
| 16        | <b>Plastic splash guards</b> 1 only, with drill opening, please indicate Ø.                                                                                                                                                                                               | 150.007.022 | 9.00     |
| 17        | <b>Central Point Finder small</b> for COMBINATOR basic system                                                                                                                                                                                                             | 002.022.016 | 18.00    |
| 18        | <b>Central Point Finder large</b> for COMBINATOR basic system PLUS                                                                                                                                                                                                        | 002.022.034 | 19.00    |
| 19        | <b>Handle</b> for COMBINATOR Basic                                                                                                                                                                                                                                        | 100.753A    | 6.00     |
| 20        | <b>Drill Holder</b> R1/2" outer x M14 outer (for Diamond 1700)                                                                                                                                                                                                            | 028.214     | 24.00    |
| 21        | <b>Drilling motor JOKER MAXI/2 VARIO DI</b><br>1,750 Watt, 230 Volt, 1,700 - 6,800 rpm, for drills to Ø 80 mm.<br>Included: silicone connecting cable 4 m, water hose 2.5 m with brass quick coupling, bail handle, personal protection switch PRCD, splash guard.        | 001.003.035 | 649.00   |
| 22        | <b>Drilling motor POLIFOX 1700 VARIO DI</b><br>1,750 Watt, 230 Volt, 800 - 3,600 rpm, for drills to Ø 107 mm.<br>Included: silicone connecting cable 4 m, water hose 2.5 m with brass quick coupling, bail handle, personal protection switch PRCD, splash guard.         | 004.003.150 | 699.00   |
| 23        | <b>Drilling motor DIAMOND 1700 DI</b><br>1,700 Watt, 230 Volt, 1st gear 1,500 rpm, 2nd gear 3,000 rpm, for drills to Ø 107 mm<br>Included: silicone connecting cable 4 m, personal protection switch PRCD, water rinsing head, water tap, hose with brass quick coupling. | 036.143     | 1,184.00 |

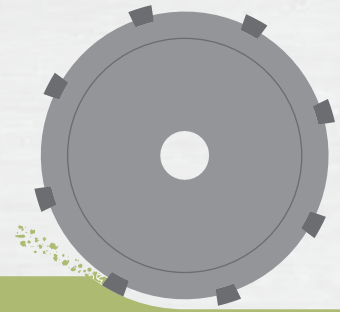
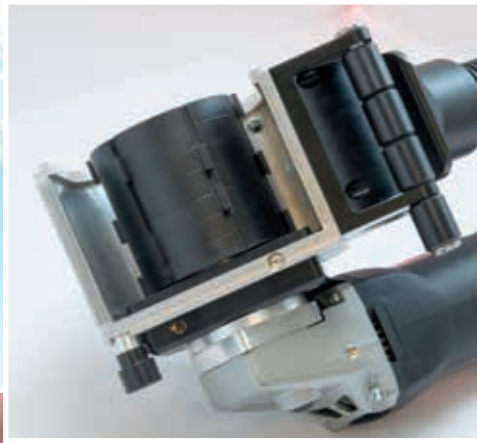
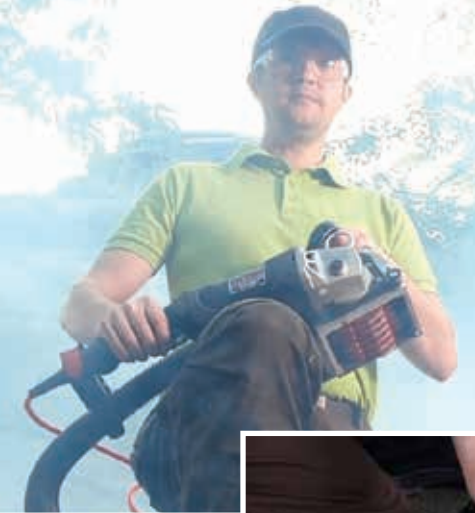


Image similar

## GALESKI-Hand milling cutter

# ATLAS PRO 82 BL

### Technical data:

|                     |            |                     |          |
|---------------------|------------|---------------------|----------|
| Voltage:            | 230 Volt   | Working depth:      | 0 - 8 mm |
| Power:              | 1,400 Watt | Spindle thread:     | M 14     |
| Speed:              | 6,400 rpm  | Weight:             | 4.0 kg   |
| Working width max.: | 82 mm      | Soft start          |          |
| Tool Ø max.:        | 98 mm      | Overload protection |          |

► **Material removal accurately defined:**

**1 - 2 - 3 - 4 - 5 mm**

► **Designed for low dust level**

GALESKI-Hand milling cutter

**ATLAS  
MAX 82/2**

*The hand milling machines are designed for the removal of hard stone, tile adhesives, coatings, fillers, solid and tough-elastic adhesives, paints, plasters.*

*Toxic materials such as PCB, asbestos or bitumen (PAH applications) may only be processed by specially trained personnel for the purpose of remediation.*

**Technical data:**

|                     |            |                     |           |
|---------------------|------------|---------------------|-----------|
| Voltage:            | 230 Volt   | Working depth:      | 0 - 10 mm |
| Power:              | 1.790 Watt | Spindle thread:     | M 14      |
| Speed:              | 7.000 rpm  | Weight:             | 5.6 kg    |
| Working width max.: | 82 mm      | Soft start          |           |
| Tool Ø max.:        | 98 mm      | Overload protection |           |

## GALESKI-Hand milling cutter

**ATLAS PRO 82 BL**

**ATLAS MAX 82/2**

and the principle  
**DRUM MILLING !**

### ► Accurately defined removal

When grinding with the typical back and forth work movements, it is sometimes difficult to produce an exact, even, flat surface. Sometimes there is too much material removal - sometimes too little.

The principle of "drum milling" is different.

Before starting work, you decide how much material to remove in one pass: 1, 2, 3 or up to 10 mm. Drum milling in conjunction with precise depth adjustment (ATLAS PRO: 0 - 8mm, ATLAS MAX/2: 0 - 10 mm) enable precisely defined stock removal per pass.

Even when removing viscoplastic adhesives, fillers, etc., there is no smearing of the tough surface with the underlying stone.

### ► Very low dust due to design

By rotating the drums, the material is precisely flung into the directly adjacent extraction system. This enables us to achieve significantly better suction results.

This is especially important when removing toxic surfaces such as asbestos, PCB and bitumen (PAH applications) by specially trained personnel.




### ► Work more efficiently and save time

In conjunction with the PCD milling drum, the surface is peeled off (no grinding). You will notice that the usual work goes much faster by hand.

### ► Application

Remediators and pollutant cleanup - Painters and plasterers - Interior finishes - Floor renovators etc.

Here you can see a small selection of the possible surfaces to be machined ...

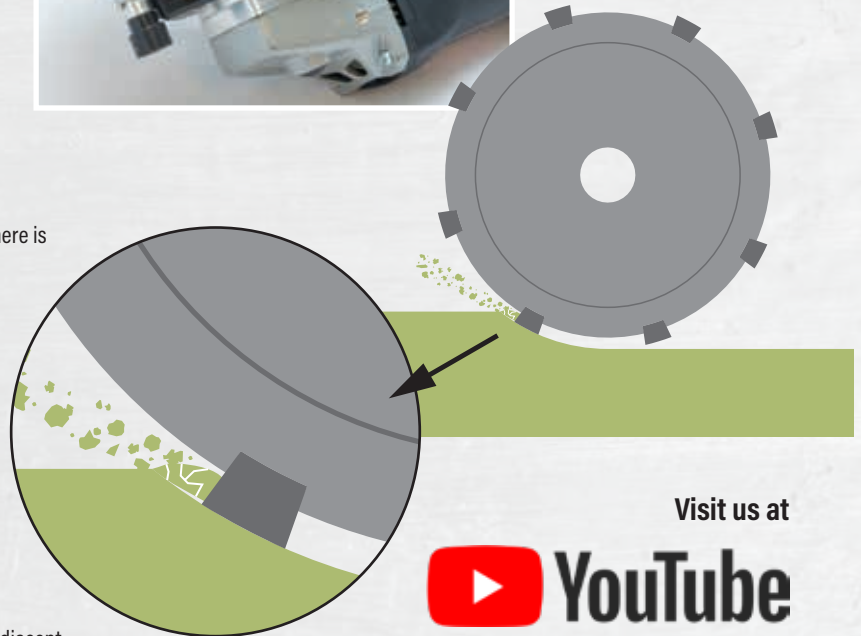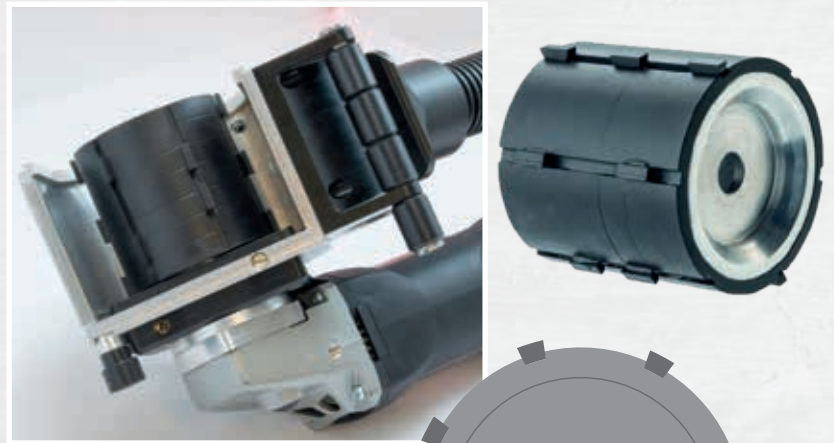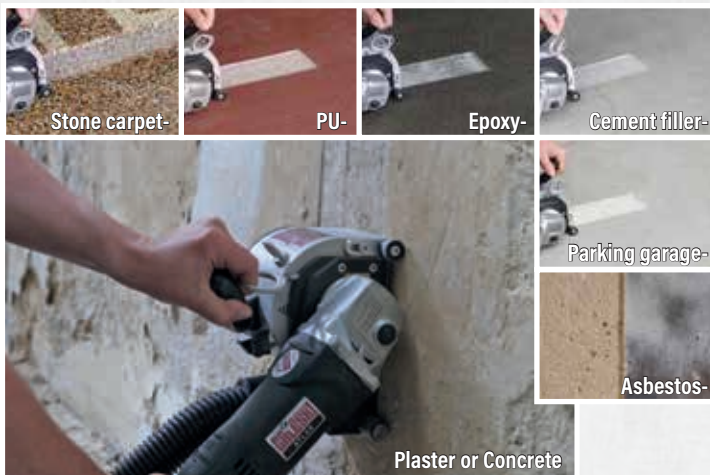

Visit us at



Variable infeed depth of GALESKI ATLAS machines:

**Surface**  
**thin scrape off** or **deep peel**



When milling, the depth removal is determined by the infinitely variable depth setting of the machine.  
The machined stone surface will therefore be - precisely defined - more uniform.

**Difference**  
**MILLING - GRINDING:**

In grinding, the depth of stock removal per pass is determined by the contact pressure on the machine and the hardness of the grinding substrate.

**Grinding**




## GALESKI-Hand milling cutter

**ATLAS MAX 82/2**

## ► Near wall/near floor milling

On the ATLAS MAX 82/2, during the pulling work process, it is possible to gradually adjust the machine body from the horizontal to the vertical position and beyond (over 150° steplessly or in 12 grid positions).

This makes it possible to work close to the wall (or floor).

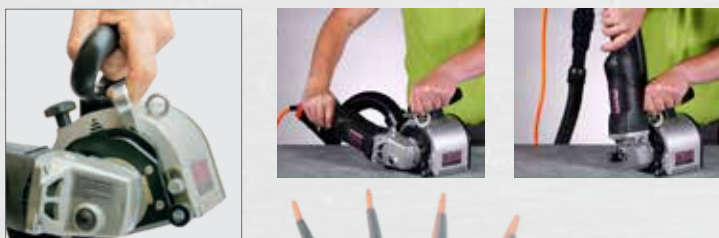

Now also as compressed  
air milling cutter

New  
possibilities!

**AIR ATLAS PRO/MAX**

A new generation of pneumatic machine with an excellent ratio of size to power!

AIR ATLAS MAX is EXTRA STRONG and SUPER HANDY!

- Great for precision work
- Full power for rough work
- Robust, yet compact
- Comfortable and safe work
- Perfected silencer technology
- Air return to the rear

Technical data and Info on page 26



ATLAS MAX 82-2 // Hand milling cutter

D



Most powerful motor and high-quality gearbox for robust continuous operation. Very low dust levels due to design. Adjustable position of the machine body to the milling drum (up to 150°) for working close to walls/floors.

| Technical data |            | Working width max. | 82 mm  | Included<br>Silicon connecting cable 4 m, protection hood with dust extraction hose, connector to vacuum cleaner, twin hole wrench, Clamping nut with locking screw, 6 mm allen wrench, case. |
|----------------|------------|--------------------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power          | 1,790 Watt | Tool Ø             | 98 mm  |                                                                                                                                                                                               |
| Voltage        | 230 Volt   | Tool holder        | M14    |                                                                                                                                                                                               |
| Speed          | 7,000 rpm  | Weight             | 5.6 kg |                                                                                                                                                                                               |
| Working depth  | 0 - 10mm   |                    |        |                                                                                                                                                                                               |

Available versions  
ATLAS MAX 82/2, 230V


Item no.  
003.036.802

Price net.  
2.069.00 €

## MILLING DRUMS - ideally matched for ATLAS PRO 82 BL and ATLAS MAX 82/2

Soft bond • segment height 5 mm • 33 diamond segments grit 30/40 • working width 82 mm

**D**



**D**

| Designation / Description                     | Price € | Item no.    | Designation / Description                       | Price € | Item no.    |
|-----------------------------------------------|---------|-------------|-------------------------------------------------|---------|-------------|
| Standard - shape<br>for high and fast removal | 584.00  | 150.010.204 | Helix - shape<br>for smooth, low-vibration work | 584.00  | 150.010.207 |


### Diamond blue

#### APPLICATION AREAS

- Coatings < 2mm
- Concrete
- Old concrete
- Hard-grain flooring
- Power-floated, smoothed floor
- Mineral flooring
- Plaster
- Terrazzo

Medium bond • segment height 5 mm • 33 diamond segments grit 30/40 • working width 82mm

**D**



**D**

| Designation / Description                     | Price € | Item no.    | Designation / Description                       | Price € | Item no.    |
|-----------------------------------------------|---------|-------------|-------------------------------------------------|---------|-------------|
| Standard - shape<br>for high and fast removal | 584.00  | 150.010.205 | Helix - shape<br>for smooth, low-vibration work | 584.00  | 150.010.208 |

### Diamond red

#### APPLICATION AREAS

- Coatings < 2mm
- Concrete
- Old concrete
- Screed
- Power-floated, smoothed floor
- Mineral flooring
- Plaster
- Terrazzo

Hard bond • segment height 5 mm • 33 hybrid segments, Dia & PCD-grit • working width 82mm

**D**



**D**

| Designation / Description                     | Price € | Item no.    | Designation / Description                       | Price € | Item no.    |
|-----------------------------------------------|---------|-------------|-------------------------------------------------|---------|-------------|
| Standard - shape<br>for high and fast removal | 636.00  | 150.010.206 | Helix - shape<br>for smooth, low-vibration work | 636.00  | 150.010.209 |

### Hybrid grey

#### APPLICATION AREAS

- Coatings < 2mm
- Coatings > 2mm
- Sealings
- Paints
- Asphalt
- Mastic asphalt
- Glue residues, hard
- Filling compounds
- Leveling compounds
- Stone carpet

We are happy to supply also special drums, especially for your applications.

Both a different allocation and different segment heights are possible.

SPECIAL MILLING DRUM  
e.g. for milling joints

SPECIAL MILLING DRUM  
e.g. with wider PCD's



SPECIAL MILLING DRUM  
e.g. for milling wood



14 shaped PCD cutting pieces • working width 82mm



**D**

| Designation / Description | Price € | Item no.    |
|---------------------------|---------|-------------|
| Standard - shape          | 698.00  | 150.010.201 |

### PCD black

#### APPLICATION AREAS

- Coatings < 2mm
- Coatings > 2mm
- Sealings
- Paints
- Plaster
- Asphalt
- Mastic asphalt
- Glue residues, soft
- Glue residues, hard
- MMA
- OS11/OS8
- Wallpaper

Medium bond • segment height 10 mm • 33 diamond segments grit 30/40 • working width 82mm

**D**



| Designation / Description                             | Price € | Item no.    |
|-------------------------------------------------------|---------|-------------|
| Ribbed - shape<br>for markings and fast work progress | 669.00  | 150.010.214 |

### Diamond green

#### APPLICATION AREAS

- Groove milling < 10 mm
- Concrete
- Old concrete
- Smoothed concrete
- Mineral flooring
- Plaster
- Terrazzo

# A CHALLENGING STONE EDGE:



... we'll give you a hand!

Whatever you want to do to the edge - milling, grinding, polishing, making a groove, profiling:

Use our **CONTOUR CAT KS 80/4** and a **perfectly sorted set of tools** to work manually on the edge for a professional job.

Discover all the possible ways to use this compact, ingenious machine.

## GALESKI CONTOUR CAT

### Professional Stone Edge Processing



#### CONTOUR CAT KS 80/4 // Edge processing system W

One machine for many different jobs: milling, grinding, polishing, making grooves, profiling.

##### Technical data

|                      |                   |
|----------------------|-------------------|
| Power                | 1,750 Watt        |
| Voltage              | 230 / 115 Volt    |
| Speed                | 1,700 - 6,800 rpm |
| Grinding height max. | 60 mm             |
| Spindle thread       | M14               |
| Weight               | 6.5 kg            |

##### Included

Silicone connecting cable 4 m, inner and outer water feeding, hose 2.5 m with brass quick coupling, wrench size 24/27 mm, knob handle, personal protection switch PRCD or CEE-plug, case.

##### Available versions

|                                                |
|------------------------------------------------|
| CONTOUR CAT KS 80/4 DI 230V (with PRCD)        |
| CONTOUR CAT KS 80/4 CEE 230V (for transformer) |
| CONTOUR CAT KS 80/4 DI 115V (with PRCD)        |
| CONTOUR CAT KS 80/4 CEE 115V (for transformer) |

| Item no.    | Price net. |
|-------------|------------|
| 001.000.107 | 1,695.00 € |
| 001.000.106 | 1,655.00 € |
| 001.000.111 | 1,695.00 € |
| 001.000.105 | 1,655.00 € |




### GADIA OSCILLATOR (patented)

Cylinder holder for a streak-free polish • only for CONTOUR CAT

More info / prices:  
page 64

The patented tool holder combines a horizontal turning movement with a vertical lifting movement. The sine curve movement gives you a streak-free polish on curved stone edges.

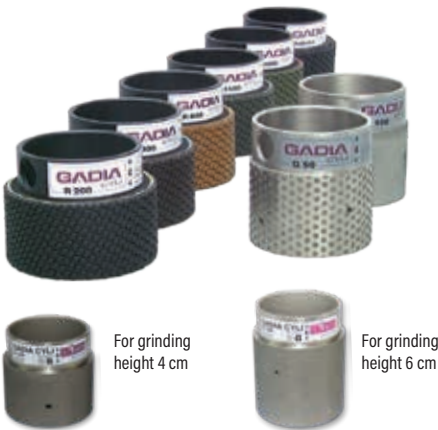

### GADIA CYLI

Grinding and polishing cylinders

More info / prices:  
page 64

Perfect results on marble and granite:

- Use GADIA OSCILLATOR for perfect, streak-free, and accurate stone edges.
- The grit of each cylinder in the series is practice-oriented, just ideal.



### GADIA DISC

Groove Cutter

More info / prices:  
page 65

- Cover glue joints by inserting brass or stainless steel inlets in kitchen tops or stairs ("2+2" and "3+3")
- Mounting and attaching stone in wood or metal frames, e.g. tables
- Make inlet grooves accurately and quickly, even on a curved edge. Use with GADIA CONNECT for perfect joints.



### GADIA CONNECT

Perfect connections

More info / prices:  
page 65

Use GADIA CONNECT plastic chips for flush to surface connections.

GADIA DISC sets the grooves at the exact distance from the surface, then the chips are glued in place.

Use the GADIA CONNECT template and GADIA CYLI grinders to make accurate corner connections with exactly fitting profiles.



**GADIA TRIM**

Work on the bottom edge of stone

More info / prices: page 65

- Inaccuracies in slab thickness at the joint are calibrated.
- For clean bottom edges, e.g. for projecting kitchen worktops, visible bottom edge of a step.
- Front cuts to reduce the thickness of the visible edge.

*Cutting disk is not included in the delivery*Two different ways to assemble  
GADIA EDGE 45°.**GADIA EDGE 45°**

make chamfers with small radii

More info / prices: page 65

- Make 45° chamfers on the top and bottom of cut-outs in a stone slab without having to turn the work piece.
- For narrow chamfers, 3 spacer sizes make the best use of the complete grinding surface on the tool.
- Central water feeding gives you a good view of the grinding edge and doesn't hinder your work.
- Particularly suitable for chamfers up to a width of 5 mm.

**GADIA ROUTER**

Lower the edge

More info / prices: page 65

- For inserting hotplates or wash basins.
- Use the GADIA ROUTER to easily make exact slots up to 20 mm.

**GADIA PROFILE**

Profiling


More info / prices: page 65

- Sintered diamond grinder with spacer for exact grinding depth.



|   | Designation                                 | Description                                                                                                           | Item No. | Price € |
|---|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|----------|---------|
| 1 | (1) <b>GADIA OSCILLATOR</b> cylinder holder | Cylinder holder with vertical oscillation movement, M14 connection (Tool holder for GADIA CYLI)<br>for CONTOUR CAT    | 000.004  | 405.00  |
| 2 | (2) <b>GADIA RS</b> cylinder holder         | Cylinder holder without vertical lifting movement; connection R1/2" (Tool holder for GADIA CYLI)                      | 000.014  | 359.00  |
| 3 | (3) Distancing Wheel Set, 2 pieces          | to grind edges using a template (for GADIA OSCILLATOR and GADIA RS cylinder holder, using G50 + G100 CYLIS), M8 screw | 000.578  | 173.00  |
| 4 | (4) Adapter                                 | R1/2" outer x M14 outer                                                                                               | 028.214  | 24.00   |

|          | Designation            | Description                                                                                                                                           | Grit / Phase                                | Item No. | Price €  |
|----------|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|----------|----------|
| <b>W</b> | <b>GADIA CYLI 4 cm</b> | Diamond grinding and polishing cylinders 4 cm for granite and marble.<br><br>G50 & G100 = electroplated metal bond<br><br>R200 bis R3000 = resin bond | G50 / Pre-miller coarse                     | 000.390  | 398.00   |
|          |                        |                                                                                                                                                       | G100 / Pre-miller fine                      | 000.391  | 339.00   |
|          |                        |                                                                                                                                                       | R200 / Grinder                              | 000.321  | 115.00   |
|          |                        |                                                                                                                                                       | R400 / Grinder                              | 000.322  | 115.00   |
|          |                        |                                                                                                                                                       | R800 / Grinder                              | 000.323  | 115.00   |
|          |                        |                                                                                                                                                       | R1500 / Grinder                             | 000.324  | 115.00   |
|          |                        |                                                                                                                                                       | R3000 / Pre-polisher                        | 000.325  | 115.00   |
|          |                        |                                                                                                                                                       | Polisher                                    | 000.326  | 115.00   |
|          |                        |                                                                                                                                                       | Special set price: (G50 - polisher) 1 each  | 000.329  | 1,260.00 |
| <b>W</b> | <b>GADIA CYLI 6 cm</b> | Diamond grinding and polishing cylinders 6 cm for granite and marble.<br><br>G50 & G100 = electroplated metal bond<br><br>R200 bis R3000 = resin bond | G50 / Pre-miller coarse                     | 000.336  | 529.00   |
|          |                        |                                                                                                                                                       | G100 / Pre-miller fine                      | 000.337  | 499.00   |
|          |                        |                                                                                                                                                       | R200 / Grinder                              | 000.330  | 163.00   |
|          |                        |                                                                                                                                                       | R400 / Grinder                              | 000.331  | 163.00   |
|          |                        |                                                                                                                                                       | R800 / Grinder                              | 000.332  | 163.00   |
|          |                        |                                                                                                                                                       | R1500 / Grinder                             | 000.333  | 163.00   |
|          |                        |                                                                                                                                                       | R3000 / Pre-polisher                        | 000.334  | 163.00   |
|          |                        |                                                                                                                                                       | Polisher                                    | 000.335  | 163.00   |
|          |                        |                                                                                                                                                       | Special set price: (G50 - polisher) 1 each  | 000.338  | 1,878.00 |
| <b>W</b> | <b>GADIA CYLI 4 cm</b> | Diamond grinding and polishing cylinders 4 cm for Engineer Stone<br><br>Q200 bis Q3000 = resin bond                                                   | Q200 / Grinder                              | 000.392  | 122.00   |
|          |                        |                                                                                                                                                       | Q400 / Grinder                              | 000.393  | 122.00   |
|          |                        |                                                                                                                                                       | Q800 / Grinder                              | 000.394  | 122.00   |
|          |                        |                                                                                                                                                       | Q1500 / Grinder                             | 000.395  | 122.00   |
|          |                        |                                                                                                                                                       | Q3000 / Grinder                             | 000.396  | 122.00   |
|          |                        |                                                                                                                                                       | Polisher                                    | 000.397  | 122.00   |
|          |                        |                                                                                                                                                       | Special set price: (Q200 - polisher) 1 each | 000.399  | 680.00   |

|                                              | Designation                                                                                                                                                                                                   | Description                                                                                                                                                                                                               | Item No. | Price € |
|----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|---------|
| W                                            | <br><b>GADIA DISC Set</b> , for milling grooves                                                                              | <br>Diamond groove cutter Ø 80 mm x 5 mm, Adapter M14 x M8, hexagonal socket screw M8 and 2 distancing wheels for 10 mm and 15 mm depth. | 000.530  | 415.00  |
|                                              | Grooving head, 1 pcs.                                                                                                                                                                                         | Grooving head, Ø 80 mm x 5 mm                                                                                                                                                                                             | 000.531  | 258.00  |
| W                                            | <br><b>GADIA TRIM Set</b> for stone slab thickness 1-2 cm. For calibrating the slab thickness at slab outer and lower edges. | Adapter M14xM8, distance wheel, distance ring, 1 fitting screw, supporting rings.                                                                                                                                         | 000.588A | 128.00  |
|                                              | <b>GADIA TRIM Set</b> for stone slab thickness 3-4 cm. For calibrating the slab thickness at slab outer and lower edges.                                                                                      | Adapter M14xM8, distance wheel, distance ring, 1 fitting screw, supporting rings.                                                                                                                                         | 000.588  | 128.00  |
| Cutting disk is not included in the delivery |                                                                                                                                                                                                               |                                                                                                                                                                                                                           |          |         |
| W                                            | <br><b>GADIA EDGE 45° Set</b> , chamfer miller, for chamfers on top and bottom edges.                                        | Tool holder M14, 3 spacers, coarse miller (G50), fine miller (G100)                                                                                                                                                       | 000.047  | 539.00  |
|                                              | Coarse miller, 1 pcs.                                                                                                                                                                                         | Grit G50                                                                                                                                                                                                                  | 000.052  | 248.00  |
|                                              | Fine miller, 1 pcs.                                                                                                                                                                                           | Grit G100                                                                                                                                                                                                                 | 000.053  | 193.00  |
|                                              | Tool holder                                                                                                                                                                                                   | M14 incl. 3 spacers                                                                                                                                                                                                       | 000.054  | 128.00  |
| W                                            | <br><b>GADIA CONNECT</b> , easily make flush-sealed edge connections on kitchen countertops.                                 | Groove grinding set for edge connections (like GADIA DISC, but for use with plastic chips)                                                                                                                                | 000.541  | 399.00  |
|                                              | Plastic chips, 20 pcs                                                                                                                                                                                         | for surface flush-sealed edge connections                                                                                                                                                                                 | 000.545  | 44.00   |
|                                              | Plastic chips, 50 pcs                                                                                                                                                                                         | for surface flush-sealed edge connections                                                                                                                                                                                 | 000.546  | 99.00   |
| W                                            | <br><b>GADIA ROUTER SET</b> , make recesses, e.g. for flush to surface ceran hotplates                                     | Tool holder with space wheel M14 inner x M10 inner, Finger router Ø 20/16x7mm, M10 AG outer connection                                                                                                                    | 000.509  | 141.00  |
|                                              | <b>GADIA ROUTER shank</b> , single                                                                                                                                                                            | Tool holder with space wheel M14 inner x M10 inner                                                                                                                                                                        | 000.505  | 63.00   |
|                                              | <b>GADIA ROUTER milling head</b> , single                                                                                                                                                                     | Finger router Ø 20/16x7mm, M10 outer connection                                                                                                                                                                           | 003.601  | 105.00  |

### Diamond profile cutter with spacer GADIA PROFILE - for granite and marble, sintered.

|          | Profile                                                                             | Pos. | Color | Type   | Slab 2 cm  |         | Slab 3 cm  |         | Slab 4 cm  |         |
|----------|-------------------------------------------------------------------------------------|------|-------|--------|------------|---------|------------|---------|------------|---------|
|          |                                                                                     |      |       |        | Item No.   | Price € | Item No.   | Price € | Item No.   | Price € |
| <b>W</b> |  | 1    | blue  | ZENITH | ZBLU1GRV20 | 490.00  | ZBLU1GRV30 | 509.00  | ZBLU1GRV40 | 607.00  |
|          |                                                                                     | 2    | gold  | ZENITH | ZOR02GRV20 | 409.00  | ZOR02GRV30 | 471.00  | ZOR02GRV40 | 546.00  |
| <b>W</b> |  | 1    | blue  | ZENITH | ZBLU1GRA20 | 408.00  | ZBLU1GRA30 | 436.00  | ZBLU1GRA40 | 533.00  |
|          |                                                                                     | 2    | gold  | ZENITH | ZOR02GRA20 | 347.00  | ZOR02GRA30 | 408.00  | ZOR02GRA40 | 496.00  |

### Spacer GADIA PROFILE - to create different profile shapes

Position 1 and 2 V-profile millers can only be used to make the profiles shown here using the appropriate spacers.

|          | Profile                                                                             | Conversion kit for: | Slab 2 cm |         | Slab 3 cm |         | Slab 4 cm |         |
|----------|-------------------------------------------------------------------------------------|---------------------|-----------|---------|-----------|---------|-----------|---------|
|          |                                                                                     |                     | Item No.  | Price € | Item No.  | Price € | Item No.  | Price € |
| <b>W</b> |  | Pos. 1              | GETVAW    | 69.00   | GETVAW    | 69.00   | GETV4AW   | 69.00   |
|          |                                                                                     | Pos. 2              | GETVAB    | 75.00   | GETVAB    | 75.00   | GETV4AB   | 75.00   |
|          |  | Pos. 1              | GETVTW    | 86.00   | GETVTW    | 86.00   |           |         |

**Consulting Hotline +49 26 63 - 94 37 0**

|          | Designation                                                                                    | Description                                                              | Item No. | Price € |
|----------|------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|----------|---------|
| <b>W</b> | <br>Adapter | R ½" outer x M14 inner x M8 inner, necessary when using profile millers. | 028.249  | 29.00   |

## GADIA-DONUT-PLUS-SYSTEM for recesses with 45° edge

|                                                                                    | Designation                                                                                                                                            | Description                                                                                                                       | Item No. | Price € |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------|---------|
|    | GADIA TWIN CUP, pre-miller for GADIA DONUT SYSTEM, without holder                                                                                      | Ø 80 mm, coarse double-sided usable grinder. First side for hard stone. Reverse side soft stone.                                  | 012.157  | 303.00  |
|                                                                                    | GADIA TWIN CUP, connecting adaptor                                                                                                                     | Holder M14 inner / R1/2" outer, incl. screws.                                                                                     | 028.256  | 97.00   |
|    | GADIA CUP 45° Ø 100 mm, surface grinder with 45° edge for recesses. Connection M14 inside.                                                             | Pos. 1: Coarse, color: green                                                                                                      | 016.019  | 475.00  |
|                                                                                    |                                                                                                                                                        | Pos. 2: Medium, color: yellow                                                                                                     | 016.020  | 475.00  |
|                                                                                    |                                                                                                                                                        | Pos. 3: Fine, color: white                                                                                                        | 016.021  | 475.00  |
|                                                                                    | Adapter                                                                                                                                                | R1/2" outer x M14 outer                                                                                                           | 028.214  | 24.00   |
|   | GADIA DONUT PLUS<br>Ø 100 mm, surface grinder with 45° edge for recesses.<br><br>Can be used on both sides.<br><br>M14 inside thread for GADIA Damper. | Pos. 4: Grit 100                                                                                                                  | 003.680  | 120.00  |
|                                                                                    |                                                                                                                                                        | Pos. 5: Grit 200                                                                                                                  | 003.681  | 120.00  |
|                                                                                    |                                                                                                                                                        | Pos. 6: Grit 400                                                                                                                  | 003.682  | 120.00  |
|                                                                                    |                                                                                                                                                        | Pos. 7: Grit 800                                                                                                                  | 003.683  | 120.00  |
|                                                                                    |                                                                                                                                                        | Pos. 8: Grit 2000                                                                                                                 | 003.684  | 120.00  |
|                                                                                    |                                                                                                                                                        | Pos. 9: Grit 3000                                                                                                                 | 003.685  | 120.00  |
|                                                                                    |                                                                                                                                                        | Pos. 10: Grit polisher                                                                                                            | 003.686  | 120.00  |
|                                                                                    |                                                                                                                                                        | Special set price: (100 - polisher) 1 each                                                                                        | 003.687  | 791.00  |
|  | GADIA DAMPER, cushioned tool holder for DONUT PLUS.<br><br>Connecting adaptor R1/2" outer, tool holder M14 outer                                       | For GADIA DONUT; spring force: 0 - 800 N                                                                                          | 016.025  | 296.00  |
|                                                                                    |                                                                                                                                                        | For GADIA DONUT; spring force: 0 - 800 N                                                                                          | 016.026  | 296.00  |
|  | ROUTER Milling head - sintered                                                                                                                         | Ø 20 mm, coating 14 mm, thread M10, central water feeding. For gradual milling (routing) of openings for sinks, kitchen tops etc. | 003.605  | 89.00   |
|                                                                                    | Holder                                                                                                                                                 | R1/2" machine connection thread and M10 inner thread for connection of the router segment.                                        | 003.606  | 50.00   |

## GADIA-CUT cutting discs

- ■ ■ ■ Concrete
- ■ ■ ■ Old concrete
- ■ ■ ■ Exp. aggregate concr.
- ■ ■ ■ Concrete roof tiles
- ■ ■ ■ Bricks with holes
- ■ ■ ■ Masonry
- ■ ■ ■ Reinforced concrete
- ■ ■ ■ Universally
- ■ ■ ■ Bricks
- ■ ■ ■ Fibre cement panels

- ■ ■ ■ □ □ Edge quality
- ■ ■ ■ □ □ Speed
- ■ ■ ■ □ □ Service life

**W D**

 Quality: **STANDARD** ■ ■ ■ ■ □ □

- Wide range of applications due to special segment composition.
- Laser welding of the segments for highest user safety.
- High diamond segment coating enables good tool life results.
- High cutting quality with good cutting comfort due to close interlocking.
- Use of high-quality diamonds for good cutting performance.

| Ø mm | Hole mm | Cutting disc with connecting flange | Segment information mm |        | Carrier body | Price € | Item no. |
|------|---------|-------------------------------------|------------------------|--------|--------------|---------|----------|
|      |         |                                     | Wide                   | Height |              |         |          |
| 115  | 22.2    | -                                   | 2.2                    | 10.0   | closed area  | 26.00   | 029.325  |
| 125  | 22.2    | -                                   | 2.2                    | 10.0   | closed area  | 28.00   | 029.326  |
| 125  | -       | with flange                         | 2.2                    | 10.0   | closed area  | 47.00   | 029.326F |
| 150  | 22.2    | -                                   | 2.6                    | 10.0   | closed area  | 32.00   | 029.327  |
| 150  | -       | with flange                         | 2.6                    | 10.0   | closed area  | 51.00   | 029.327F |
| 180  | 22.2    | -                                   | 2.6                    | 10.0   | closed area  | 37.00   | 029.328  |
| 180  | -       | with flange                         | 2.6                    | 10.0   | closed area  | 56.00   | 029.328F |
| 200  | 22.2    | -                                   | 2.6                    | 10.0   | closed area  | 43.00   | 029.329  |
| 230  | 22.2    | -                                   | 2.6                    | 10.0   | closed area  | 45.00   | 029.330  |
| 230  | -       | with flange                         | 2.6                    | 10.0   | closed area  | 92.00   | 029.330F |

### CONCRETE/UNIVERSAL

#### GADIA **ULTRA-CUT**



Other Ø sizes on request

- ■ ■ ■ Exp. aggregate concr.
- ■ ■ ■ Concrete roof tiles
- ■ ■ ■ Bricks with holes
- ■ ■ ■ Masonry
- ■ ■ ■ Concrete
- ■ ■ ■ Old concrete
- ■ ■ ■ Reinforced concrete
- ■ ■ ■ Universally
- ■ ■ ■ Bricks

- ■ ■ ■ □ □ Edge quality
- ■ ■ ■ □ □ Speed
- ■ ■ ■ □ □ Service life

**W D**

 Quality: **STANDARD** ■ ■ ■ ■ □ □

- Wide range of applications due to special segment composition.
- Laser welding of the segments for highest user safety.
- High diamond segment coating enables good tool life results.
- High cutting quality with good cutting comfort due to close interlocking.
- Use of high-quality diamonds for good cutting performance.

| Ø mm | Hole mm | Cutting disc with connecting flange | Segment information mm |        | Carrier body | Price € | Item no. |
|------|---------|-------------------------------------|------------------------|--------|--------------|---------|----------|
|      |         |                                     | Wide                   | Height |              |         |          |
| 115  | 22.2    | -                                   | 2.3                    | 10.0   | closed area  | 23.00   | 029.625  |
| 125  | 22.2    | -                                   | 2.3                    | 10.0   | closed area  | 25.00   | 029.626  |
| 125  | -       | with flange                         | 2.3                    | 10.0   | closed area  | 44.00   | 029.626F |
| 150  | 22.2    | -                                   | 2.6                    | 10.0   | closed area  | 30.00   | 029.627  |
| 150  | -       | with flange                         | 2.6                    | 10.0   | closed area  | 49.00   | 029.627F |
| 180  | 22.2    | -                                   | 2.6                    | 10.0   | closed area  | 38.00   | 029.628  |
| 180  | -       | with flange                         | 2.6                    | 10.0   | closed area  | 57.00   | 029.628F |
| 200  | 22.2    | -                                   | 2.6                    | 10.0   | closed area  | 46.00   | 029.629  |
| 230  | 22.2    | -                                   | 2.6                    | 10.0   | closed area  | 48.00   | 029.630  |
| 230  | -       | with flange                         | 2.6                    | 10.0   | closed area  | 95.00   | 029.630F |

Other Ø sizes on request

### CONCRETE/UNIVERSAL

#### GADIA **MEGA-CUT**



- ■ ■ ■ Reinforced concrete
- ■ ■ ■ Artificial stone
- ■ ■ ■ Natural stone
- ■ ■ ■ Hard clinker
- ■ ■ ■ Basalt
- ■ ■ ■ Slates
- ■ ■ ■ Granite
- ■ ■ ■ Hard roof tiles
- ■ ■ ■ Hard lime sand bricks
- ■ ■ ■ Marble
- ■ ■ ■ Porphyry

- ■ ■ ■ □ □ Edge quality
- ■ ■ ■ □ □ Speed
- ■ ■ ■ □ □ Service life

**W D S**

 Quality: **PROFI** ■ ■ ■ ■ □ □

- Turbo segment geometry for good cutting performance and cutting comfort.
- Reduced noise emission due to sandwich carrier body.
- Laser welding of the segments for best safety against segment loss.
- Ideal for use in granites, natural and artificial stones.
- Suitable for use on wall chasers.

| Ø mm | Hole mm | Cutting disc with connecting flange | Segment information mm |        | Carrier body | Price € | Item no. |
|------|---------|-------------------------------------|------------------------|--------|--------------|---------|----------|
|      |         |                                     | Wide                   | Height |              |         |          |
| 125  | 22.2    | -                                   | 2.2                    | 12.0   | Sandwich     | 59.00   | 029.020  |
| 160  | 22.2    | -                                   | 2.6                    | 12.0   | Sandwich     | 91.00   | 029.021  |

Other Ø sizes on request

### HARD STONE CONCRETE

#### GADIA **WHISPER-CUT**



- ■ ■ ■ Granite
- ■ ■ ■ Natural stone
- ■ ■ ■ Artificial stone
- ■ ■ ■ Basalt
- ■ ■ ■ Hard roof tiles
- ■ ■ ■ Hard clay roof tiles
- ■ ■ ■ Clinker
- ■ ■ ■ Concrete
- ■ ■ ■ Reinforced concrete

- ■ ■ ■ □ Edge quality
- ■ ■ ■ □ Speed
- ■ ■ ■ □ Service life

**W D**

Quality: **PROFI** ■ ■ ■ ■ □

- Special turbo tothing for short cutting times.
- High diamond segment coating enables good tool life results.
- Special segment specification for medium-hard to hard materials.
- Carrier protection segments for effective wear protection of the carrier body.

| Ø mm | Hole mm | Cutting disc with connecting flange | Segment information mm |        | Carrier body | Price € | Item no. |
|------|---------|-------------------------------------|------------------------|--------|--------------|---------|----------|
|      |         |                                     | Wide                   | Height |              |         |          |
| 115  | 22.2    | -                                   | 2.1                    | 8      | closed area  | 36.00   | 029.030  |
| 115  | -       | with flange                         | 2.1                    | 8      | closed area  | 55.00   | 029.030F |
| 125  | 22.2    | -                                   | 2.2                    | 8      | closed area  | 38.00   | 029.031  |
| 125  | -       | with flange                         | 2.2                    | 8      | closed area  | 57.00   | 029.031F |
| 150  | 22.2    | -                                   | 2.2                    | 8      | closed area  | 48.00   | 029.032  |
| 150  | -       | with flange                         | 2.2                    | 8      | closed area  | 67.00   | 029.032F |
| 180  | 22.2    | -                                   | 2.4                    | 8      | closed area  | 61.00   | 029.033  |
| 180  | -       | with flange                         | 2.4                    | 8      | closed area  | 80.00   | 029.033F |
| 230  | 22.2    | -                                   | 2.4                    | 8      | closed area  | 91.00   | 029.034  |
| 230  | -       | with flange                         | 2.4                    | 8      | closed area  | 126.00  | 029.034F |

## HARD STONE CONCRETE

### GADIA **SPRINT-CUT**



Other Ø sizes on request

- ■ ■ ■ Granite
- ■ ■ ■ Concrete
- ■ ■ ■ Exp. aggregate concr.
- ■ ■ ■ Clinker
- ■ ■ ■ Bricks
- ■ ■ ■ Hard clay roof tiles
- ■ ■ ■ Artificial stone
- ■ ■ ■ Basalt
- ■ ■ ■ Sandstone

- ■ ■ ■ □ Edge quality
- ■ ■ ■ □ Speed
- ■ ■ ■ □ Service life

**W D**

Quality: **PREMIUM** ■ ■ ■ ■ ■

- Sintered cutting disc with special bond for hard material.
- Carrier protection segments for effective wear protection of the carrier body.
- High cutting comfort and precision due to closed cutting edge.
- Premium product with high cutting ability and good service life.

| Ø mm | Hole mm | Cutting disc with connecting flange | Segment information mm |        | Carrier body | Price € | Item no. |
|------|---------|-------------------------------------|------------------------|--------|--------------|---------|----------|
|      |         |                                     | Wide                   | Height |              |         |          |
| 115  | 22.2    | -                                   | 2.4                    | 9      | punched      | 35.00   | 029.610  |
| 125  | 22.2    | -                                   | 2.5                    | 9      | punched      | 38.00   | 029.611  |
| 125  | -       | with flange                         | 2.5                    | 9      | punched      | 57.00   | 029.611F |
| 150  | 22.2    | -                                   | 2.9                    | 9      | punched      | 52.00   | 029.612  |
| 150  | -       | with flange                         | 2.9                    | 9      | punched      | 71.00   | 029.612F |
| 180  | 22.2    | -                                   | 2.9                    | 9      | punched      | 57.00   | 029.613  |
| 180  | -       | with flange                         | 2.9                    | 9      | punched      | 76.00   | 029.613F |
| 230  | 22.2    | -                                   | 2.9                    | 9      | punched      | 78.00   | 029.614  |
| 230  | -       | with flange                         | 2.9                    | 9      | punched      | 113.00  | 029.614F |

## HARD STONE CONCRETE

### GADIA **SPEED-CUT**



Other Ø sizes on request

- ■ ■ ■ Concrete
- ■ ■ ■ Granite
- ■ ■ ■ Granite shelves
- ■ ■ ■ Clinker
- ■ ■ ■ Artificial stone
- ■ ■ ■ Natural stone
- ■ ■ ■ Hard roof tiles
- ■ ■ ■ Hard clay roof tiles
- ■ ■ ■ Slates
- ■ ■ ■ Hard lime sand bricks
- ■ ■ ■ Hard clinker

- ■ ■ ■ □ Edge quality
- ■ ■ ■ □ Speed
- ■ ■ ■ □ Service life

**D**

Quality: **PREMIUM** ■ ■ ■ ■ ■

- Special turbo segment geometry for extra short cutting times.
- High diamond segment coating enables good tool life results.
- Special segment specification for medium-hard to hard materials.
- Precise cutting in hard materials and high cutting comfort.

| Ø mm | Hole mm | Cutting disc with connecting flange | Segment information mm |        | Carrier body | Price € | Item no. |
|------|---------|-------------------------------------|------------------------|--------|--------------|---------|----------|
|      |         |                                     | Wide                   | Height |              |         |          |
| 115  | 22.2    | -                                   | 2.4                    | 10.0   | closed area  | 55,00   | 029.040  |
| 125  | 22.2    | -                                   | 2.4                    | 10.0   | closed area  | 81,00   | 029.041  |
| 125  | -       | with flange                         | 2.4                    | 10.0   | closed area  | 100,00  | 029.041F |
| 150  | 22.2    | -                                   | 2.6                    | 10.0   | closed area  | 105,00  | 029.042  |
| 150  | -       | with flange                         | 2.6                    | 10.0   | closed area  | 124,00  | 029.042F |
| 180  | 22.2    | -                                   | 2.6                    | 10.0   | closed area  | 117,00  | 029.043  |
| 180  | -       | with flange                         | 2.6                    | 10.0   | closed area  | 136,00  | 029.043F |
| 230  | 22.2    | -                                   | 2.6                    | 10.0   | closed area  | 124,00  | 029.045  |
| 230  | -       | with flange                         | 2.6                    | 10.0   | closed area  | 143,00  | 029.045F |

## HARD STONE CONCRETE

### GADIA **PLUS-CUT**



Other Ø sizes on request

- ■ ■ ■ Granite
- ■ ■ ■ Concrete
- ■ ■ ■ Natural stone
- ■ ■ ■ Artificial stone
- ■ ■ ■ Hard roof tiles
- ■ ■ ■ Hard clay roof tiles
- ■ ■ ■ Glazed clinkers
- ■ ■ ■ Slates
- ■ ■ ■ Hard clinker
- ■ ■ ■ Porphyry
- ■ ■ ■ Marble

- ■ ■ ■ □ Edge quality
- ■ ■ ■ ■ Speed
- ■ ■ ■ □ Service life

**W D**Quality: **PREMIUM** ■ ■ ■ ■ ■

- High feed rate in hard material due to special turbo cutting edge.
- High diamond segment coating enables good tool life results.
- Special cutting material specification for hard materials.
- Good precision and cutting comfort due to closed cutting edge.

| Ø mm | Hole mm | Cutting disc with connecting flange | Segment information mm |        | Carrier body | Price € | Item no. |
|------|---------|-------------------------------------|------------------------|--------|--------------|---------|----------|
|      |         |                                     | Wide                   | Height |              |         |          |
| 115  | 22.2    | -                                   | 2.0                    | 12.0   | punched      | 34.00   | 029.530  |
| 125  | 22.2    | -                                   | 2.2                    | 12.0   | punched      | 40.00   | 029.531  |
| 125  | -       | with flange                         | 2.2                    | 12.0   | punched      | 59.00   | 029.531F |
| 150  | 22.2    | -                                   | 2.2                    | 12.0   | punched      | 50.00   | 029.532  |
| 150  | -       | with flange                         | 2.2                    | 12.0   | punched      | 69.00   | 029.532F |
| 180  | 22.2    | -                                   | 2.8                    | 12.0   | punched      | 81.00   | 029.533  |
| 180  | -       | with flange                         | 2.8                    | 12.0   | punched      | 100.00  | 029.533F |
| 230  | 22.2    | -                                   | 2.8                    | 12.0   | punched      | 94.00   | 029.534  |
| 230  | -       | with flange                         | 2.8                    | 12.0   | punched      | 129.00  | 029.534F |

## HARD STONE CONCRETE

### GADIA **TURBO-CUT**



Other Ø sizes on request

- ■ ■ ■ Screed
- ■ ■ ■ Asphalt
- ■ ■ ■ Plaster
- ■ ■ ■ Aerated concrete
- ■ ■ ■ Abrasive materials
- ■ ■ ■ Lightweight concrete
- ■ ■ ■ Poroton bricks
- ■ ■ ■ Sandstone
- ■ ■ ■ Fireclay soft
- ■ ■ ■ Fresh concrete
- ■ ■ ■ Bricks with holes

- ■ ■ ■ □ Edge quality
- ■ ■ ■ □ Speed
- ■ ■ ■ □ Service life

**D**Quality: **STANDARD** ■ ■ ■ ■ □

- Sintered cutting disc for Masonry, screed, asphalt, lime sandstone (soft).
- Special segment design for use in abrasive materials.
- Suitable for use on wall chasers and angle grinders.
- Good price-performance ratio when used in abrasive materials.

| Ø mm | Hole mm | Cutting disc with connecting flange | Segment information mm |        | Carrier body | Price € | Item no. |
|------|---------|-------------------------------------|------------------------|--------|--------------|---------|----------|
|      |         |                                     | Wide                   | Height |              |         |          |
| 115  | 22.2    | -                                   | 2.4                    | 7.0    | closed area  | 38.00   | 029.765  |
| 125  | 22.2    | -                                   | 2.4                    | 7.0    | closed area  | 41.00   | 029.766  |
| 125  | -       | with flange                         | 2.4                    | 7.0    | closed area  | 60.00   | 029.766F |
| 150  | 22.2    | -                                   | 2.4                    | 7.0    | closed area  | 49.00   | 029.767  |
| 150  | -       | with flange                         | 2.4                    | 7.0    | closed area  | 68.00   | 029.767F |
| 180  | 22.2    | -                                   | 2.6                    | 7.0    | closed area  | 62.00   | 029.768  |
| 180  | -       | with flange                         | 2.6                    | 7.0    | closed area  | 81.00   | 029.768F |
| 230  | 22.2    | -                                   | 3.2                    | 7.0    | closed area  | 81.00   | 029.769  |
| 230  | -       | with flange                         | 3.2                    | 7.0    | closed area  | 116.00  | 029.769F |

Other Ø sizes on request

## SANDSTONE ASPHALT

### GADIA **ABRASIV-CUT**



- ■ ■ ■ Fine stoneware tiles
- ■ ■ ■ Ceramic tiles
- ■ ■ ■ Natural stone tiles
- ■ ■ ■ Tiles
- ■ ■ ■ Clinker facing bricks
- ■ ■ ■ Hard roof tiles
- ■ ■ ■ Hard clay roof tiles
- ■ ■ ■ Marble tiles

- ■ ■ ■ □ Edge quality
- ■ ■ ■ ■ Speed
- ■ ■ ■ □ Service life

**W D**Quality: **PROFI** ■ ■ ■ ■ □

- Cutting disc, extra thin for good cutting ability in hard materials.
- Fine toothed turbo cutting edge for good cutting edge quality.
- Improved running accuracy due to log reinforcement at Ø115/125mm.
- Ideal for porcelain stoneware, ceramics, hard tiles, clinker & tiles.
- Closed cutting edge.

| Ø mm | Hole mm | Cutting disc with connecting flange | Segment information mm |        | Carrier body | Price € | Item no. |
|------|---------|-------------------------------------|------------------------|--------|--------------|---------|----------|
|      |         |                                     | Wide                   | Height |              |         |          |
| 115  | 22.2    | -                                   | 1.2                    | 7.0    | punched      | 27.00   | 029.516  |
| 125  | 22.2    | -                                   | 1.2                    | 7.0    | punched      | 29.00   | 029.517  |
| 125  | -       | with flange                         | 1.2                    | 7.0    | punched      | 48.00   | 029.517F |
| 150  | 22.2    | -                                   | 1.4                    | 7.0    | punched      | 47.00   | 029.518  |
| 150  | -       | with flange                         | 1.4                    | 7.0    | punched      | 66.00   | 029.518F |
| 180  | 22.2    | -                                   | 1.6                    | 7.0    | punched      | 61.00   | 029.519  |
| 180  | -       | with flange                         | 1.6                    | 7.0    | punched      | 80.00   | 029.519F |
| 200  | 22.2    | -                                   | 1.8                    | 7.0    | punched      | 70.00   | 029.522  |
| 230  | 22.2    | -                                   | 1.8                    | 7.0    | punched      | 90.00   | 029.520  |
| 230  | -       | with flange                         | 1.8                    | 7.0    | punched      | 125.00  | 029.520F |
| 250  | 30:25.4 | -                                   | 2.0                    | 7.0    | punched      | 101.00  | 029.525  |
| 250  | -       | with flange                         | 2.0                    | 7.0    | punched      | 148.00  | 029.525F |

Other Ø sizes on request

## TILE, CERAMIC FINE STONEWARE

### GADIA **EASY-CUT**



- Fine stoneware tiles
- Ceramic tiles
- Natural stone tiles
- Tiles
- Clinker facing bricks
- Hard roof tiles
- Hard clay roof tiles

- Edge quality
- Speed
- Service life

W D

Quality: **PREMIUM** ■ ■ ■ ■ ■

- Very thin cutting edge for extremely high cutting performance.
- Special cutting edge profiling for optimum grip.
- Highest precision and cutting quality.
- High diamond segment coating enables good tool life results.
- Best running smoothness and bending stiffness due to blade reinforcement.

| Ø mm | Hole mm | Cutting disc with connecting flange | Segment information mm |        | Carrier body | Price € | Item no. |
|------|---------|-------------------------------------|------------------------|--------|--------------|---------|----------|
|      |         |                                     | Wide                   | Height |              |         |          |
| 115  | 22.2    | -                                   | 1.4                    | 10.0   | punched      | 39,00   | 029.240  |
| 125  | 22.2    | -                                   | 1.4                    | 10.0   | punched      | 45,00   | 029.241  |
| 180  | 30:22.2 | -                                   | 1.6                    | 10.0   | punched      | 66,00   | 029.242  |
| 180  | -       | with flange                         | 1.6                    | 10.0   | punched      | 87,00   | 029.242F |
| 200  | 30:25.4 | -                                   | 1.6                    | 10.0   | punched      | 77,00   | 029.243  |
| 230  | 22.2    | -                                   | 1.8                    | 10.0   | punched      | 90,00   | 029.244  |
| 230  | -       | with flange                         | 1.8                    | 10.0   | punched      | 125,00  | 029.244F |

## TILE, CERAMIC FINE STONEWARE

### GADIA **SUPER-CUT**



Other Ø sizes on request

- Fine stoneware tiles
- Ceramic tiles
- Natural stone tiles
- Tiles
- Clinker facing bricks
- Hard roof tiles
- Hard clay roof tiles

- Edge quality
- Speed
- Service life

W D

Quality: **PREMIUM** ■ ■ ■ ■ ■

- Super thin cut-off wheel for best cutting ability in hard materials.
- Turbo cutting edge geometry for additionally improved cutting performance.
- High cutting comfort and precision due to closed cutting edge.
- For hard to very hard materials.

| Ø mm | Hole mm | Cutting disc with connecting flange | Segment information mm |        | Carrier body | Price € | Item no. |
|------|---------|-------------------------------------|------------------------|--------|--------------|---------|----------|
|      |         |                                     | Wide                   | Height |              |         |          |
| 115  | 22.2    | -                                   | 1.2                    | 7.0    | punched      | 43,00   | 029.140  |
| 125  | 22.2    | -                                   | 1.2                    | 7.0    | punched      | 49,00   | 029.141  |
| 125  | -       | with flange                         | 1.2                    | 7.0    | punched      | 68,00   | 029.141F |
| 150  | 22.2    | -                                   | 1.4                    | 7.0    | punched      | 61,00   | 029.142  |
| 150  | -       | with flange                         | 1.4                    | 7.0    | punched      | 79,00   | 029.142F |
| 180  | 22.2    | -                                   | 1.6                    | 7.0    | punched      | 73,00   | 029.143  |
| 180  | -       | with flange                         | 1.6                    | 7.0    | punched      | 92,00   | 029.143F |
| 200  | 30:25.4 | -                                   | 1.8                    | 7.0    | punched      | 86,00   | 029.144  |
| 230  | 22.2    | -                                   | 1.8                    | 7.0    | punched      | 109,00  | 029.145  |
| 230  | -       | with flange                         | 1.8                    | 7.0    | punched      | 128,00  | 029.145F |
| 250  | 30:25.4 | -                                   | 2.0                    | 7.0    | punched      | 117,00  | 029.146  |
| 250  | -       | with flange                         | 2.0                    | 7.0    | punched      | 151,00  | 029.146F |

## TILE, CERAMIC FINE STONEWARE

### GADIA **MULTI-CUT**



Other Ø sizes on request

- Fine stoneware tiles
- Fine stoneware 2cm
- Hard roof tiles
- Hard clay roof tiles
- Tiles
- Ceramic tiles
- Clinker facing bricks
- Natural stone tiles
- Glazed clinkers

- Edge quality
- Speed
- Service life

W D


Quality: **PREMIUM** ■ ■ ■ ■ ■

- Diamond cutting disc with closed turbo cutting edge.
- High diamond segment coating enables good tool life results.
- Very high cutting speed and very clean cutting edges.
- Optimal for rail guided Galeski cutting systems.
- Ideal for continuous use in 2cm porcelain stoneware patio tiles.

| Ø mm | Hole mm   | Cutting disc with connecting flange | Segment information mm |        | Carrier body | Price € | Item no. |
|------|-----------|-------------------------------------|------------------------|--------|--------------|---------|----------|
|      |           |                                     | Wide                   | Height |              |         |          |
| 115  | 22.2      | -                                   | 1.3                    | 11.0   | punched      | 55.00   | 029.160  |
| 125  | 22.2      | -                                   | 1.3                    | 11.0   | punched      | 60.00   | 029.161  |
| 125  | -         | with flange                         | 1.3                    | 11.0   | punched      | 79.00   | 029.161F |
| 180  | 22.2      | -                                   | 1.8                    | 10.0   | punched      | 89.00   | 029.162  |
| 180  | -         | with flange                         | 1.8                    | 10.0   | punched      | 108.00  | 029.162F |
| 200  | 30.0:25.4 | -                                   | 1.8                    | 8.0    | punched      | 99.00   | 029.163  |
| 230  | 22.2      | -                                   | 1.8                    | 8.0    | punched      | 125.00  | 029.164  |
| 230  | -         | with flange                         | 1.8                    | 8.0    | punched      | 144.00  | 029.164F |
| 250  | 30:25.4   | -                                   | 2.0                    | 8.0    | punched      | 147.00  | 029.165  |
| 250  | -         | with flange                         | 2.0                    | 8.0    | punched      | 166.00  | 029.165F |

## TILE, CERAMIC FINE STONEWARE

### GADIA **CERAM-CUT**

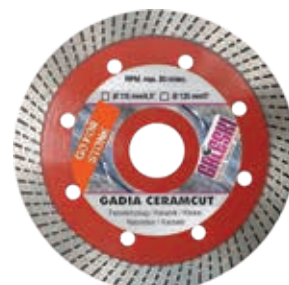

Other Ø sizes on request

## GADIA-CUP Cup grinding wheels

☒ Concrete  
☒ Masonry  
☒ Bricks  
☒ Screed  
☒ Tile adhesive  
☒ Natural stone  
☒ Thermoplastic paints  
☒ Universally  
☒ Adhesive residues

☒ Surface quality  
☒ Speed  
☒ Service life

**W D**

Quality: **PROFI** ☒ ☒ ☒ ☒ ☒

Cup disc with turbo segments

- Diamond grinding disc with special T-segmentation for good stock removal.
- Suitable for concrete products Natural stone, Granite
- Milled recesses in the carrier body for optimized dust removal
- Flat overall height for flexible use on various concrete grinders
- Ideally suited for renovation work on concrete floors

### BETON/UNIVERSAL

#### GADIA **ROTOR T-CUP**



| Ø mm | Hole mm | Segment information mm |        |        |          | Overall height mm | Price € | Item no. |
|------|---------|------------------------|--------|--------|----------|-------------------|---------|----------|
|      |         | Wide                   | Height | Length | Quantity |                   |         |          |
| 125  | 22.2    | 20.0                   | 5.0    | 25     | 10       | 21                | 91.00   | 012.303  |
| 180  | 22.2    | 22.0                   | 5.0    | 32     | 12       | 30                | 142.00  | 012.304  |

☒ Concrete  
☒ Masonry  
☒ Bricks  
☒ Screed  
☒ Tile adhesive  
☒ Natural stone  
☒ Thermoplastic paints  
☒ Universally  
☒ Adhesive residues

☒ Surface quality  
☒ Speed  
☒ Service life

**W D**

Quality: **PREMIUM** ☒ ☒ ☒ ☒ ☒

Cup disc with turbo segments

- High grinding stock removal due to interchangeable segment geometry (short/long)
- Large cooling and suction holes for lower process temperatures
- Can be used on hand-held concrete and angle grinders
- Extra flat design for optimized grinding behavior
- Excellent price-power ratio

### CONCRETE/UNIVERSAL

#### GADIA **ROTOR CUP**



| Ø mm | Hole mm | Segment information mm |        |        |          | Overall height mm | Price € | Item no. |
|------|---------|------------------------|--------|--------|----------|-------------------|---------|----------|
|      |         | Wide                   | Height | Length | Quantity |                   |         |          |
| 125  | 22.2    | 7.0                    | 5.0    | 18/30  | 16       | 22                | 115.00  | 012.305  |
| 180  | 22.2    | 7.0                    | 5.0    | 18/30  | 24       | 30                | 206.00  | 012.306  |

☒ Concrete  
☒ Masonry  
☒ Bricks  
☒ Screed  
☒ Tile adhesive  
☒ Universally  
☒ Natural stone

☒ Surface quality  
☒ Speed  
☒ Service life

**W D**

Quality: **PROFI** ☒ ☒ ☒ ☒ ☒

Cup disc double row segmented

- High grinding stock removal due to double-row segment arrangement
- Holes in the carrier body for sufficient cooling and extraction
- Can be used on standard concrete grinders with suction system
- High grinding comfort due to precisely balanced grinding plate
- Ideally suited for grinding concrete floors

### CONCRETE/UNIVERSAL

#### GADIA **DOUBLE-CUP**



| Ø mm | Hole mm | Segment information mm |        |        |          | Overall height mm | Price € | Item no. |
|------|---------|------------------------|--------|--------|----------|-------------------|---------|----------|
|      |         | Wide                   | Height | Length | Quantity |                   |         |          |
| 125  | 22.2    | 8.0                    | 5.0    | 30/20  | 20       | 22                | 83.00   | 012.154  |
| 180  | 22.2    | 8.0                    | 5.0    | 30/20  | 30       | 30                | 119.00  | 012.307  |

☒ Concrete  
☒ Masonry  
☒ Bricks  
☒ Screed  
☒ Tile adhesive  
☒ Natural stone  
☒ Universally

☒ Surface quality  
☒ Speed  
☒ Service life

W D

Quality: **CLASSIC** ☒ ☒ ☒ ☒ ☒ ☐

Cup disc double row segmented

- Double-row grinding plate with special segment structure
- Centrally arranged ventilation holes for optimal self-cooling
- Highest efficiency during sanding due to use of suitable extraction system
- High grinding comfort due to precisely balanced grinding plate
- Very economical due to top price/powers ratio

| Ø mm | Hole mm | Segment information mm |        |        |          | Overall height mm | Price € | Item no. |
|------|---------|------------------------|--------|--------|----------|-------------------|---------|----------|
|      |         | Wide                   | Height | Length | Quantity |                   |         |          |
| 125  | 22.2    | 7.0                    | 5.0    | 28/21  | 20       | 19                | 54.00   | 012.308  |
| 180  | 22.2    | 7.0                    | 5.0    | 38/31  | 24       | 30                | 102.00  | 012.309  |

## CONCRETE/UNIVERSAL

### GADIA **DOUBLE-CUP**



☒ Abrasive materials  
☒ Asphalt  
☒ Screed  
☒ Tile adhesive  
☒ Aerated concrete  
☒ Plaster  
☒ Sandstone  
☒ Lightweight concrete  
☒ Masonry  
☒ Fresh concrete

☒ Surface quality  
☒ Speed  
☒ Service life

W D

Quality: **PROFI** ☒ ☒ ☒ ☒ ☒ ☐

Cup disc double row segmented

- Double row sanding disc for processing asphalt, screed floors.
- Good abrasive removal combined with good feed per unit time
- Holes in the carrier body for weight saving and better cooling
- Optimum stock removal power only possible with suitable suction system
- Can be used on angle grinders and concrete grinders

| Ø mm | Hole mm | Segment information mm |        |        |          | Overall height mm | Price € | Item no. |
|------|---------|------------------------|--------|--------|----------|-------------------|---------|----------|
|      |         | Wide                   | Height | Length | Quantity |                   |         |          |
| 125  | 22.2    | 6.0                    | 5.0    | 31/22  | 18       | 22                | 85.00   | 012.310  |
| 180  | 22.2    | 8.0                    | 5.0    | 34/28  | 24       | 30                | 135.00  | 012.311  |

## ABRASIVE MATERIALS, ASPHALT

### GADIA **DOUBLE-CUP**



☒ Abrasive materials  
☒ Asphalt  
☒ Screed  
☒ Tile adhesive  
☒ Aerated concrete  
☒ Masonry  
☒ Plaster  
☒ Sandstone  
☒ Lightweight concrete  
☒ Thermoplastic paints  
☒ Fresh concrete

☒ Surface quality  
☒ Speed  
☒ Service life

W D

Quality: **PREMIUM** ☒ ☒ ☒ ☒ ☒ ☒

Cup disc with turbo segments

- Diamond grinding disc with special T-segmentation for good stock removal.
- Suitable for asphalt, screed, plaster, abrasive concrete products
- Milled recesses in the carrier body for optimized dust removal
- Flat overall height for flexible use on various concrete grinders
- Ideally suited for renovation work on screed floors

| Ø mm | Hole mm | Segment information mm |        |        |          | Overall height mm | Price € | Item no. |
|------|---------|------------------------|--------|--------|----------|-------------------|---------|----------|
|      |         | Wide                   | Height | Length | Quantity |                   |         |          |
| 125  | 22.2    | 20.0                   | 5.0    | 25     | 10       | 22                | 95.00   | 012.312  |
| 180  | 22.2    | 22.0                   | 5.0    | 32     | 12       | 30                | 142.00  | 012.313  |

## ABRASIVE MATERIALS, ASPHALT

### GADIA **ABRASIV-T-CUP**



■ ■ ■ Concrete  
 ■ ■ ■ Granite  
 ■ ■ ■ Artificial stone  
 ■ ■ ■ Marble  
 ■ ■ ■ Natural stone  
 ■ ■ ■ Terrazzo  
 ■ ■ ■ Glazed clinkers

■ ■ ■ ■ ■ Surface quality  
 ■ ■ ■ ■ ■ Speed  
 ■ ■ ■ ■ ■ Service life

W D

Quality: **PREMIUM** ■ ■ ■ ■ ■

Cup disc

- Grinding disc for Granite, Natural stone, Artificial stone, Concrete
- Cutting pad in turbo optics for good stock removal per time unit
- Good grinding surface quality due to large grinding surface area
- Special carrier hole pattern for better extraction and cooling
- Abrasive discs are available with 22.2 mm bores or with M14 interior

## NATURAL STONE

### GADIA **TURBO-CUP**



| Ø mm | Machine connection | Grit    | Segment info mm |        | Overall height mm | Price € | Item no. |
|------|--------------------|---------|-----------------|--------|-------------------|---------|----------|
|      |                    |         | Wide            | Height |                   |         |          |
| 50   | M14 Inner          | 30/40   | 14.0            | 5.0    | 22                | 74,00   | 012.238  |
| 60   | M14 Inner          | 30/40   | 10.0            | 5.0    | 22                | 78,00   | 012.239  |
| 80   | M14 Inner          | 30/40   | 17.0            | 5.0    | 22                | 89,00   | 012.240  |
| 100  | M14 Inner          | 30/40   | 21.0            | 5.0    | 22                | 90,00   | 012.241  |
| 100  | Hole 22.2          | 30/40   | 21.0            | 5.0    | 22                | 90,00   | 012.242  |
| 110  | M14 Inner          | 30/40   | 21.0            | 5.0    | 22                | 106,00  | 012.243  |
| 110  | Hole 22.2          | 30/40   | 21.0            | 5.0    | 22                | 106,00  | 012.244  |
| 125  | M14 Inner          | 30/40   | 22.0            | 5.0    | 22                | 125,00  | 012.245  |
| 125  | Hole 22.2          | 30/40   | 22.0            | 5.0    | 22                | 125,00  | 012.246  |
| 125  | Hole 22.2          | 60/70   | 22.0            | 5.0    | 22                | 125,00  | 012.247  |
| 125  | Hole 22.2          | 100/120 | 22.0            | 5.0    | 22                | 125,00  | 012.248  |
| 178  | Hole 22.2          | 30/40   | 31.0            | 5.0    | 30                | 171,00  | 012.249  |

|                                                                        |     |                              |          |                                                                                                                |
|------------------------------------------------------------------------|-----|------------------------------|----------|----------------------------------------------------------------------------------------------------------------|
| Quality<br>■ ■ ■ ■ ■ <b>PROFI</b>                                      |     | Dry grinding<br>Wet grinding |          | <b>VELCRO HOLDERS</b><br><br> |
| • Velcro holders for diamond grinding pads<br>• Connection thread M 14 |     |                              |          |                                                                                                                |
| Designation                                                            | Ø   | €                            | Item no. |                                                                                                                |
| Rubber disc superflex                                                  | 100 | 49.00                        | 006.114  |                                                                                                                |
| Rubber disc flexible                                                   | 100 | 45.00                        | 006.112  |                                                                                                                |
| Rubber disc flexible                                                   | 125 | 55.00                        | 006.136  |                                                                                                                |
| Hard plastic holder                                                    | 100 | 45.00                        | 006.116  |                                                                                                                |
| Aluminum holder                                                        | 80  | 35.00                        | 006.145B |                                                                                                                |
| Aluminum holder                                                        | 100 | 29.00                        | 006.144  |                                                                                                                |
| Aluminum holder                                                        | 125 | 55.00                        | 006.145  |                                                                                                                |


|                                                                                                                                      |     |                                            |          |                                    |  |
|--------------------------------------------------------------------------------------------------------------------------------------|-----|--------------------------------------------|----------|------------------------------------|--|
| Quality<br>■ ■ ■ ■ ■ <b>PROFI</b>                                                                                                    |     | <b>Dry grinding</b><br><b>Wet grinding</b> |          | <b>VELCRO MAGNETIC<br/>HOLDERS</b> |  |
| <ul style="list-style-type: none"><li>• Velcro magnetic holders for diamond grinding pads</li><li>• Connection thread M 14</li></ul> |     |                                            |          |                                    |  |
| Designation                                                                                                                          | Ø   | €                                          | Item no. |                                    |  |
| Tornado-mini-<br><b>magnetic coupling</b><br>with 4 holding magnets                                                                  | 100 | 49.00                                      | 006.158  |                                    |  |
| Tornado-mini-<br><b>velcro holder plate</b><br>with 2 driving pins,<br>velcro fastener                                               | 100 | 19.00                                      | 006.159  |                                    |  |
| Tornado-mini-<br><b>holder set</b><br>1 magnetic coupling and 6 pieces<br>of Velcro holding plates                                   | 100 | 128.00                                     | 006.160  |                                    |  |




|                                                      |       |              |  |                                                                                   |
|------------------------------------------------------|-------|--------------|--|-----------------------------------------------------------------------------------|
| Quality                                              |       | Wet grinding |  | ADAPTER                                                                           |
| ■ ■ ■ ■ ■ PROFi                                      |       |              |  |                                                                                   |
| • With lateral water exit<br>• M14 inner / M14 outer |       |              |  |                                                                                   |
| Designation                                          | €     | Item no.     |  |  |
| Adapter                                              | 20.00 | 006.121      |  |                                                                                   |

|                                                     |       |                                            |  |                                                                                                                         |
|-----------------------------------------------------|-------|--------------------------------------------|--|-------------------------------------------------------------------------------------------------------------------------|
| Quality<br>■ ■ ■ ■ ■ <b>PROFI</b>                   |       | <b>Dry grinding</b><br><b>Wet grinding</b> |  | <b>GADIA</b><br><b>ANTISHOCK</b><br> |
| - For low vibration work<br>- M14 inner / M14 outer |       |                                            |  |                                                                                                                         |
| Designation                                         | €     | Item no.                                   |  |                                                                                                                         |
| <b>GADIA ANTISHOCK</b>                              | 49.90 | 016.012                                    |  |                                                                                                                         |

| Quality<br>■ ■ ■ ■ ■ <b>PREMIUM</b>                                                                                 |            |         |          | <b>Wet grinding</b>                                                                       |          |          |          |
|---------------------------------------------------------------------------------------------------------------------|------------|---------|----------|-------------------------------------------------------------------------------------------|----------|----------|----------|
| • Velcro diamond grinding and polishing wheels.<br>• High-quality-discs for best polish and with long service life. |            |         |          | • Can be used in conjunction with Velcro holder plates<br>e.g. on GALESKI POLIFOX / JOKER |          |          |          |
| Grit                                                                                                                | Color      | Ø 80 mm |          | Ø 100 mm                                                                                  |          | Ø 125 mm |          |
|                                                                                                                     |            | Price € | Item no. | Price €                                                                                   | Item no. | Price €  | Item no. |
| 50                                                                                                                  | mint green | 18.00   | 012.080  | 20.00                                                                                     | 012.100  | 35.00    | 012.125  |
| 100                                                                                                                 | gray-white | 18.00   | 012.081  | 20.00                                                                                     | 012.101  | 35.00    | 012.126  |
| 200                                                                                                                 | yellow     | 18.00   | 012.082  | 20.00                                                                                     | 012.102  | 35.00    | 012.127  |
| 400                                                                                                                 | turquoise  | 18.00   | 012.083  | 20.00                                                                                     | 012.103  | 35.00    | 012.128  |
| 800                                                                                                                 | orange     | 18.00   | 012.084  | 20.00                                                                                     | 012.104  | 35.00    | 012.129  |
| 1500                                                                                                                | green      | 18.00   | 012.085  | 20.00                                                                                     | 012.105  | 35.00    | 012.130  |
| 3000                                                                                                                | black      | 18.00   | 012.086  | 20.00                                                                                     | 012.106  | 35.00    | 012.131  |
| Polisher                                                                                                            | black      | 18.00   | 012.087  | 20.00                                                                                     | 012.107  | 35.00    | 012.132  |
| Polisher                                                                                                            | white      | 18.00   | 012.089  | 20.00                                                                                     | 012.108  | 35.00    | 012.139  |
| Special set price: Grit 50 - polisher, 1 each (white or black)                                                      |            |         |          | 145.00                                                                                    | 012.502  | 266.00   | 012.503  |

|                                                                                       |  |
|---------------------------------------------------------------------------------------|--|
| <b>GADIA RESIN PREMIUM</b>                                                            |  |
| Grinding and polishing discs                                                          |  |
|  |  |

| Quality<br>■ ■ ■ ■ ■ <b>PROFI</b>                                                          |  |         |          | <b>Dry grinding</b>                                                              |          |          |          |
|--------------------------------------------------------------------------------------------|--|---------|----------|----------------------------------------------------------------------------------|----------|----------|----------|
| • Velcro dry discs for marble and granite.<br>• Excellent colour depth. Long service life. |  |         |          | • Can be used in conjunction with Velcro holder plates<br>e.g. on GALESKI GENIUS |          |          |          |
| Grit                                                                                       |  | Ø 80 mm |          | Ø 100 mm                                                                         |          | Ø 125 mm |          |
|                                                                                            |  | Price € | Item no. | Price €                                                                          | Item no. | Price €  | Item no. |
| 50                                                                                         |  | 17.00   | 013.230  | 20.00                                                                            | 013.130  | 36.00    | 013.140  |
| 100                                                                                        |  | 17.00   | 013.231  | 20.00                                                                            | 013.131  | 36.00    | 013.141  |
| 200                                                                                        |  | 17.00   | 013.232  | 20.00                                                                            | 013.132  | 36.00    | 013.142  |
| 400                                                                                        |  | 17.00   | 013.233  | 20.00                                                                            | 013.133  | 36.00    | 013.143  |
| 800                                                                                        |  | 17.00   | 013.234  | 20.00                                                                            | 013.134  | 36.00    | 013.144  |
| 2000                                                                                       |  | 17.00   | 013.235  | 20.00                                                                            | 013.135  | 36.00    | 013.145  |
| 3000                                                                                       |  | 17.00   | 013.236  | 20.00                                                                            | 013.136  | 36.00    | 013.146  |
| Polisher                                                                                   |  | 17.00   | 013.237  | 20.00                                                                            | 013.137  | 36.00    | 013.147  |
| Special set price: Grit 50 - polisher, 1 each                                              |  | 123.00  | 013.238  | 145.00                                                                           | 013.139  | 269.00   | 013.149  |
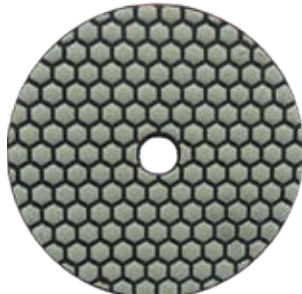
|                                                                                       |  |
|---------------------------------------------------------------------------------------|--|
| <b>GADIA EASY DRY</b>                                                                 |  |
| Grinding and polishing discs                                                          |  |
|  |  |

OFFERS

CURRENT

INFOS

CURRENT

DON'T MISS ANYTHING



Galeski westerburg



Galeski\_westerburg





Quality

■ ■ ■ ■ ■ PREMIUM

Wet drilling

**GADIA CORE**

Diamond core drill  
TOP QUALITY

- 1 Drill=2 Connection threads: R1/2"-outer u. M14-inner.
- Top quality core drills with high cutting ability and long service life  
- Made in Germany.
- Important: Mention kind of stone when ordering:

**G** = Granite (green)  
**M** = Marble (red)  
**S** = Sandstone (black)  
**B** = Concrete (gray)

**U** = Universal, Marble, Granite (blue)  
**K** = Ceramic, 25% Surcharge (yellow)  
**GL** = Glas, 25% Surcharge (silver)

- Charges for overlengths:  
up to 300 mm: +15% of 80 mm-Price  
up to 400 mm: +20% of 80 mm-Price  
up to 500 mm: +25% of 80 mm-Price
- Other threads and sizes on request.

| Ø mm<br>outer /<br>inner | Drill depth |          |        |          |        |          |
|--------------------------|-------------|----------|--------|----------|--------|----------|
|                          | 80 mm       |          | 120 mm |          | 200 mm |          |
|                          | €           | Item No. | €      | Item No. | €      | Item No. |
| <b>6.0</b> / 3.0         | 67.00       | 018.501G | 63.00  | 018.601G | 66.00  | 018.701G |
| <b>8.0</b> / 5.0         | 68.00       | 018.503G | 71.00  | 018.603G | 74.00  | 018.703G |
| <b>10.0</b> / 7.0        | 74.00       | 018.505G | 75.00  | 018.605G | 79.00  | 018.705G |
| <b>12.0</b> / 9.0        | 77.00       | 018.507G | 79.00  | 018.607G | 85.00  | 018.707G |
| <b>15.0</b> / 11.0       | 82.00       | 018.510G | 85.00  | 018.610G | 88.00  | 018.710G |
| <b>20.0</b> / 16.0       | 88.00       | 018.515G | 89.00  | 018.615  | 95.00  | 018.715G |
| <b>25.0</b> / 21.0       | 95.00       | 018.520G | 98.00  | 018.620G | 103.00 | 018.720G |
| <b>30.0</b> / 26.0       | 108.00      | 018.525G | 110.00 | 018.625G | 166.00 | 018.725G |
| <b>32.0</b> / 28.0       | 113.00      | 018.527G | 114.00 | 018.627G | 121.00 | 018.727G |
| <b>35.0</b> / 31.0       | 126.00      | 018.530G | 129.00 | 018.630G | 136.00 | 018.730G |
| <b>38.0</b> / 34.0       | 138.00      | 018.533G | 140.00 | 018.633G | 147.00 | 018.733G |
| <b>40.0</b> / 36.0       | 142.00      | 018.535G | 146.00 | 018.635G | 155.00 | 018.735G |
| <b>45.0</b> / 41.0       | 158.00      | 018.540G | 161.00 | 018.640G | 168.00 | 018.740G |
| <b>50.0</b> / 46.0       | 170.00      | 018.545G | 175.00 | 018.645G | 183.00 | 018.745G |
| <b>55.0</b> / 51.0       | 185.00      | 018.550G | 189.00 | 018.650G | 203.00 | 018.750G |
| <b>60.0</b> / 56.0       | 204.00      | 018.555G | 201.00 | 018.655G | 220.00 | 018.755G |
| <b>65.0</b> / 61.0       | 225.00      | 018.560G | 229.00 | 018.660G | 241.00 | 018.760G |
| <b>68.0</b> / 64.0       | 239.00      | 018.563G | 241.00 | 018.663G | 257.00 | 018.763G |
| <b>70.0</b> / 66.0       | 247.00      | 018.565G | 250.00 | 018.665G | 263.00 | 018.765G |
| <b>75.0</b> / 70.0       | 258.00      | 018.570G | 262.00 | 018.670G | 277.00 | 018.770G |
| <b>80.0</b> / 75.0       | 263.00      | 018.575G | 271.00 | 018.675G | 284.00 | 018.775G |
| <b>85.0</b> / 80.0       | 272.00      | 018.580G | 277.00 | 018.680G | 289.00 | 018.780G |
| <b>90.0</b> / 85.0       | 278.00      | 018.585G | 284.00 | 018.685G | 292.00 | 018.785G |
| <b>95.0</b> / 90.0       | 285.00      | 018.590G | 289.00 | 018.690G | 304.00 | 018.790G |
| <b>100.0</b> / 95.0      | 293.00      | 018.595G | 297.00 | 018.695G | 316.00 | 018.795G |
| <b>105.0</b> / 100.0     | 308.00      | 018.599G | 314.00 | 018.699G | 331.00 | 018.799G |

Quality

 **PREMIUM**

Wet drilling

**GADIA DRILL**

- Use only with water cooling. M12 x 1.5 or M14 x 2.0 connection.
- Very long service life thanks to decentralized water feeding.

Diamond full drill



| Ø mm | Drill depth mm | Connection | €     | Item No. |
|------|----------------|------------|-------|----------|
| 3.5  | 25.0           | M12-Inner  | 53.00 | 024.201  |
| 4.0  | 25.0           |            | 53.50 | 024.202  |
| 5.0  | 25.0           |            | 54.00 | 024.203  |
| 6.0  | 50.0           |            | 58.50 | 024.204  |
| 7.0  | 50.0           |            | 61.50 | 024.205  |
| 8.0  | 50.0           |            | 66.00 | 024.206  |
| 9.0  | 50.0           |            | 70.00 | 024.207  |
| 10.0 | 50.0           |            | 75.00 | 024.208  |
| 12.0 | 50.0           |            | 80.00 | 024.209  |
| 14.0 | 50.0           |            | 90.00 | 024.210  |
| Ø mm | Drill depth mm | Connection | €     | Item No. |
| 3.5  | 25.0           | M14-Inner  | 53.00 | 003.004  |
| 4.0  | 25.0           |            | 53.50 | 003.005  |
| 5.0  | 25.0           |            | 54.00 | 003.006  |
| 6.0  | 50.0           |            | 58.50 | 003.007  |
| 7.0  | 50.0           |            | 61.50 | 003.008  |
| 8.0  | 50.0           |            | 66.00 | 003.009  |
| 9.0  | 50.0           |            | 70.00 | 003.010  |
| 10.0 | 50.0           |            | 75.00 | 003.011  |
| 12.0 | 50.0           |            | 80.00 | 003.012  |
| 14.0 | 50.0           |            | 90.00 | 003.013  |

Quality

 **PREMIUM**

Dry drilling

**GADIA SUPERDRILL**

- For angle grinders with M14 x 2.0 thread.
- Suitable material:  
Fine stoneware, Ceramic, tiles, thin Granite and natural stone.

Diamond core drill

| Ø mm | Drill depth mm | Covering height mm | €      | Item No. |
|------|----------------|--------------------|--------|----------|
| 20.0 | 45.0           | 10.0               | 50.00  | 039.515T |
| 35.0 | 45.0           | 10.0               | 63.00  | 039.530T |
| 45.0 | 45.0           | 10.0               | 86.00  | 039.540T |
| 50.0 | 45.0           | 10.0               | 92.00  | 039.545T |
| 68.0 | 45.0           | 10.0               | 129.00 | 039.563T |

Not available



- For angle grinders with M14 x 2.0 thread.
- Drill with wax inlay for quick drilling and longer service life.
- Suitable material:  
Fine stoneware, Ceramic, tiles, thin Granite and natural stone.

Diamond core drill  
**GADIA SUPERDRILL**

| Ø mm | Drill depth mm | Covering height mm | €     | Item No. |
|------|----------------|--------------------|-------|----------|
| 6.0  | 35.0           | 10.0               | 46.00 | 039.501T |
| 8.0  | 35.0           | 10.0               | 48.00 | 039.503T |
| 10.0 | 35.0           | 10.0               | 50.00 | 039.505T |
| 12.0 | 35.0           | 10.0               | 53.00 | 039.507T |
| 14.0 | 35.0           | 10.0               | 56.00 | 039.509T |

Not available



- For angle grinders with M14 x 2.0 thread.
- Router for universal use, e.g. grinding out slots.
- Suitable material:  
Fine stoneware, Ceramic, tiles, thin Granite and natural stone.

Finger router  
**GADIA SUPERDRILL**

| Ø mm | Drill depth mm | Covering height mm | €     | Item No. |
|------|----------------|--------------------|-------|----------|
| 16.0 | 39.0           | 39.0               | 89.00 | 039.609  |

Not available



**When selecting a saw blade, please observe the following:**

• Only choose segmented, sintered blades for granite according to the appropriate slab thickness. E.g. **G2** and **B2** for 2 cm slabs; **G3** and **B3** for 3 cm slabs. Incorrect use results in irregular wear and intense vibrations.

The segmented blades for granite are available in two categories:

1) **G** blades for full cuts in the corresponding slab thickness, e.g. circular cut after opening up by drilling.

2) **B** blades for cutting remainders, e.g. in the corners of hotplates after opening up with a cutting disc. The diamond segments on the blade work at different rates and are laid out differently.

• The segmented, sintered granite and sandstone blades should be sharpened occasionally in a sharpening stone.

• Electroplated blades (**SGM** / **SGM-S**) for marble, soapstone and soft stone can be used for all slab thicknesses up to 6 cm (up to 7 cm in soapstone). Never sharpen these blades with a sharpening stone!

**JIG SAW TOOLS & ACCESSORIES**


|                                                                                     | Designation                                                    | Description                                                                                                   | Suitable Machine                                                                     | Item No.                              | Price € |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------|---------|
|     | For marble<br>Saw blade <b>SGM</b> 60 mm                       | Electroplated                                                                                                 |   | PGS 50<br>001.101                     | 49.00   |
|                                                                                     | For soapstone<br>Saw blade <b>SGM-S</b> 70 mm                  |                                                                                                               |                                                                                      | PGS 60<br>SHARKY<br>001.116           | 49.00   |
|     | For granite<br>Saw blade <b>G2</b> 20 mm                       | Sintered                                                                                                      |  | PGS 60<br>001.802                     | 49.00   |
|                                                                                     | Saw blade <b>G3</b> 30 mm                                      |                                                                                                               |                                                                                      | SHARKY<br>001.803                     | 49.00   |
|                                                                                     | Saw blade <b>G4</b> 40 mm                                      |                                                                                                               |                                                                                      | 001.804                               | 49.00   |
|   | For remainders of bridge saw cuts<br>Saw blade <b>B2</b> 20 mm | Sintered                                                                                                      |  | PGS 60<br>001.809                     | 49.00   |
|                                                                                     | Saw blade <b>B3</b> 30 mm                                      |                                                                                                               |                                                                                      | SHARKY<br>001.810                     | 49.00   |
|                                                                                     | Saw blade <b>B4</b> 40 mm                                      |                                                                                                               |                                                                                      | 001.811                               | 49.00   |
|   | For sandstone<br>Saw blade <b>S4</b> 40 mm                     | Sintered                                                                                                      |  | PGS 60<br>001.805                     | 49.00   |
|                                                                                     | Saw blade <b>S5</b> 50 mm                                      |                                                                                                               |                                                                                      | SHARKY<br>001.806                     | 49.00   |
|                                                                                     | Saw blade <b>S6</b> 60 mm                                      |                                                                                                               |                                                                                      | 001.807                               | 64.00   |
|                                                                                     | Saw blade <b>S8</b> 80 mm                                      |                                                                                                               |                                                                                      | 001.808                               | 74.00   |
|  | Blade guide                                                    | Aluminum with carbide guides, screw                                                                           |                                                                                      | PGS 25<br>PGS 50<br>001.202           | 69.00   |
|  | Rinsing unit                                                   | Aluminum with carbide and plastic guides, screw and sealing ring                                              |                                                                                      | PGS 60<br>SHARKY<br>001.303           | 134.00  |
|  | Spare felt coating, 1 pair                                     | with single-sided adhesive tape                                                                               |                                                                                      | PGS 50<br>PGS 60<br>SHARKY<br>001.206 | 13.00   |
|  | Sharpening stone, small                                        | For sharpening sintered diamond tools, e.g. drills and blades                                                 |                                                                                      | 001.004                               | 19,00   |
|                                                                                     | Sharpening stone, large                                        |                                                                                                               |                                                                                      | 018.006                               | 4700    |
|   | Adhesive tape, price per meter                                 | Not available<br>Always use polished surface when cutting, to mark the cutting line (easy to see + permanent) | PGS 50<br>PGS 60<br>SHARKY CONTOUR CAT                                               | 001.007                               | 4,00    |



| Pos.                              | Designation                                           | Description                                                                                                                   | Item No.    | Price € |
|-----------------------------------|-------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|-------------|---------|
| <b>POLIFOX 1700 / JOKER MAXI</b>  |                                                       |                                                                                                                               |             |         |
| 1                                 | GADIA VARIO COVER                                     | Ideal splash guard for inside work. Tool Ø: max. 130 mm. Height adjustable plastic skirting for different tool heights.       | 060.036.150 | 209.00  |
|                                   | GADIA VARIO COVER extra skirting tape                 | 3-piece with Velcro backing for GADIA VARIO COVER. Standard height 40 mm. Please ask for other sizes.                         | 150.000.005 | 35.00   |
| <b>TURBOCUT DCS / TYPHOON DCS</b> |                                                       |                                                                                                                               |             |         |
| 2                                 | Textile filter bag, 3 pieces                          | For TURBOCUT and TYPHOON with integrated dust extraction.                                                                     | 036.092     | 59.00   |
| 3                                 | Mobile Filter Set                                     | For TYPHOON and Turbocut. 2-piece filter box with roller and hose fastener. Hose with integrated dust extraction.             | 036.104     | 183.00  |
| 4                                 | Connecting adapter                                    | For TURBOCUT 160:<br>Guiding and connecting piece for GALESKI rails.                                                          | 036.128     | 63.00   |
| 5                                 | Holder for brush                                      | <b>For TYPHOON without front opening 35/2 and 70/2:</b><br>Plastic holder with fixed brush.                                   | 101.431     | 55.00   |
| 6                                 | Holder for brush                                      | <b>For TYPHOON with front opening 35/2-W and 70/2-W:</b><br>Plastic ring, 3 springs, 3 screws, 3 lock washers, without brush. | 160.000.207 | 74.00   |
| 7                                 | Front fastening                                       | Fastener, 3 O-rings, cable ties, catch, without brush.                                                                        | 080.101.572 | 49.00   |
| 8                                 | 2-piece brush set                                     | Replacement brushes, fit into plastic ring and front fastener                                                                 | 080.101.568 | 39.00   |
|                                   | Brush ring - set                                      | Complete set (positions 6 - 8)                                                                                                | 101.567     | 120.00  |
| 9                                 | <b>Special</b> Aluminum holder, Ø 125 mm, for TYPHOON | Connecting M14, velcro backing, for wet and dry polishing.                                                                    | 006.146     | 43.00   |
| <b>TORNADO</b>                    |                                                       |                                                                                                                               |             |         |
| 10                                | Holder for brush                                      | Plastic ring with stainless steel reinforcement, 3 springs, 3 screws, without brush.                                          | 160.000.214 | 69.00   |
| 11                                | Front fastening                                       | Fastener, 2 O-rings, 2 shafts, without brush.                                                                                 | 080.101.579 | 43.00   |
| 12                                | 2-piece brush set                                     | Replacement brushes, fit into plastic ring and front fastener.                                                                | 160.000.218 | 39.00   |
|                                   | Brush ring - set                                      | Complete set (positions 10 - 12)                                                                                              | 160.000.217 | 139.00  |
| 13                                | <b>Special</b> Aluminum holder, Ø 125 mm, for TORNADO | Connecting M14, velcro backing, for wet and dry polishing                                                                     | 006.153     | 43.00   |



14



15



16




17



18



19



20



21



22



23



24



25




26



27

| Pos.                                          | Designation                                                                                             | Description                                                                                         | Item No.    | Price € |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-------------|---------|
| <b>LIONCUT 200</b>                            |                                                                                                         |                                                                                                     |             |         |
| 14                                            | Guide slide                                                                                             | To convert Lioncut versions without a guide slide.                                                  | 003.036.312 | 249.00  |
| 15                                            | Plastic layer with Velcro                                                                               | Fits on guide slide when working on delicate surfaces.                                              | 003.036.313 | 25.00   |
| 16                                            | Spare felt layer                                                                                        | Felt for delicate surfaces                                                                          | 003.036.316 | 21.00   |
| 17                                            | Connecting adaptor                                                                                      | Guiding and connecting part of the machine to the GALESKI rail system                               | 003.036.314 | 55.00   |
| 18                                            | Water connection                                                                                        | Water connecting set to convert dry LIONCUT machines                                                | 003.036.315 | 113.00  |
| <b>SMART CUTTER</b>                           |                                                                                                         |                                                                                                     |             |         |
| 19                                            | Plastic coating with velcro                                                                             | Attach to guide slide for use on rough stone                                                        | 003.036.604 | 22.00   |
| <b>CONTOUR CAT</b>                            |                                                                                                         |                                                                                                     |             |         |
| 20                                            | Plastic coating with velcro                                                                             | for CONTOUR CAT base plate (for use on rough stone)                                                 | 000.526     | 28.00   |
| <b>For CUTTER (e.g. DOMINATOR)</b>            |                                                                                                         |                                                                                                     |             |         |
| 21                                            | <b>FIXTEC</b> -flange nut                                                                               | Suitable for cutting discs up to max. Ø 180 mm                                                      | 017.636     | 25.00   |
| 22                                            | <b>FIXTEC</b> -flange nut                                                                               | Suitable for cutting discs up to max. Ø 230 mm                                                      | 060.101.449 | 45.00   |
| 23                                            | <b>Aluminum flange with 4 screws</b> for cutter with disc Ø 115 to Ø 180 mm (e.g. DOMINATOR 125 & 180)  | Connection M14 / Hole 22.2 mm                                                                       | 029.449     | 19.00   |
| 24                                            | <b>Stainless steel flange with 6 screws</b> for cutter with disc Ø 200 to Ø 300 mm (e.g. DOMINATOR 250) | Connection M14 / Hole 22.2 mm                                                                       | 029.480     | 48.00   |
| <b>SPLASH GUARDS for Galeski Wet Machines</b> |                                                                                                         |                                                                                                     |             |         |
| 25                                            | GADIA SPLASHGUARD, small                                                                                | Connected with a clamp, suitable for POLIFOX 900                                                    | 101.535     | 19.00   |
| 26                                            | GADIA SPLASHGUARD, medium                                                                               | Connected with a clamp, suitable for POLIFOX 1400 to 1700, TIGERCUT, JOKER MAXI/SPEED/EASY, LIONCUT | 003.079     | 25.00   |
| 27)                                           | GADIA SPLASHGUARD, large                                                                                | Connected with a cable tie, 2 protective caps, suitable for POLIFOX 1802.                           | 003.117     | 35.00   |



| Pos.                                   | Designation                                              | Description                                                                                                                                         | Item No.    | Price € |
|----------------------------------------|----------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|-------------|---------|
| <b>CABLE TIES for Galeski Machines</b> |                                                          |                                                                                                                                                     |             |         |
| 28                                     | Cable tie, small                                         | The cable tie is connected to the cable and water hose.<br><br>Suitable for Tigercut, all Polifox and Joker machines, Wetcut, Lioncut & Contour Cat | 160.000.032 | 22.00   |
| 29                                     | Cable tie, medium                                        | The cable tie is connected to the bushing and hose.<br><br>Suitable for all Tornado, Typhoon, Turbocut und Dominator 125 + 180, Lioncut 200         | 160.000.033 | 25.00   |
| 30                                     | Cable tie, large                                         | The cable tie is connected to the bushing and hose.<br><br>Suitable for Dominator 250                                                               | 160.000.037 | 27.00   |
| Pos.                                   | External dimensions                                      | Use for / Machine recommendation                                                                                                                    | Item No.    | Price € |
| <b>CASES for Galeski - Machines</b>    |                                                          |                                                                                                                                                     |             |         |
| 31                                     | 588 x 388 x 160 mm                                       | DOMINATOR 125                                                                                                                                       | 000.115     | 89.00   |
| 31                                     | 575 x 470 x 205 mm                                       | DOMINATOR 180                                                                                                                                       | 000.116     | 114.00  |
| 31                                     | 575 x 470 x 270 mm                                       | DOMINATOR 250                                                                                                                                       | 000.117     | 129.00  |
| 31                                     | 588 x 388 x 160 mm                                       | CONTOUR CAT KS 80/4                                                                                                                                 | 000.114     | 89.00   |
| 31                                     | 588 x 388 x 160 mm                                       | LIONCUT 200                                                                                                                                         | 150.006.026 | 129.00  |
| 31                                     | 450 x 360 x 140 mm                                       | SMART CUTTER 1500 PLUS                                                                                                                              | 000.123     | 49.00   |
| 31                                     | 575 x 470 x 270 mm                                       | TIGERCUT 200                                                                                                                                        | 000.088     | 129.00  |
| 31                                     | 560 x 485 x 180 mm                                       | TURBOCUT                                                                                                                                            | 000.087     | 89.00   |
| 31                                     | 560 x 485 x 180 mm                                       | WETCUT 180/2                                                                                                                                        | 000.124     | 89.00   |
| 31                                     | 588 x 388 x 160 mm                                       | Neutral case with nap foam insert.                                                                                                                  | 000.122     | 85.00   |
| Pos.                                   | Designation                                              | Description                                                                                                                                         | Item No.    | Price € |
| <b>GENERAL ACCESSORIES</b>             |                                                          |                                                                                                                                                     |             |         |
| 32                                     | Quality isolating transformer TT 2602                    | 230/230V 2000VA 230V primary / 230V secondary, with CEE - socket 12 o'clock, 2000 Watt.                                                             | 038.015     | 548.00  |
| 33                                     | PRESSURE TANK, steel housing, 10 L, max 6 bar, portable. | Useful for work at construction sites without water supply, includes 3 m water hose with brass quick coupling.                                      | 002.003     | 239.00  |
| 34                                     | Safety mask                                              | Safety mask with exchangeable fog-free shield<br>345 mm x 200 mm                                                                                    | 000.119     | 38.00   |
|                                        | Spare shield                                             | Not available<br>Fog-free                                                                                                                           | 000.120     | 17.00   |

### DUSTCLEANER 200



The Dustcleaner 200 is a class „H“ industrial vacuum cleaner. It is suitable for fine dust and health hazardous dust.

| Technical data     |             | Included                                                                                                                                                                 |
|--------------------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power              | 1,100 Watt  | Plastic hose 4 m (Ø 38 mm), handpipe curved, groove nozzle, round brush, pyramid nozzle with hose and reduction, brush nozzle, duct filter, HEPA-filter, collection bag. |
| Voltage            | 230 Volt    |                                                                                                                                                                          |
| Air flow max.      | 3,240 L/min |                                                                                                                                                                          |
| Vacuum max.        | 250 mbar    |                                                                                                                                                                          |
| Weight             | 21 kg       |                                                                                                                                                                          |
| Available versions |             | Item no.                                                                                                                                                                 |
| DUSTCLEANER 200    |             | 003.036.400                                                                                                                                                              |
|                    |             | Price net.                                                                                                                                                               |
|                    |             | 1,199.00 €                                                                                                                                                               |

### DUSTCLEANER 300-2



DUSTCLEANER 300-2: Class „M“ - specialist for removing health hazardous dust. Extraction system with automatic filter cleaning system.

| Technical data     |             | Included                                                                                                                          |
|--------------------|-------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Power              | 1,200 Watt  | Plastic hose 4 m (Ø 38 mm), handpipe curved, 2x extension tube, floor nozzle, 2x tool adapter, fleece filter bag, collection bag. |
| Voltage            | 230 Volt    |                                                                                                                                   |
| Air flow max.      | 4,500 L/min |                                                                                                                                   |
| Vacuum max.        | 250 mbar    |                                                                                                                                   |
| Weight             | 22 kg       |                                                                                                                                   |
| Available versions |             | Item no.                                                                                                                          |
| DUSTCLEANER 300-2  |             | 003.036.450                                                                                                                       |
|                    |             | Price net.                                                                                                                        |
|                    |             | 799.00 €                                                                                                                          |

### DUSTCLEANER 200 SPARE PARTS

|  | Designation   | Description                           | Item No.    | Price € |
|--|---------------|---------------------------------------|-------------|---------|
|  | Wheel, single | Replacement wheel for Dustcleaner 200 | 003.036.402 | 24,00   |

### DUSTCLEANER 300 SPARE PARTS

|  | Designation   | Description                              | Item No.    | Price € |
|--|---------------|------------------------------------------|-------------|---------|
|  | Filter        | Replacement filter for Dustcleaner 300-2 | 003.036.456 | 65,00   |
|  | Wheel, single | Replacement wheel for Dustcleaner 300-2  | 003.036.458 | 24,00   |

## PRE-SEPARATOR

**GALESKI CYCLONE 501**

Pre-separator CYCLONE 501 for connection to a standard vacuum cleaner.

The CYCLONE 501 is a pre-separator with cyclone effect and can be used with or without a plastic sack. It can be used together with a vacuum cleaner, or any other vacuum unit, when large amounts of fine dust need to be absorbed and you want to spare the filter sack, or you need more capacity.

The CYCLONE 501 takes care of 98-99% of the material to be absorbed and only the rest ends up in the vacuum cleaner. This extends the life of the vacuum cleaner considerably.

This mobile pre-separator has a capacity of 50 liters and a wide working area. Absorbing large amounts of material can easily be done, without having to move around an unwieldy machine.

CYCLONE 501 is perfect for absorbing mixed materials, as well as wet or dry materials.

**CYCLONE 501 // Pre-separator**

Example: using GALESKI CYCLONE 501 together with the DUSTCLEANER 200 vacuum cleaner.

**Technical data**

|                      |           |
|----------------------|-----------|
| Recommended air flow | 65 l/sec. |
| Collection capacity  | 50 L.     |
| Height               | 980 mm    |
| Wide                 | 435 mm    |
| Depth                | 480 mm    |
| Weight               | 15 kg     |
| Coupling             | 38/50 mm  |

**Included**

Collection bag (plastic) with cable tie.

**Available versions**  
CYCLONE 501






Item no.  
003.036.480

Price net.  
769.00 €

**CYCLONE 501 SPARE PARTS**

|                                                                                     | Designation            | Description                       | Item No.    | Price € |
|-------------------------------------------------------------------------------------|------------------------|-----------------------------------|-------------|---------|
|  | Plastic hose           | Ø 38 mm, 4 m                      | 003.036.481 | 69.00   |
|  | Plastic sack, 50 liter | With cable tie                    | 003.036.482 | 62.00   |
|  | Wheel, single          | Replacement wheel for CYCLONE 501 | 003.036.402 | 24.00   |

## Cabling Example 1

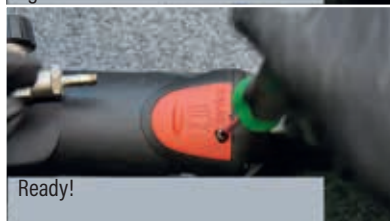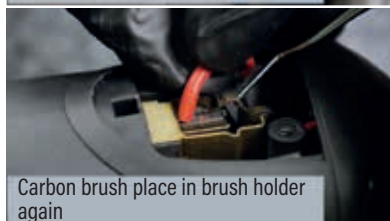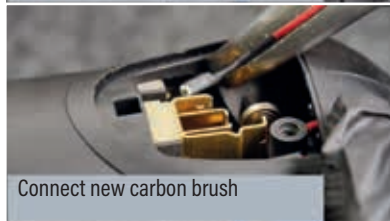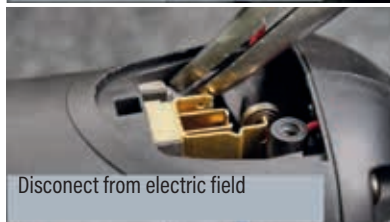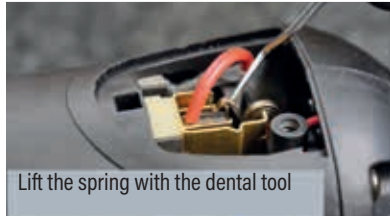

## Carbon brushes - service

All our machines include a mechanism that stops the machine when the carbon brushes are too worn.

Here we show you how you can easily replace the carbon brushes yourself.


The cabling examples 1 and 2 shown are two examples that represent the majority of our machines.

However, the carbon brushes on other GALESKI machines can also be replaced according to the same principle.

So here we go ...

Tell us:

- Your GALESKI machine type
- Number of carbon sets
- Assembly tool (screwdriver or dental tool)

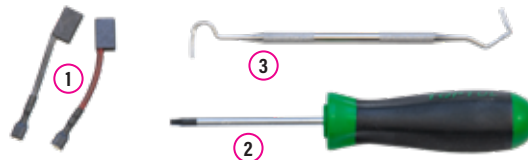

|   | Designation:                                                                      | Item no.: | Price: |
|---|-----------------------------------------------------------------------------------|-----------|--------|
| ① | <b>Carbon brushes</b><br>1 pair, 230V                                             | 100.637   | 8.90   |
| ② | <b>Screwdriver</b> for cover<br>brush holder shaft                                | 000.072   | 6.00   |
| ③ | <b>Dental tool</b><br>to lift the carbon spring                                   | 000.074   | 7.00   |
|   | <b>Complete set:</b><br>1 pair carbon brushes,<br>1 screwdriver,<br>1 dental tool | 000.076   | 21.00  |

Errors and mistakes excepted. All prices are valid plus legal value added tax, Effective: 04/2022

Also ...

Cabling examples as a film on:

**www.galeski.de**





or

visit us on



# ... Up Close !

## Cabling Example 2

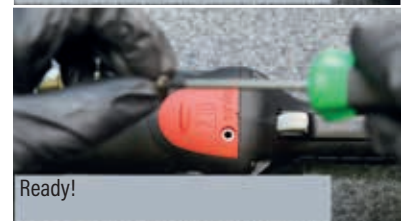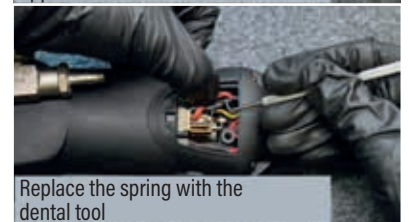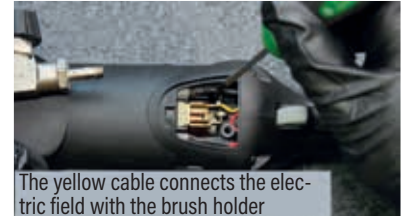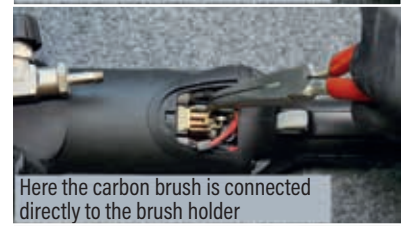

**Order-Hotline:**  
**+49 2663 9437-0**  
**info@galeski.de**

## BRUSHLESS - series

| BRUSHLESS - series                                                                  |                                                                                                                                 |      | Suitable for: |           |         |          |          |           |         |          |                   |                 |                      |                 |                 |                |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|------|---------------|-----------|---------|----------|----------|-----------|---------|----------|-------------------|-----------------|----------------------|-----------------|-----------------|----------------|
|                                                                                     |                                                                                                                                 |      | Grinding      | Polishing | Cutting | Drilling | Grinding | Polishing | Cutting | Drilling | Rail system       | Dust extraction | Natural / cast stone | Tile / ceramics | Edge processing | Floor grinding |
| Picture                                                                             | Machine Name                                                                                                                    | Page | DRY           |           |         |          | WET      |           |         |          |                   |                 |                      |                 |                 |                |
|    | <b>Angle grinder</b><br><b>GENIUS SPEED BL</b><br>1,400 Watt • 2,500 - 10,000 rpm<br>Tool Ø max. 125 mm                         | 6    | ■             | ■         | ■       | ■        |          |           |         |          | with drilling aid |                 | ■                    | ■               | ■               | ■              |
|    | <b>Angle grinder</b><br><b>GENIUS MAXI BL</b><br>1,400 Watt • 1,600 - 6,400 rpm<br>Tool Ø 150 mm                                | 6    | ■             | ■         | ■       | ■        |          |           |         |          | with drilling aid |                 | ■                    | ■               | ■               | ■              |
|    | <b>All-round machine</b><br><b>JOKER MAXI BL</b><br>1,400 Watt • 1,600 - 6,400 rpm<br>Tool Ø max. 125 mm                        | 6    |               |           |         |          | ■        | ■         |         | ■        | with drilling aid |                 | ■                    | ■               | ■               | ■              |
|    | <b>Floor grinding machine</b><br><b>TORNADO MAXI BL</b><br>1,400 Watt • 1,600 - 6,400 rpm<br>Tool Ø max. 125 mm                 | 6    | ■             | ■         |         |          |          |           |         |          | with vac. cleaner |                 | ■                    |                 |                 | ■              |
|   | <b>Cutter</b><br><b>SMART CUTTER 125 ECO BL</b><br>1,400 Watt • 1,600 - 6,400 rpm<br>Tool Ø max. 125 mm                         | 7    |               |           | ■       |          |          |           |         |          | with vac. cleaner |                 | ■                    | ■               |                 |                |
|  | <b>Cutter</b><br><b>SMART CUTTER 125 PLUS BL</b><br>1,400 Watt • 1,600 - 6,400 rpm<br>Tool Ø max. 125 mm                        | 7    |               |           | ■       |          |          |           |         | ■        | with vac. cleaner |                 | ■                    | ■               |                 |                |
|  | <b>Cutter</b><br><b>DOMINATOR 125 PLUS BL</b><br>1,400 Watt • 1,600 - 6,400 rpm<br>Tool Ø max. 125 mm                           | 7    |               |           | ■       |          |          |           |         |          | with vac. cleaner |                 | ■                    | ■               |                 |                |
|  | <b>Cutter</b><br><b>ECOMAX 125 BL</b><br>1,400 Watt • 2,500 - 10,000 rpm<br>Tool Ø max. 125 mm                                  | 7    |               |           | ■       |          |          |           | ■       |          |                   |                 | ■                    | ■               |                 |                |
|  | <b>Milling machine</b><br><b>ATLAS PRO BL</b><br>1,400 Watt • 1,600 - 6,400 rpm<br>Tool Ø max. 98 mm                            | 8    | milling drum  |           |         |          |          |           |         |          | with vac. cleaner |                 | ■                    | ■               |                 | ■              |
|  | <b>Milling machine</b><br><b>ATLAS MAX BL</b><br>1,400 Watt • 1,600 - 6,400 rpm<br>Tool Ø max. 98 mm                            | 8    | milling drum  |           |         |          |          |           |         |          | with vac. cleaner |                 | ■                    | ■               |                 | ■              |
|  | <b>Surface drilling system</b><br><b>COMBINATOR MAXI BL</b><br>1,400 Watt • 1,600 - 6,400 rpm<br>Tool Ø max. 70 mm              | 8    |               |           |         |          |          |           |         | ■        | with vac. cleaner |                 | ■                    | ■               |                 |                |
|  | <b>Steinkanten Bearbeitungssystem</b><br><b>CONTOUR CAT KS80 BL</b><br>1,400 Watt • 1,600 - 6,400 rpm<br>Tool Ø max. 118/180 mm | 8    |               |           |         |          | ■        | ■         | ■       |          |                   |                 | ■                    | ■               | ■               |                |

|                                                                                     |                                                                                                                                                        |        | Suitable for:   |           |         |          |                 |           |         |          |                   |                   |                      |                 |                 |                |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-----------------|-----------|---------|----------|-----------------|-----------|---------|----------|-------------------|-------------------|----------------------|-----------------|-----------------|----------------|
|                                                                                     |                                                                                                                                                        |        | Grinding        | Polishing | Cutting | Drilling | Grinding        | Polishing | Cutting | Drilling | Rail system       | Dust extraction   | Natural / cast stone | Tile / ceramics | Edge processing | Floor grinding |
| Picture                                                                             | Machine Name                                                                                                                                           | Page   | DRY             |           |         |          | WET             |           |         |          |                   |                   |                      |                 |                 |                |
|     | <b>WETCUT 180/3 PLUS</b><br>1,750 Watt • 1,700 - 6,800 rpm<br>Tool Ø max. 180 mm<br>Cutting depth max. 52 / 57 mm<br>(for the pulling and pushing cut) | from 9 | Milling grooves |           |         |          | Milling grooves |           |         |          |                   | with vac. cleaner |                      |                 |                 |                |
| <b>KP - Edge polisher</b>                                                           |                                                                                                                                                        |        |                 |           |         |          |                 |           |         |          |                   |                   |                      |                 |                 |                |
|    | <b>GENIUS KP 80/100</b><br>890 Watt • 1,000 - 4,000 rpm<br>Tool Ø max. 80/100 mm                                                                       | 13     |                 |           |         |          |                 |           |         |          |                   |                   |                      |                 |                 |                |
|    | <b>POLIFOX KP 80/100</b><br>890 Watt • 800 - 3,600 rpm<br>Tool Ø max. 80/100 mm                                                                        | 13     |                 |           |         |          |                 |           |         |          |                   |                   |                      |                 |                 |                |
| <b>GENIUS - Angle grinder</b>                                                       |                                                                                                                                                        |        |                 |           |         |          |                 |           |         |          |                   |                   |                      |                 |                 |                |
|    | <b>GENIUS SPEED VARIO</b><br>1,520 Watt • 2,700 - 9,500 rpm<br>Tool Ø max. 125 mm                                                                      | 14     |                 |           |         |          |                 |           |         |          | with drilling aid |                   |                      |                 |                 |                |
|  | <b>GENIUS MAXI CON</b><br>1,750 Watt • 6,800 rpm<br>Tool Ø max. 150 mm                                                                                 | 14     |                 |           |         |          |                 |           |         |          | with drilling aid |                   |                      |                 |                 |                |
|  | <b>GENIUS MAXI/2 VARIO</b><br>1,750 Watt • 1,700 - 6,800 rpm<br>Tool Ø max. 150 mm                                                                     | 14     |                 |           |         |          |                 |           |         |          | with drilling aid |                   |                      |                 |                 |                |
|   | <b>GENIUS 2400 MAXI CON</b><br>2,400 Watt • 6,600 rpm<br>Tool Ø max. 230 mm                                                                            | 14     |                 |           |         |          |                 |           |         |          | with drilling aid |                   |                      |                 |                 |                |
| <b>GENIUS - Angle polisher</b>                                                      |                                                                                                                                                        |        |                 |           |         |          |                 |           |         |          |                   |                   |                      |                 |                 |                |
|  | <b>GENIUS 900 CON</b><br>890 Watt • 3,500 rpm<br>Tool Ø max. 115 mm                                                                                    | 14     |                 |           |         |          |                 |           |         |          | with drilling aid |                   |                      |                 |                 |                |
|  | <b>GENIUS 900 VARIO</b> (with side handle)<br><b>GENIUS 900 VARIO/B</b> (mit bail handle)<br>890 Watt • 1,000 - 4,000 rpm<br>Tool Ø max. 115 mm        | 14     |                 |           |         |          |                 |           |         |          | with drilling aid |                   |                      |                 |                 |                |
|  | <b>GENIUS 1400 CON</b><br>1,420 Watt • 2,500 rpm<br>Tool Ø max. 125 mm                                                                                 | 15     |                 |           |         |          |                 |           |         |          | with drilling aid |                   |                      |                 |                 |                |
|  | <b>GENIUS 1400 CON/B</b><br>1,420 Watt • 2,500 rpm<br>Tool Ø max. 125 mm                                                                               | 15     |                 |           |         |          |                 |           |         |          | with drilling aid |                   |                      |                 |                 |                |

| GENIUS - Angle polisher                                                             |                                                                                  |         | Suitable for: |           |         |          |          |           |         |          |                   |                 |                      |                 |                 |                |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|---------|---------------|-----------|---------|----------|----------|-----------|---------|----------|-------------------|-----------------|----------------------|-----------------|-----------------|----------------|
|                                                                                     |                                                                                  |         | Grinding      | Polishing | Cutting | Drilling | Grinding | Polishing | Cutting | Drilling | Rail system       | Dust extraction | Natural / cast stone | Tile / ceramics | Edge processing | Floor grinding |
| Picture                                                                             | Machine Name                                                                     | Page    | DRY           |           |         |          | WET      |           |         |          |                   |                 |                      |                 |                 |                |
|     | <b>GENIUS 1400 VARIO</b><br>1,420 Watt • 800 - 3,400 rpm<br>Tool Ø max. 125 mm   | 15      | ■             | ■         |         | ■        |          |           |         |          | with drilling aid |                 | ■                    | ■               | ■               | ■              |
|     | <b>GENIUS 1600 VARIO</b><br>1,590 Watt • 800 - 3,600 rpm<br>Tool Ø max. 150 mm   | 15      | ■             | ■         |         | ■        |          |           |         |          | with drilling aid |                 | ■                    | ■               | ■               | ■              |
|    | <b>GENIUS 1700 VARIO/B</b><br>1,750 Watt • 800 - 3,600 rpm<br>Tool Ø max. 150 mm | 15      | ■             | ■         |         | ■        |          |           |         |          | with drilling aid |                 | ■                    | ■               | ■               | ■              |
|     | <b>GENIUS 1802</b><br>1,800 Watt • 2,000 rpm<br>Tool Ø max. 180 mm               | 15      | ■             | ■         |         | ■        |          |           |         |          | with drilling aid |                 | ■                    | ■               | ■               | ■              |
| POLIFOX - Winkelpolierer                                                            |                                                                                  |         |               |           |         |          |          |           |         |          |                   |                 |                      |                 |                 |                |
|  | <b>POLIFOX 900 CON</b><br>890 Watt • 3,400 rpm<br>Tool Ø max. 100 mm             | from 16 |               |           |         |          | ■        | ■         |         | ■        | with drilling aid |                 | ■                    | ■               | ■               | ■              |
|  | <b>POLIFOX 900 VARIO</b><br>890 Watt • 800 - 3,600 rpm<br>Tool Ø max. 100 mm     | from 16 |               |           |         |          | ■        | ■         |         | ■        | with drilling aid |                 | ■                    | ■               | ■               | ■              |
|  | <b>POLIFOX 1400 CON</b><br>1,400 Watt • 2,500 rpm<br>Tool Ø max. 100 mm          | from 16 |               |           |         |          | ■        | ■         |         | ■        | with drilling aid |                 | ■                    | ■               | ■               | ■              |
|   | <b>POLIFOX 1400 VARIO</b><br>1,400 Watt • 900 - 3,400 rpm<br>Tool Ø max. 100 mm  | from 16 |               |           |         |          | ■        | ■         |         | ■        | with drilling aid |                 | ■                    | ■               | ■               | ■              |
|   | <b>POLIFOX 1502 VARIO</b><br>1,560 Watt • 800 - 3,400 rpm<br>Tool Ø max. 125 mm  | from 16 |               |           |         |          | ■        | ■         |         | ■        | with drilling aid |                 | ■                    | ■               | ■               | ■              |
|   | <b>POLIFOX 1700 VARIO</b><br>1,750 Watt<br>800 - 3,600 rpm<br>Tool Ø max. 125 mm | from 16 |               |           |         |          | ■        | ■         |         | ■        | with drilling aid |                 | ■                    | ■               | ■               | ■              |
|   | <b>POLIFOX 1802</b><br>1,800 Watt • 2,000 rpm<br>Tool Ø max. 125 mm              | from 16 |               |           |         |          | ■        | ■         |         | ■        | with drilling aid |                 | ■                    | ■               | ■               | ■              |

| JOKER - All-round machine                                                           |                                                                                                           |         | Suitable for: |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|---------|---------------|-----------|---------|----------|----------|-----------|---------|----------|-------------|-----------------|----------------------|-----------------|-----------------|----------------|
|                                                                                     |                                                                                                           |         | Grinding      | Polishing | Cutting | Drilling | Grinding | Polishing | Cutting | Drilling | Rail system | Dust extraction | Natural / cast stone | Tile / ceramics | Edge processing | Floor grinding |
| Picture                                                                             | Machine Name                                                                                              | Page    | DRY           |           |         |          | WET      |           |         |          |             |                 |                      |                 |                 |                |
|     | <b>JOKER SPEED VARIO</b><br>1,550 Watt • 2,700 - 9,500 rpm<br>Grinder Ø max. 100 mm • Drill Ø max. 20 mm  | from 18 |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|                                                                                     |                                                                                                           |         |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|     | <b>JOKER MAXI/2 VARIO</b><br>1,750 Watt • 1,700 - 6,800 rpm<br>Grinder Ø max. 125 mm • Drill Ø max. 50 mm | from 18 |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|                                                                                     |                                                                                                           |         |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|     | <b>JOKER EASY VARIO</b><br>1,550 Watt • 800 - 3,600 rpm<br>Grinder Ø max. 100 mm • Drill Ø max. 35 mm     | from 18 |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|                                                                                     |                                                                                                           |         |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
| TORNADO - Grinder / Polisher                                                        |                                                                                                           |         |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|  | <b>TORNADO 125 SPEED CON ECO</b><br>1,500 Watt • 9,500 1/min<br>Werkzeug-Ø max. 125 mm                    | from 20 |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|                                                                                     |                                                                                                           |         |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|   | <b>TORNADO 125 MAXI VARIO ECO</b><br>1,500 Watt • 1,700 - 6,800 1/min<br>Werkzeug-Ø max. 125 mm           | from 20 |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|                                                                                     |                                                                                                           |         |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|   | <b>TORNADO 125 SPEED CON</b><br>1,500 Watt • 9,500 rpm<br>Tool Ø max. 125 mm                              | from 20 |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|                                                                                     |                                                                                                           |         |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|   | <b>TORNADO 125 MAXI VARIO</b><br>1,750 Watt • 1,700 - 6,800 rpm<br>Tool Ø max. 125 mm                     | from 20 |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|                                                                                     |                                                                                                           |         |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|   | <b>TORNADO 125 ULTRA VARIO</b><br>1,750 Watt • 800 - 3,600 rpm<br>Tool Ø max. 125 mm                      | from 20 |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|                                                                                     |                                                                                                           |         |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
| AIR - Pneumatic machines                                                            |                                                                                                           |         |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|   | Grinder<br><b>AIR GENIUS 800</b><br>800 Watt Power output • 3,400 rpm<br>Tool Ø max. 100 mm               | from 22 |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|                                                                                     |                                                                                                           |         |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|   | Polisher<br><b>AIR GENIUS 902</b><br>900 Watt Power output • 2,000 rpm<br>Tool Ø max. 130 mm              | from 22 |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|                                                                                     |                                                                                                           |         |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |

| AIR - Pneumatic machines                                                            |                                                                                                                                                                                                                            |         | Suitable for: |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|---------------|-----------|---------|----------|----------|-----------|---------|----------|-------------|-----------------|----------------------|-----------------|-----------------|----------------|
|                                                                                     |                                                                                                                                                                                                                            |         | Grinding      | Polishing | Cutting | Drilling | Grinding | Polishing | Cutting | Drilling | Rail system | Dust extraction | Natural / cast stone | Tile / ceramics | Edge processing | Floor grinding |
| Picture                                                                             | Machine Name                                                                                                                                                                                                               | Page    | DRY           |           |         |          | WET      |           |         |          |             |                 |                      |                 |                 |                |
|     | Grinder<br><b>AIR POLIFOX 800</b><br>800 Watt Power output - 3,400 rpm<br>Tool Ø max. 100 mm                                                                                                                               | from 22 |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|     | Polisher<br><b>AIR POLIFOX 902</b><br>900 Watt Power output - 2,000 rpm<br>Tool Ø max. 130 mm                                                                                                                              | from 22 |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|     | Polisher<br><b>AIR POLIFOX 1002</b><br>950 Watt Power output - 2,000 rpm<br>Tool Ø max. 150 mm                                                                                                                             | from 22 |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|    | Cutter<br><b>AIR GENIUS MAXI</b><br>900 Watt Power output - 5,400 rpm<br>Tool Ø max. 125 mm                                                                                                                                | from 22 |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|   | Cutter<br><b>AIR ECOMAX 125</b><br>900 Watt Power output - 5,400 rpm<br>Tool Ø max. 125 mm                                                                                                                                 | from 22 |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|   | Milling machine<br><b>AIR ATLAS MAX</b><br>900 Watt Power output - 5,400 rpm<br>Tool Ø max. 98 mm                                                                                                                          | from 22 |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
| BEAVER - Cutter                                                                     |                                                                                                                                                                                                                            |         |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|   | <b>BEAVER 180/2</b><br>1,750 Watt - 2,000 - 7,000 rpm<br>Tool Ø max. 180 mm<br>Cutting depth max. 57 mm<br>(for the pulling and pushing cut)                                                                               | 27      |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|   | <b>BEAVER 230/3</b><br>2,400 Watt - 6,600 rpm<br>Tool Ø max. 230 mm<br>Cutting depth max. 65 mm<br>(for the pulling and pushing cut)                                                                                       | 27      |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
| TURBOCUT - Cutter                                                                   |                                                                                                                                                                                                                            |         |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |
|  | <b>TURBOCUT 160 DCS</b><br>mit integrierter Staubabsaugung<br>(kein zusätzlicher Staubsauger notwendig)<br>1,750 Watt - 1,700 - 6,800 rpm<br>Tool Ø Tool Ø max. 160 mm<br>Cutting depth max. 40mm<br>(for the pushing cut) | 28      |               |           |         |          |          |           |         |          |             |                 |                      |                 |                 |                |

| SMART-CUTTER - Cutter                                                              |                                                                                                                                                                     |         | Suitable for: |           |         |          |          |           |         |          |             |                   |                      |                 |                 |                |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|---------------|-----------|---------|----------|----------|-----------|---------|----------|-------------|-------------------|----------------------|-----------------|-----------------|----------------|
|                                                                                    |                                                                                                                                                                     |         | Grinding      | Polishing | Cutting | Drilling | Grinding | Polishing | Cutting | Drilling | Rail system | Dust extraction   | Natural / cast stone | Tile / ceramics | Edge processing | Floor grinding |
| Picture                                                                            | Machine Name                                                                                                                                                        | Page    | DRY           |           |         |          | WET      |           |         |          |             |                   |                      |                 |                 |                |
|    | <b>SMART-CUTTER 1500 VARIO ECO</b><br>1,520 Watt • 2,700 - 9,500 rpm<br>Tool Ø max. 125 mm<br>Cutting depth max. 25 mm<br>(for the pulling cut)                     | from 29 |               |           | ■       |          |          |           |         |          |             | with vac. cleaner | ■                    | ■               |                 |                |
|    | <b>SMART-CUTTER 1500 VARIO PLUS</b><br>1,520 Watt • 2,700 - 9,500 rpm<br>Tool Ø max. 125 mm<br>Cutting depth max. 25 mm<br>(for the pulling cut)                    | from 29 |               |           | ■       |          |          |           |         |          | ■           | with vac. cleaner | ■                    | ■               |                 |                |
|    | <b>SMART-CUTTER 1700 VARIO PLUS</b><br>1,750 Watt • 1,700 - 6,800 rpm<br>Tool Ø max. 150 mm<br>Cutting depth max. 40 mm<br>(for the pulling cut)                    | from 29 |               |           | ■       |          |          |           |         |          | ■           | with vac. cleaner | ■                    | ■               |                 |                |
| DUOCUT - Cutter with 2 different protective hoods                                  |                                                                                                                                                                     |         |               |           |         |          |          |           |         |          |             |                   |                      |                 |                 |                |
|   | <b>DUOCUT</b><br>Ecomax 180 Vario<br>additionally with Dominator protective hood<br>1,750 Watt • 1,700 - 6,800 rpm<br>Tool Ø max. 180mm<br>Cutting depth max. 58 mm | 33      |               |           | ■       |          |          |           | ■       |          |             | with vac. cleaner | ■                    | ■               |                 |                |
| DOMINATOR - Cutter                                                                 |                                                                                                                                                                     |         |               |           |         |          |          |           |         |          |             |                   |                      |                 |                 |                |
|  | <b>DOMINATOR 125</b><br>1,500 Watt • 2,700 - 9,500 rpm<br>Tool Ø max. 125 mm<br>Cutting depth max. 30 mm<br>(for the pushing cut)                                   | from 34 |               |           | ■       |          |          |           |         |          |             | with vac. cleaner | ■                    | ■               |                 |                |
|  | <b>DOMINATOR 180</b><br>1,750 Watt • 1,700 - 6,800 rpm<br>Tool Ø max. 180 mm<br>Cutting depth max. 57 mm<br>(for the pushing cut)                                   | from 34 |               |           | ■       |          |          |           |         |          |             | with vac. cleaner | ■                    | ■               |                 |                |
|  | <b>DOMINATOR 250/2</b><br>2,400 Watt • 6,600 rpm<br>Tool Ø max. 250 mm<br>Cutting depth max. 75 mm<br>(for the pushing cut)                                         | from 34 |               |           | ■       |          |          |           |         |          |             | with vac. cleaner | ■                    | ■               |                 |                |
| ECOMAX - Cutter                                                                    |                                                                                                                                                                     |         |               |           |         |          |          |           |         |          |             |                   |                      |                 |                 |                |
|  | <b>ECOMAX 180 Vario</b><br>1,750 Watt • 1,700 - 6,800 rpm<br>Tool Ø max. 180 mm<br>Cutting depth max. 57 mm                                                         | from 36 |               |           | ■       |          |          |           | ■       |          |             |                   | ■                    | ■               |                 |                |
|  | <b>ECOMAX 230/2 Con</b><br>2,400 Watt • 6,600 rpm<br>Tool Ø max. 230 mm<br>Cutting depth max. 65 mm                                                                 | from 36 |               |           | ■       |          |          |           | ■       |          |             |                   | ■                    |                 |                 |                |
| TIGERCUT - Cutter                                                                  |                                                                                                                                                                     |         |               |           |         |          |          |           |         |          |             |                   |                      |                 |                 |                |
|  | <b>TIGERCUT 200</b><br>1,750 Watt • 1,700 - 6,800 rpm<br>Tool Ø max. 200 mm<br>Cutting depth max. 63 mm<br>(for the pulling and pushing cut)                        | 39      |               |           |         |          |          |           | ■       |          |             |                   | ■                    | ■               |                 |                |

|                                                                                     |                                                                                                                                                 |         | Suitable for: |           |         |          |          |           |         |          |                   |                   |                      |                 |                 |                |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|---------|---------------|-----------|---------|----------|----------|-----------|---------|----------|-------------------|-------------------|----------------------|-----------------|-----------------|----------------|
|                                                                                     |                                                                                                                                                 |         | Grinding      | Polishing | Cutting | Drilling | Grinding | Polishing | Cutting | Drilling | Rail system       | Dust extraction   | Natural / cast stone | Tile / ceramics | Edge processing | Floor grinding |
| Picture                                                                             | Machine Name                                                                                                                                    | Page    | DRY           |           |         |          | WET      |           |         |          |                   |                   |                      |                 |                 |                |
|    | <b>LIONCUT 200 DRY</b><br>1,750 Watt • 1,700 - 6,800 rpm<br>Tool Ø max. 200 mm<br>Cutting depth max. 63 mm<br>(for the pushing cut)             | from 40 |               |           | ■       |          |          |           |         |          |                   | with vac. cleaner | ■                    | ■               |                 |                |
|    | <b>LIONCUT 200 DRY PLUS</b><br>1,750 Watt • 1,700 - 6,800 rpm<br>Tool Ø max. 200 mm<br>Cutting depth max. 58 / 63 mm<br>(for the pushing cut)   | from 40 |               |           | ■       |          |          |           |         | ■        | with vac. cleaner | ■                 | ■                    | ■               |                 |                |
|    | <b>LIONCUT 200 COMBI</b><br>1,750 Watt • 1,700 - 6,800 rpm<br>Tool Ø max. 200 mm<br>Cutting depth max. 63 mm<br>(for the pushing cut)           | from 40 |               |           | ■       |          |          | ■         |         |          | with vac. cleaner | ■                 | ■                    | ■               |                 |                |
|   | <b>LIONCUT 200 COMBI PLUS</b><br>1,750 Watt • 1,700 - 6,800 rpm<br>Tool Ø max. 200 mm<br>Cutting depth max. 58 / 63 mm<br>(for the pushing cut) | from 40 |               |           | ■       |          |          | ■         |         | ■        | with vac. cleaner | ■                 | ■                    | ■               |                 |                |
| <b>WETCUT - Cutter</b>                                                              |                                                                                                                                                 |         |               |           |         |          |          |           |         |          |                   |                   |                      |                 |                 |                |
|   | <b>WETCUT 180/3</b><br>1,750 Watt • 1,700 - 6,800 rpm<br>Tool Ø max. 180 mm<br>Cutting depth max. 57 mm<br>(for the pulling and pushing cut)    | from 9  |               |           | ■       |          |          | ■         |         | ■        | with vac. cleaner | ■                 | ■                    | ■               |                 |                |
| <b>GT - Suction drill stands and drilling motor DIAMOND</b>                         |                                                                                                                                                 |         |               |           |         |          |          |           |         |          |                   |                   |                      |                 |                 |                |
|  | <b>DIAMOND 1503 DI</b><br>1,500 Watt • 0 - 3,000 rpm<br>Drill Ø max. 162 mm                                                                     | from 44 |               |           |         | ■        |          |           | ■       |          |                   |                   | ■                    | ■               |                 |                |
|  | <b>Suction drill stand GT 402</b><br>Surfaces drilling system<br>Drill Ø max. 70 mm                                                             | from 44 |               |           |         |          |          |           | ■       |          |                   |                   |                      |                 |                 |                |
|  | <b>Suction drill stand GTA 500</b><br>Surfaces drilling system<br>Drill Ø max. 80 mm                                                            | from 44 |               |           |         |          |          |           | ■       |          | with vac. cleaner |                   |                      |                 |                 |                |

## COMBINATOR - Drill stand systems

|                                                                                    |                                                                                                                                                                                                 |            | Suitable for: |           |         |          |          |           |         |          |             |                   |                      |                 |                 |                |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------------|-----------|---------|----------|----------|-----------|---------|----------|-------------|-------------------|----------------------|-----------------|-----------------|----------------|
| Picture                                                                            | Machine Name                                                                                                                                                                                    | Page       | Grinding      | Polishing | Cutting | Drilling | Grinding | Polishing | Cutting | Drilling | Rail system | Dust extraction   | Natural / cast stone | Tile / ceramics | Edge processing | Floor grinding |
|                                                                                    |                                                                                                                                                                                                 |            | DRY           |           |         |          | WET      |           |         |          |             |                   |                      |                 |                 |                |
|    | <p>If you already own a drilling machine:</p> <p><b>COMBINATOR SOLO</b><br/>Surface drilling system<br/>without drilling motor<br/>for holes up to Ø 70 mm</p>                                  | from<br>40 |               |           |         |          |          |           |         | ■        |             | with vac. cleaner | ■                    | ■               |                 |                |
|   | <p>If you already own a drilling machine:</p> <p><b>COMBINATOR SOLO PLUS</b><br/>Surface drilling system<br/>without drilling motor<br/>for holes up to Ø 107 mm</p>                            | from<br>40 |               |           |         |          |          |           |         | ■        |             | with vac. cleaner | ■                    | ■               |                 |                |
|  | <p><b>COMBINATOR MAXI/SPEED Basic</b><br/>Surface drilling system<br/>for holes up to Ø 70 mm (MAXI)<br/>for holes up to Ø 30 mm (SPEED)</p>                                                    | from<br>40 |               |           |         |          |          |           |         | ■        |             | with vac. cleaner | ■                    | ■               |                 |                |
|  | <p><b>COMBINATOR FASSADE</b><br/>Facades drilling system<br/>for holes up to Ø 30 mm</p> <p><b>COMBINATOR SPEED Universal Set</b><br/>Universal drilling system<br/>for holes up to Ø 70 mm</p> | from<br>40 |               |           |         |          |          |           |         | ■        |             | with vac. cleaner | ■                    | ■               | ■               |                |
|  | <p><b>COMBINATOR MAXI2/POLIFOX Plus</b><br/>Surface drilling system<br/>for holes Ø 4 - 80 mm (MAXI/2)<br/>for holes Ø 20 - 107 mm (POLIFOX)</p>                                                | from<br>40 |               |           |         |          |          |           |         | ■        |             | with vac. cleaner | ■                    | ■               |                 |                |

|                                                                                     |                                                                                        |         | Suitable for: |           |         |          |          |           |         |          |             |                   |                      |                 |                 |                |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|---------|---------------|-----------|---------|----------|----------|-----------|---------|----------|-------------|-------------------|----------------------|-----------------|-----------------|----------------|
|                                                                                     |                                                                                        |         | Grinding      | Polishing | Cutting | Drilling | Grinding | Polishing | Cutting | Drilling | Rail system | Dust extraction   | Natural / cast stone | Tile / ceramics | Edge processing | Floor grinding |
| Picture                                                                             | Machine Name                                                                           | Page    | DRY           |           |         |          | WET      |           |         |          |             |                   |                      |                 |                 |                |
|    | <b>COMBINATOR DIAMOND Plus</b><br>Surface drilling system<br>for holes Ø 20 - 107 mm   | from 40 |               |           |         |          |          |           |         |          | ■           |                   | with vac. cleaner    | ■               | ■               |                |
| <b>ATLAS - Milling machine</b>                                                      |                                                                                        |         |               |           |         |          |          |           |         |          |             |                   |                      |                 |                 |                |
|   | <b>ATLAS PRO 82</b><br>Milling machine<br>Tool Ø max. 98 mm                            | from 56 | ■             |           |         |          |          |           |         |          |             | with vac. cleaner | ■                    | ■               |                 | ■              |
|   | <b>ATLAS Max 82/2</b><br>Milling machine<br>Tool Ø max. 98 mm                          | from 56 | ■             |           |         |          |          |           |         |          |             | with vac. cleaner | ■                    | ■               |                 | ■              |
| <b>CONTOUR CAT - Edge processing system</b>                                         |                                                                                        |         |               |           |         |          |          |           |         |          |             |                   |                      |                 |                 |                |
|  | <b>CONTOUR CAT KS 80/4</b><br>1,750 Watt • 2,700 - 6,500 rpm<br>Tool Ø max. 118/180 mm | from 61 |               |           |         |          | ■        | ■         | ■       |          |             |                   | ■                    | ■               | ■               |                |

## TOOLS & ACCESSORIES

| Picture                                                                             | Name                                                                                         | Page       |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|------------|
|     | <b>GADIA - LINE</b> - rail system<br>and<br><b>RAIL SYSTEM</b> with drilling aid             | from<br>42 |
|    | <b>MILLING DRUMS</b><br>for ATLAS PRO 82 / ATLAS MAX 82                                      | 60         |
|   | Tool-System<br><b>KANTENBEARBEITUNG</b><br>especially suitable for<br><b>CONTOUR CAT</b>     | from<br>62 |
|  | Tool-System<br>for recesses with 45° edge<br><b>GADIA DONUT PLUS</b><br><b>Finger router</b> | 66         |
|  | Cutting discs<br><b>GADIA CUT</b>                                                            | from<br>67 |
|  | Milling wheels<br><b>GADIA CUP</b>                                                           | from<br>71 |

| Picture                                                                             | Name                                                                                                                                                                     | Page    |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
|    | Polishing and grinding tools<br><b>GADIA- RESIN / EASY DRY</b>                                                                                                           | 74      |
|    | Diamond Drills<br><b>GADIA- CORE / DRILL / SUPERDRILL</b>                                                                                                                | from 76 |
|    | Jigsaw blades and accessories<br><b>Stichsäge PGS</b>                                                                                                                    | 78      |
|   | Accessories<br><b>POLIFOX / JOKER</b><br><b>TURBOCUT / TYPHOON / TORNADO</b><br><b>LIONCUT / SMART CUTTER / DOMINATOR</b><br><b>CONTOUR CAT</b><br><b>NASS-MASCHINEN</b> | from 79 |
|  | Accessories<br><b>General</b>                                                                                                                                            | 81      |
| <b>DUST EXTRACTION</b>                                                              |                                                                                                                                                                          |         |
|  | <b>DUSTCLEANER 200</b><br>1,100 Watt • 3,240 L./min.<br>and accessories                                                                                                  | 82      |
|  | <b>DUSTCLEANER 300</b><br>1,200 Watt • 4,500 L./min.<br>and accessories                                                                                                  | 82      |
|  | <b>CYCLONE 501</b><br>Pre-separator and accessories                                                                                                                      | 83      |



# GALESKI



## **GALESKI is your specialist for professional stone processing**

Galeski - Manufaktur innovativer Maschinen  
Boschstr. 4  
D-56457 Westerburg  
Tel.: +49 (0)2663 9437-0  
E-Mail: [info@galeski.de](mailto:info@galeski.de)

Subject to technical modifications and error. Actual product may differ slightly from the depictions shown.  
All prices exclude VAT. Prices subject to change due to market fluctuations..  
Issue: Feb. 2026 | All previous catalogs are no longer valid as of this publication.

YOUR DISTRIBUTOR